

Crimp - Validation

DELPHI

product: DELPHI PN 12084200

material: CUSN

VERSION VII

surface: SN

material thickness: 0,25 mm

cross section [mm²]: 0,5

strip length: 5,00 mm

cable type: FLRY-B

insulation ø [mm]: 1,40 - 1,60

seal: DPN 10737671

Uncontrolled Copy
For Information only!


conductor dimension					crimp dimension [mm]					
cable type	cross sect. [mm ²]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation			
					height ± 0,03	width ± 0,10	height ± 0,10	width ± 0,10	height ± tol.	width ± tol.
FLRY-B	0,5	16 x 0,21	1,50	80	1,10	1,60	3,10	4,10		

core:
C-1.50-4.0-10
DPN 10713727


insulation:
IS-4.00-3.0-12
DPN 10804820

anvil:
ASR-1.50-4.00-8.6-3.7-0.6
DPN 10714015

two piece anvil:
AC-1.50-4.25
DPN 10791611
AI-4.00-4.4-0.6
DPN 10806984

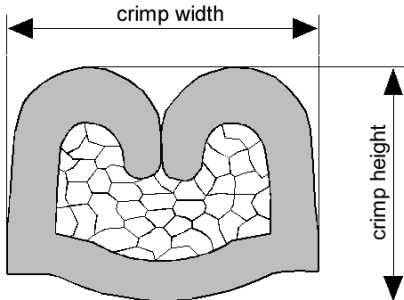

DELPHI PN 12084200

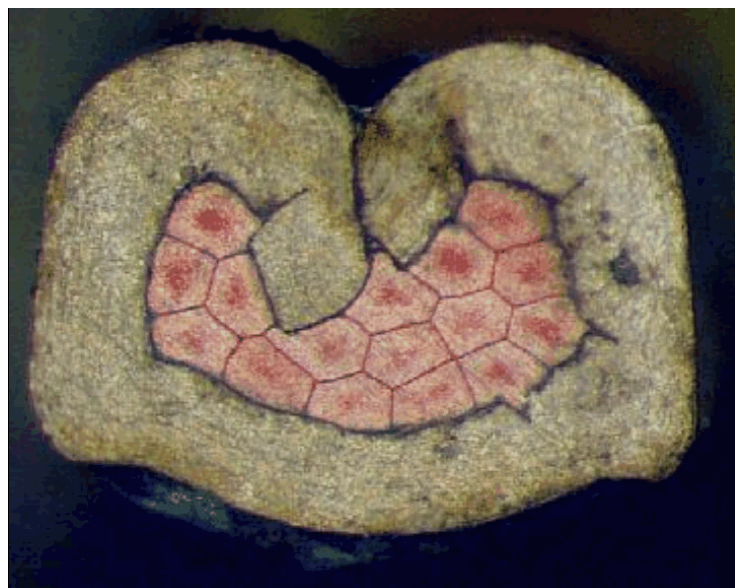

cable:
0,50 mm² = 16 x 0,21 mm

crimp height:
1,10 mm

crimp width:
1,60 mm