

1379668-2 ✓ ACTIVE




## TH/.025 Connector System

TE Internal #: 1379668-2

Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 24 Position, .087 in [2.2 mm] Centerline, Gray, TH/.025 Connector System

[View on TE.com >](#)

Connectors > Automotive Connectors > Connector Housings > TH/.025 CONNECTOR SYSTEM, HOUSING

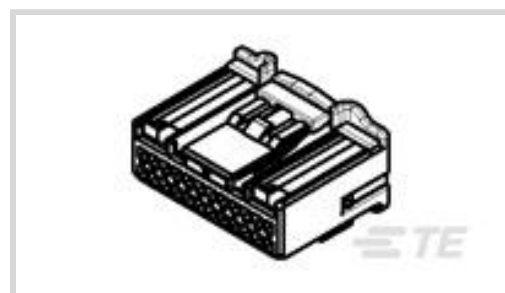

Connector & Housing Type: **Housing for Female Terminals**

Mating Tab Width: **.64 mm [ .025 in ]**

Connector System: **Wire-to-Board, Wire-to-Device, Wire-to-Wire**

Number of Positions: **24**

Centerline (Pitch): **2.2 mm [ .087 in ]**

[All TH/.025 CONNECTOR SYSTEM, HOUSING \(202\)](#)

## Features

### Product Type Features

Connector & Housing Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Board, Wire-to-Device, Wire-to-Wire
Sealable	No
Hybrid Connector	No
Primary Locking Feature	On the Terminal

### Configuration Features

Number of Positions	24
Number of Rows	2

### Electrical Characteristics

Operating Voltage	14 VDC
Nominal Voltage Architecture	12 V

### Body Features

Cable Exit Angle	180°
Body Material	PBT
Primary Product Color	Gray



Connector Code	2
----------------	---

### Contact Features

Contact Size	.63mm
Contact Type	Receptacle
Mating Tab Width	.64 mm[.025 in]

### Mechanical Attachment

Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

### Housing Features

Centerline (Pitch)	2.2 mm[.087 in]
--------------------	-----------------

### Dimensions

Product Width	21 mm[.827 in]
Product Length	28.6 mm[1.126 in]
Product Height	15.8 mm[.622 in]
Row-to-Row Spacing	3 mm[.118 in]

### Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C [158 °F][167 °F][176 °F][185 °F][194 °F][212 °F]
Operating Temperature Range	-40 – 100 °C[-40 – 212 °F]

### Operation/Application

Circuit Application	Signal
---------------------	--------

### Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

### Packaging Features

Packaging Quantity	500
Packaging Method	Bag

### Other



Serviceable	Yes
Connector Position Assurance Capable	No

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts



TE Part # 1379681-2  
24W TAB HSG ASSY GRAY



TE Part # CAT-T319-T273  
TH/.025 CONNECTOR SYSTEM,  
RECEPT AND TAB




TE Part # CAT-SIGH262  
SIGNAL HEADER

### Also in the Series | TH/.025 Connector System



Automotive Connector Caps &amp; Covers (6)

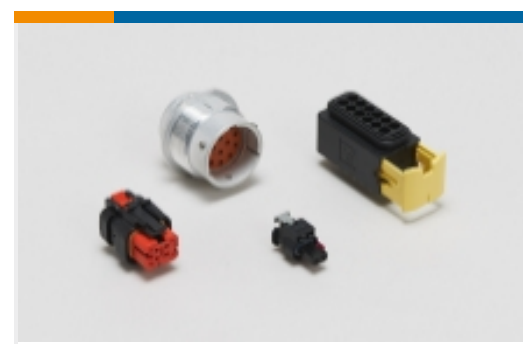

Automotive Housings(203)



Automotive Seals &amp; Cavity Plugs(2)




Automotive Terminals(25)



Insertion &amp; Extraction Tools(4)




Other Automotive Connector Accessories(5)

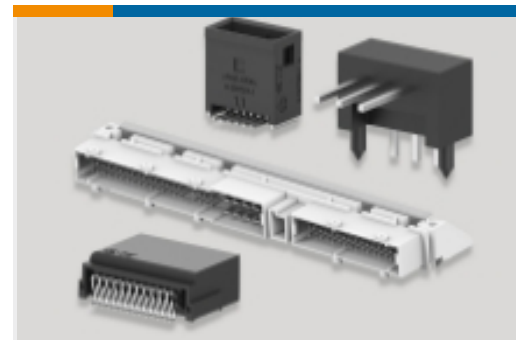

PCB Headers &amp; Receptacles(144)

## Customers Also Bought

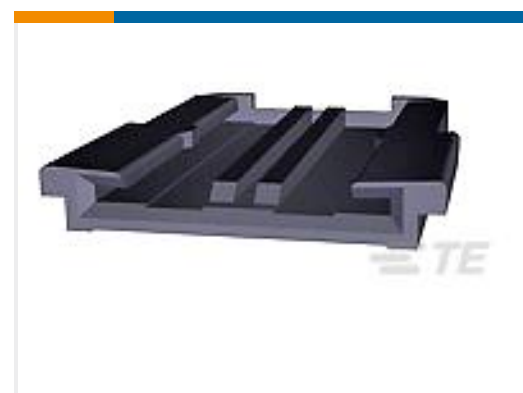TE Part #1379671-2  
TH/.025 CONNECTOR SYSTEM,  
HOUSINGTE Part #1393449-1  
V23540A1000Y452=VERSCHL.26P.TE Part #1801431-1  
RCPT CONT, 8MM NG1+, MAXIFUSE,  
2.5-4 MM2TE Part #1801432-1  
RCPT CONT, 8MM NG1+, MAXIFUSE,  
5-6 MM2TE Part #1801617-1  
FUSES AND RELAYS HOLDER 6  
MINIFUSESTE Part #1801618-1  
RELAY 40A HOLDERTE Part #1801619-1  
RELAY 70A HOLDER

## Documents

### Product Drawings

24W PLUG HSG ASSY grey

English

### CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1379668-2\_F.2d\_dxf.zip



English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_1379668-2\\_F.3d\\_igs.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_1379668-2\\_F.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

## Datasheets & Catalog Pages

[TH/.025 Connector Series](#)

English

---

## Product Specifications

[Packaging specification for TH Tab en Plug \(TH TES\)](#)

English

[Product Specification](#)

English

---

## Instruction Sheets

[Instruction Sheet \(non U.S.\)](#)

English