

product: DELPHI PN 15304732

material: CUZN9SN3

VERSION II

surface: SN

material thickness: 0,30 mm

cross section [mm²]: 2,0 | 2,5 | 3,0

strip length: 4,60 mm

cable type: IRT2

insulation ø [mm]: 2,50 - 3,45

seal: DPN 15366066 (2,0)
DPN 15366067

**Uncontrolled
Copy
For Information only!**


conductor dimension					crimp dimension [mm]					
cable type	cross sect. [mm ²]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation			
					height ± 0,05	width ± 0,10	height ± 0,10	width ± 0,10	height ± tol.	width ± tol.
IRT2	2,0	37 x 0,25	2,70	230	1,70	2,60	4,90	5,00		
IRT2	2,5	37 x 0,29	2,85	250	1,85	2,60	5,00	5,00		
IRT2	3,0	45 x 0,29	3,35	300	2,00	2,65	5,10	5,00		

core:
C-2.50-3.5-19
DPN 10713724


insulation:
IS-5.00-3.0-19-X GD 66,0
DPN 10713814

anvil:
AS-2.50-5.00-8.3-3.3-1.0
DPN 10739728

two piece anvil:
AC-2.50-3.75
DPN 10769936
AI-5.00-4.4-1.0
DPN 10807119

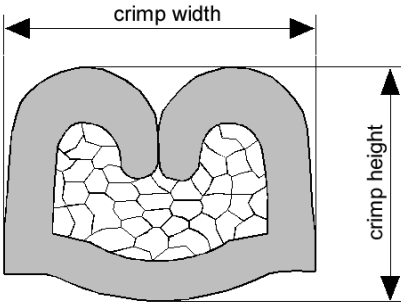


DELPHI PN 15304732

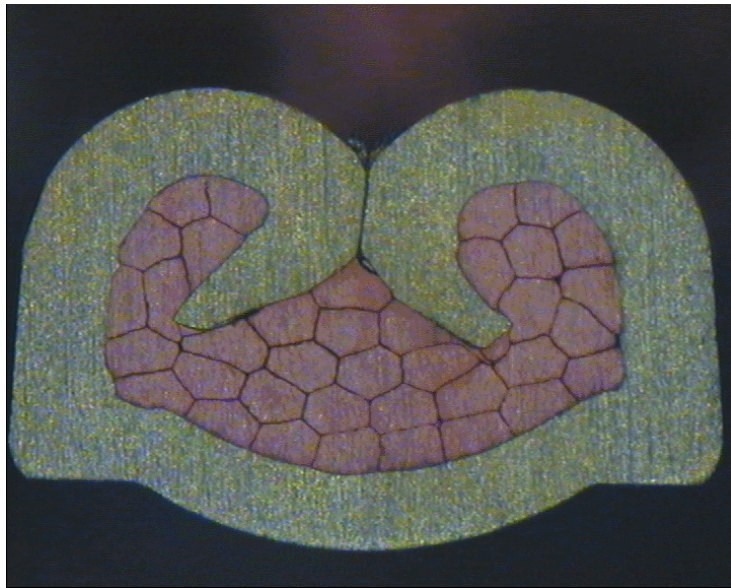

cable:
 $2,00 \text{ mm}^2 = 37 \times 0,25 \text{ mm}$

crimp height:
1,70 mm


crimp width:
2,60 mm

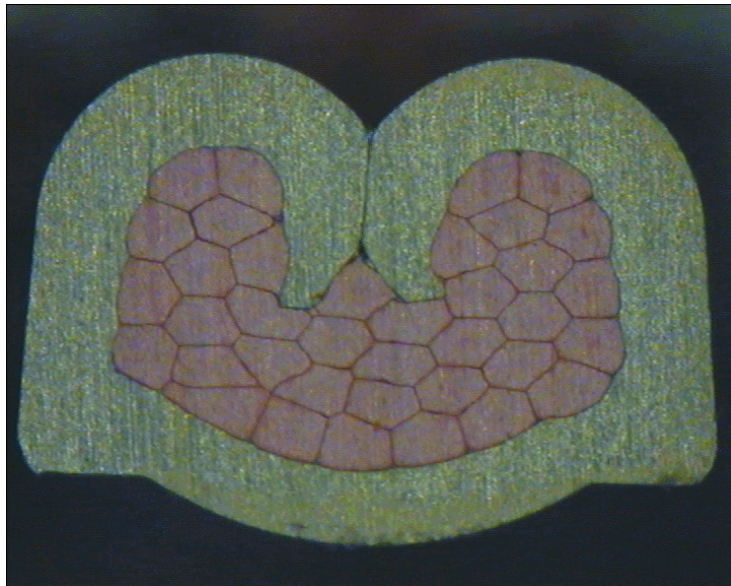

cable:
 $2,50 \text{ mm}^2 = 37 \times 0,29 \text{ mm}$

crimp height:
1,85 mm

crimp width:
2,60 mm

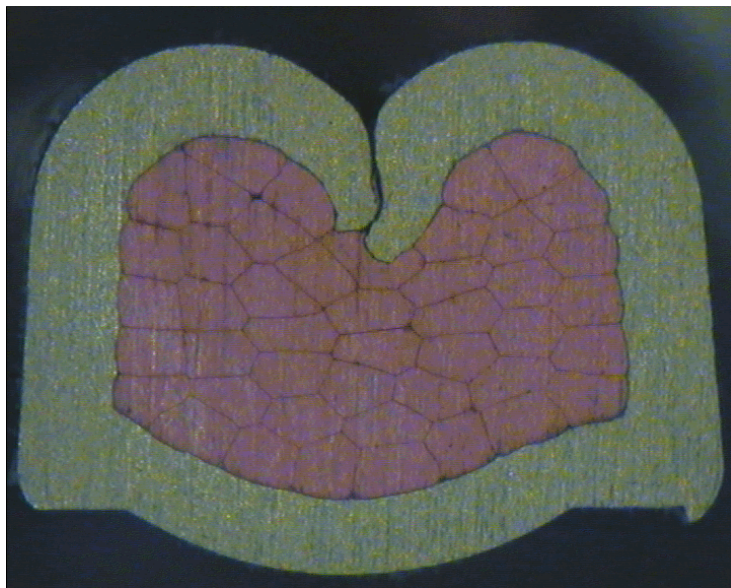

cable:
 $3,00 \text{ mm}^2 = 45 \times 0,29 \text{ mm}$

crimp height:
2,00 mm

crimp width:
2,65 mm