

MCON Interconnection System

TE Internal #: 1488991-6 Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 3 Position, .157 in [4 mm] Centerline, MCON Interconnection System

View on TE.com >



Connectors > Automotive Connectors > Connector Housings > MCON, CONNECTOR HOUSING



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 1.2 mm [.047 in]

Connector System: Wire-to-Board, Wire-to-Device, Wire-to-Wire

Number of Positions: **3**

Centerline (Pitch): 4 mm [.157 in]

All MCON, CONNECTOR HOUSING (283)

Features

Product Type Features

Connector & Housing Shape

Connector & Housing Type

Rectangular

Housing for Female Terminals

Connector System	Wire-to-Board, Wire-to-Device, Wire-to- Wire	
Sealable	Yes	
Hybrid Connector	No	
Primary Locking Feature	Integrated in Housing	
Configuration Features		
Number of Positions	3	
Number of Rows	1	
Body Features		
Body Material	PAGF	
Primary Product Color	Black	
Connector Code	В	
Contact Features		
Contact Size	1.2mm	
Contact Type	Receptacle	

Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 3 Position, .157 in [4 mm] Centerline, MCON Interconnection System



Mating Tab Width	1.2 mm[.047 in]	
Mechanical Attachment		
Mounting Feature	Without	
Terminal Position Assurance	Yes	
Strain Relief	Add By Accessory	
Mating Alignment Type	Keyed	
Mating Alignment	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Centerline (Pitch)	4 mm[.157 in]	
Dimensions		
Product Width	26.5 mm[1.043 in]	
Product Length	19 mm[.748 in]	
Product Height	15.6 mm[.614 in]	
Usage Conditions		
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[158 °F][167 ° F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F]	
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]	
Operation/Application		
Circuit Application	Signal	
Industry Standards		
Degree of Protection	IP67	
Packaging Features		
Packaging Quantity	1	
Packaging Method	Package	
Other		
Serviceable	Yes	

Product Compliance

For compliance documentation, visit the product page on TE.com>

Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 3 Position, .157 in [4 mm] Centerline, MCON Interconnection System



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-

Compatible Parts







Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 3 Position, .157 in [4 mm] Centerline, MCON Interconnection System



Also in the Series | MCON Interconnection System

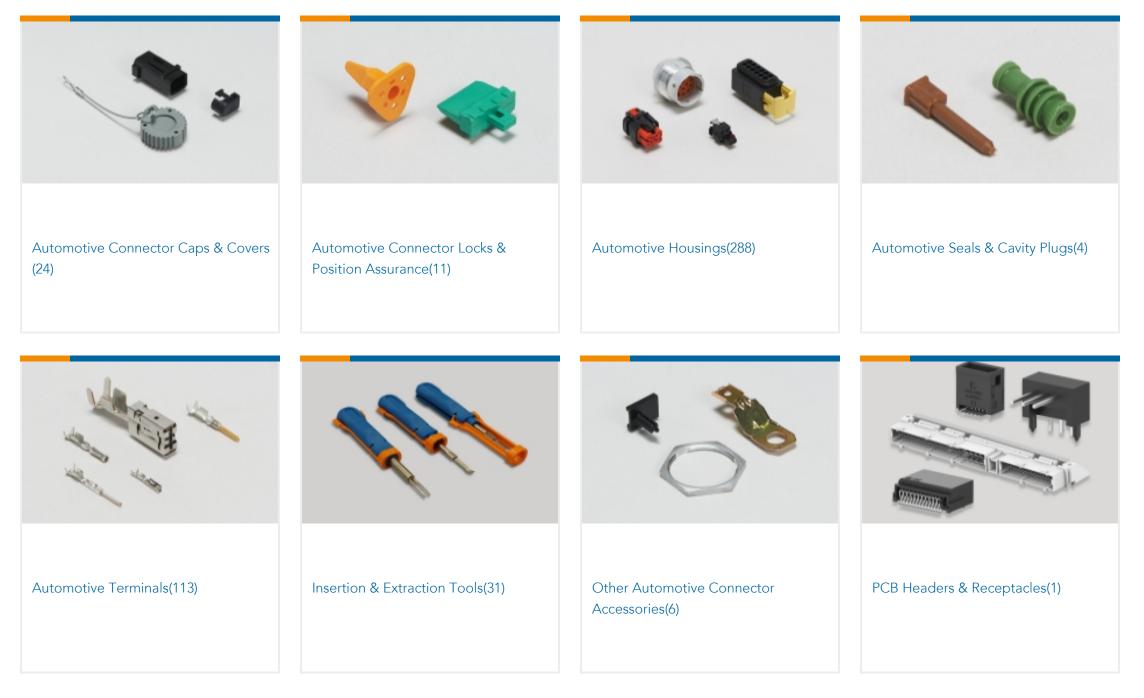


Customers Also Bought







		= TE	= TE
TE Part #2-967642-1	TE Part #1-2308331-2	TE Part #1418850-3	TE Part #1456968-2
3POS MQS REC SEALED COD B	M12 STRAIGHT D4 PG CLAMP	MCON, RECEPTACLE AND TAB	CONTACT,FEMALE, 0.64, 18 AWG, AG

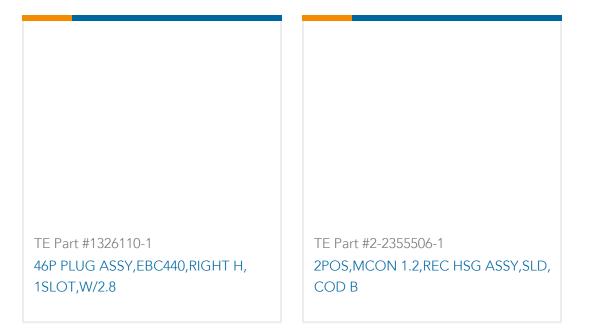

Documents

Product Drawings 3POS, MCON 1.2 CB REC 2p TL SEALED

English

CAD Files

Customer View Model ENG_CVM_CVM_1488991-6_D.2d_dxf.zip

Housing for Female Terminals, Wire-to-Wire / Wire-to-Device / Wire-to-Board, 3 Position, .157 in [4 mm] Centerline, MCON Interconnection System



English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1488991-6_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1488991-6_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages MCON Interconnection System

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Instruction Sheet (U.S.)

English