

product: DELPHI PN 13597856
 material: CUSN
 surface: F.SN3
 material thickness: 0,20 mm
 cross section [mm²]: 0,22 | 0,35

strip length: 3,50 mm
 cable type: FLRY-A
 insulation ø [mm]: 1,10 - 1,30
 seal:

**Uncontrolled
Copy**
For Information only!


conductor dimension					crimp dimension [mm]					
cable type	cross sect. [mm²]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation			
					height ± 0,03	width ± 0,10	height ± 0,10	width ± 0,10	height ± tol.	width ± tol.
FLRY-A	0,22	7 x 0,21	1,15	30	0,80	1,40	1,30	1,70		
FLRY-A	0,35	7 x 0,26	1,25	50	0,85	1,45	1,45	1,80		

core:
 C-1.40-2.5-6-X
 DPN 10713739


insulation:
 IS-1.80-2.5-6
 DPN 10713806

anvil:

two piece anvil:
 AC-1.40-2.75
 DPN 10764103
 AI-1.80-3.2-0.2
 DPN 10806811

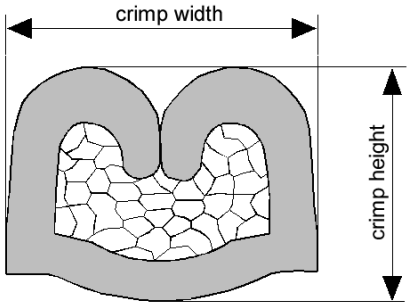

DELPHI PN 13597856

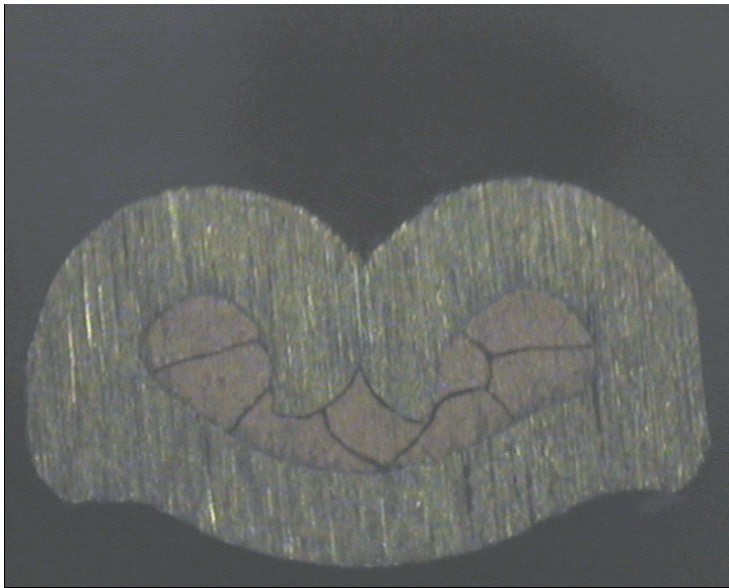

cable:
 $0,22 \text{ mm}^2 = 7 \times 0,21 \text{ mm}$

crimp height:
0,80 mm

crimp width:
1,40 mm



cable:
 $0,35 \text{ mm}^2 = 7 \times 0,26 \text{ mm}$

crimp height:
0,85 mm

crimp width:
1,45 mm