
# 174057-2 - ACTIVE

### AMP | Multilock Connector System

TE Internal #: 174057-2 Housing for Male Terminals, Wire-to-Wire, 2 Position, .102 in [2.6 mm] Centerline, Black, Signal, Multilock Connector System View on TE.com >



Connectors > Automotive Connectors > Connector Housings > MULTILOCK, CONNECTOR HOUSING

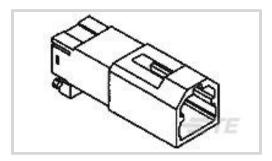

#### Connector & Housing Type: Housing for Male Terminals

Mating Tab Width: 1 mm [.039 in ]

Connector System: Wire-to-Wire

Number of Positions: 2

Centerline (Pitch): 2.6 mm [.102 in ]

### All MULTILOCK, CONNECTOR HOUSING (576)

### Features

### Product Type Features

Connector & Housing Shape

Connector & Housing Type

 Rectangular

Housing for Male Terminals

Connector System	Wire-to-Wire
Sealable	No
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Configuration Features	
Number of Positions	2
Number of Rows	1
Electrical Characteristics	
Operating Voltage	12 VDC
Nominal Voltage Architecture	12 V
Body Features	
Cable Exit Angle	180°
Body Material	PBT
Primary Product Color	Black
Contact Features	

Housing for Male Terminals, Wire-to-Wire, 2 Position, .102 in [2.6 mm] Centerline, Black, Signal, Multilock Connector System



Contact Size	1mm
Contact Type	Tab
Mating Tab Width	1 mm[.039 in]
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	2.6 mm[.102 in]
Dimensions	
Product Width	9.5 mm[.374 in]
Product Length	28.3 mm[1.114 in]
Product Height	10.8 mm[.425 in]

## Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C[158 °F][167 °F][176 °F][185 °F][194 °F] [212 °F][221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Quantity	100
Packaging Method	Bag
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Housing for Male Terminals, Wire-to-Wire, 2 Position, .102 in [2.6 mm] Centerline, Black, Signal, Multilock Connector System



### Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## **Compatible Parts**

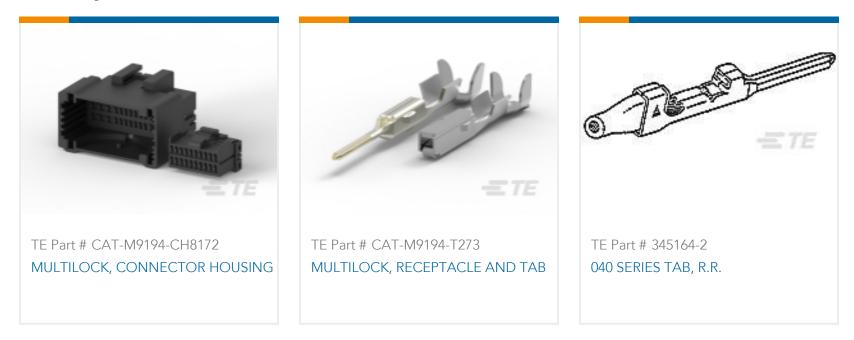

## Also in the Series | Multilock Connector System

Housing for Male Terminals, Wire-to-Wire, 2 Position, .102 in [2.6 mm] Centerline, Black, Signal, Multilock Connector System




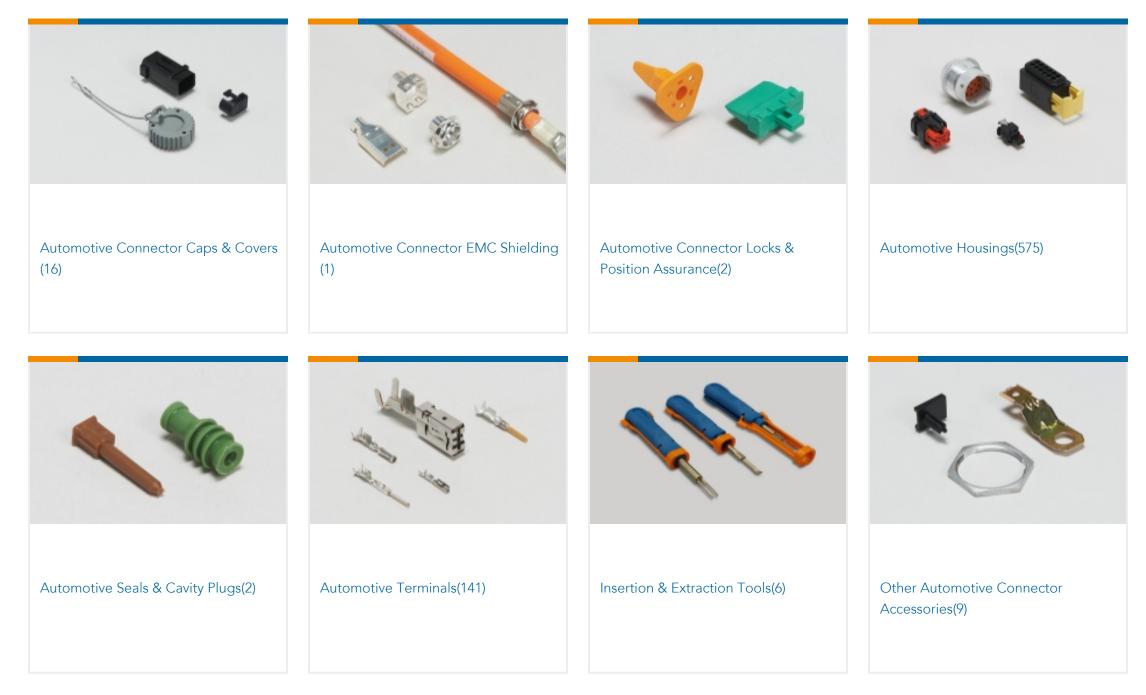



PCB Headers & Receptacles(129)

## Customers Also Bought

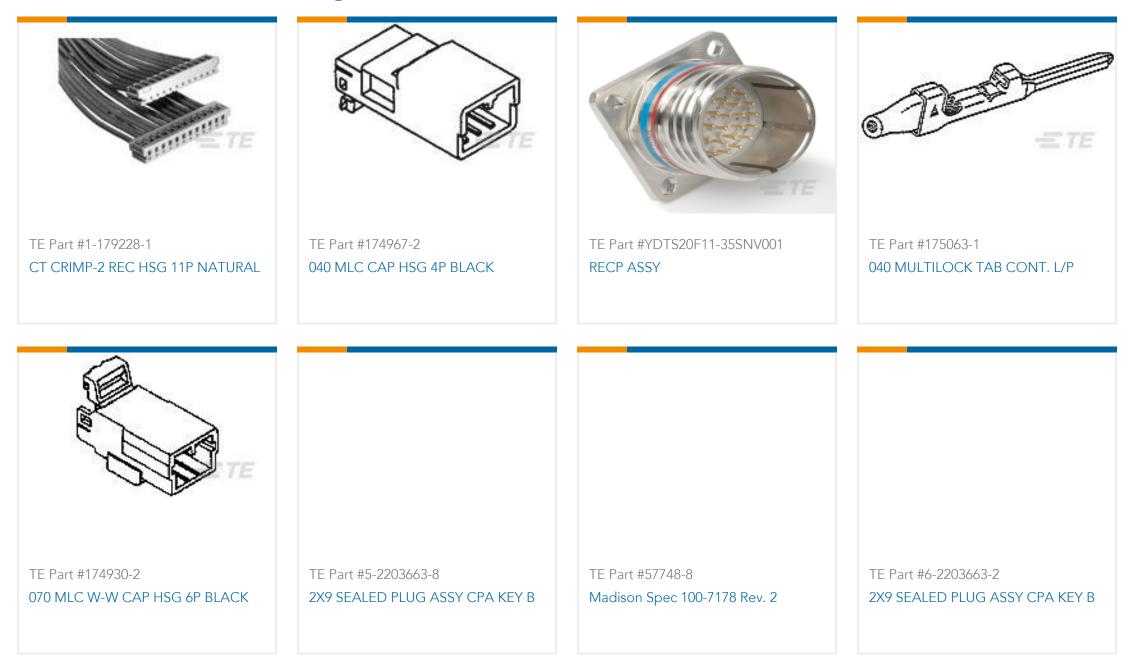

Housing for Male Terminals, Wire-to-Wire, 2 Position, .102 in [2.6 mm] Centerline, Black, Signal, Multilock Connector System



TE Part #6-2203663-6 2X9 SEALED PLUG ASSY CPA KEY C

### Documents

### Product Drawings 040 MULTILOCK CAP 2P

Japanese

#### **CAD** Files

Customer View Model ENG\_CVM\_CVM\_174057-2\_J.2d\_dxf.zip

English

### 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_174057-2\_J.3d\_igs.zip

English

Customer View Model

### ENG\_CVM\_CVM\_174057-2\_J.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages MULTILOCK Connector System

English

**Product Specifications** 

Product Specification

Japanese

040 Series Multi-Lock Connector wire to wire type

Japanese

**Product Specification** 

Japanese

040 Series Multi-Lock Connector wire to wire type

Japanese

Product Environmental Compliance MD\_174057-2\_12132017345\_dmtec

English

MD\_174057-2\_12132017345\_dmtec

**C** For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 2 Position, .102 in [2.6 mm] Centerline, Black, Signal, Multilock Connector System



English

Instruction Sheets Instruction Sheet (non U.S.) English O40 SERIES MULTI-LOCK CONNECTOR English