

154718-6 ✓ ACTIVE

Positive Lock | Positive Lock 250

TE Internal #: 154718-6

Quick Disconnects, Receptacle, 18 – 14 AWG Wire Size, .82 – 2.08 mm² Wire Size, Mating Tab Width .25 in [6.35 mm], Straight, Positive Lock 250

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: .82 – 2.08 mm²

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

Features

Product Type Features

Terminates To	Wire & Cable
Wire/Cable Type	FLK
Wire Stop	No
Insertion Force	Low
Sealable	No

Configuration Features

Connection Capacity	Single
---------------------	--------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Straight
Contact Base Material	Phosphor Bronze
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp



Barrel Type	Open
-------------	------

Mechanical Attachment

Mating Retention Type	Dimple
Extraction Force	7 – 100 Newton
Wire Insulation Support	With

Dimensions

Accepts Wire Insulation Diameter Range	2.4 – 3.2 mm [.094 – .126 in]
Receptacle Terminal Stock Thickness	.41 mm [.016 in]
Overall Length	22.5 mm [.886 in]
Wire Size	.82 – 2.08 mm ²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C [-40 – 230 °F]

Industry Standards

UL Rating	Recognized
-----------	------------

Packaging Features

Packaging Quantity	1500
Packaging Method	Strip/Reel

Other

Comment	FLK-Wire: Normal Wire
---------	-----------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2305570-1
TERMINAL CUTTER, SIDE FEED



TE Part # 525651
DAHT POSITIVE LOCK 18-11 ASSY



TE Part # 142685-5
LI.F PL CONTACT 5MM 0.35-1 MM2 PTPPHBZ




TE Part # 2-2151137-2
OCEAN_2.0_APPLICATOR-S-110F155F



TE Part # 2151137-2
OCEAN_2.0_APPLICATOR-S-110F155F




TE Part # 7-2151137-2
OCEAN_2.0_APPLICATOR-S-110F155F

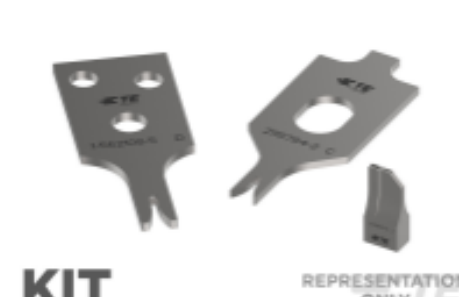


TE Part # 7-2151137-7
OCEAN_2.0_SPARE_PART_KIT-110F155F


Also in the Series | Positive Lock 250



Automotive Terminals(1)

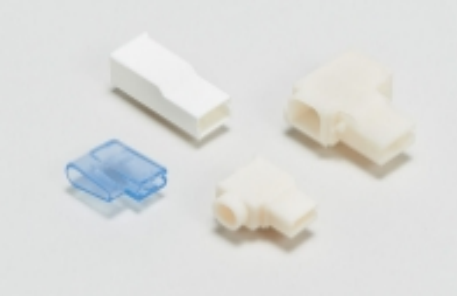

Crimp Terminal Housings(203)



Insertion & Extraction Tools(3)



Insulation Boots & Sleeves(4)



Quick Disconnects(189)

Customers Also Bought

TE Part #165143
PG WIRE PIN 22-16TE Part #5053184028
RNF-100-3/8-9-SPTE Part #5053084023
RNF-3000 Single Wall Stick Heat ShrinkTE Part #1989065-1
44POS,ECONOSEAL,REC HSG ASSY,
UNSLDTE Part #NB11556001
ATUM-6/2-0-30MMTE Part #284366-2
40 POS. MALE CONN. ASSY -BROWNTE Part #154565
3 WAY PIN HOUSING M-N-LTE Part #154566
3 WAY SOCKET HOUSING M-N-TE Part #282994-4
20 POS. .070 NEW GEN. ASSY - G

Documents

Product Drawings

250 PL MKI REC. 18-14AWG PTPB

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_154718-6_AS.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_154718-6_AS.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_154718-6_AS.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[1654742_HOUSEHOLD_APPLIANCES_RAST5](#)

English

Product Specifications

[Application Specification](#)

German

[Application Specification](#)

English

[Application Specification](#)

English