



Power Triple Lock

TE Internal #: 1971784-1


Power Contacts, Contact, 600 VAC, 600 VDC, Pre-Tin, 19 – 16 AWG

Wire Size, .65 – 1.3 mm² Wire Size, Wire-to-Wire, Wire & Cable,

Power Triple Lock

[View on TE.com >](#)

Connectors > Power Connectors > Power Contacts > POWER TRIPLE LOCK TAB CONTACT

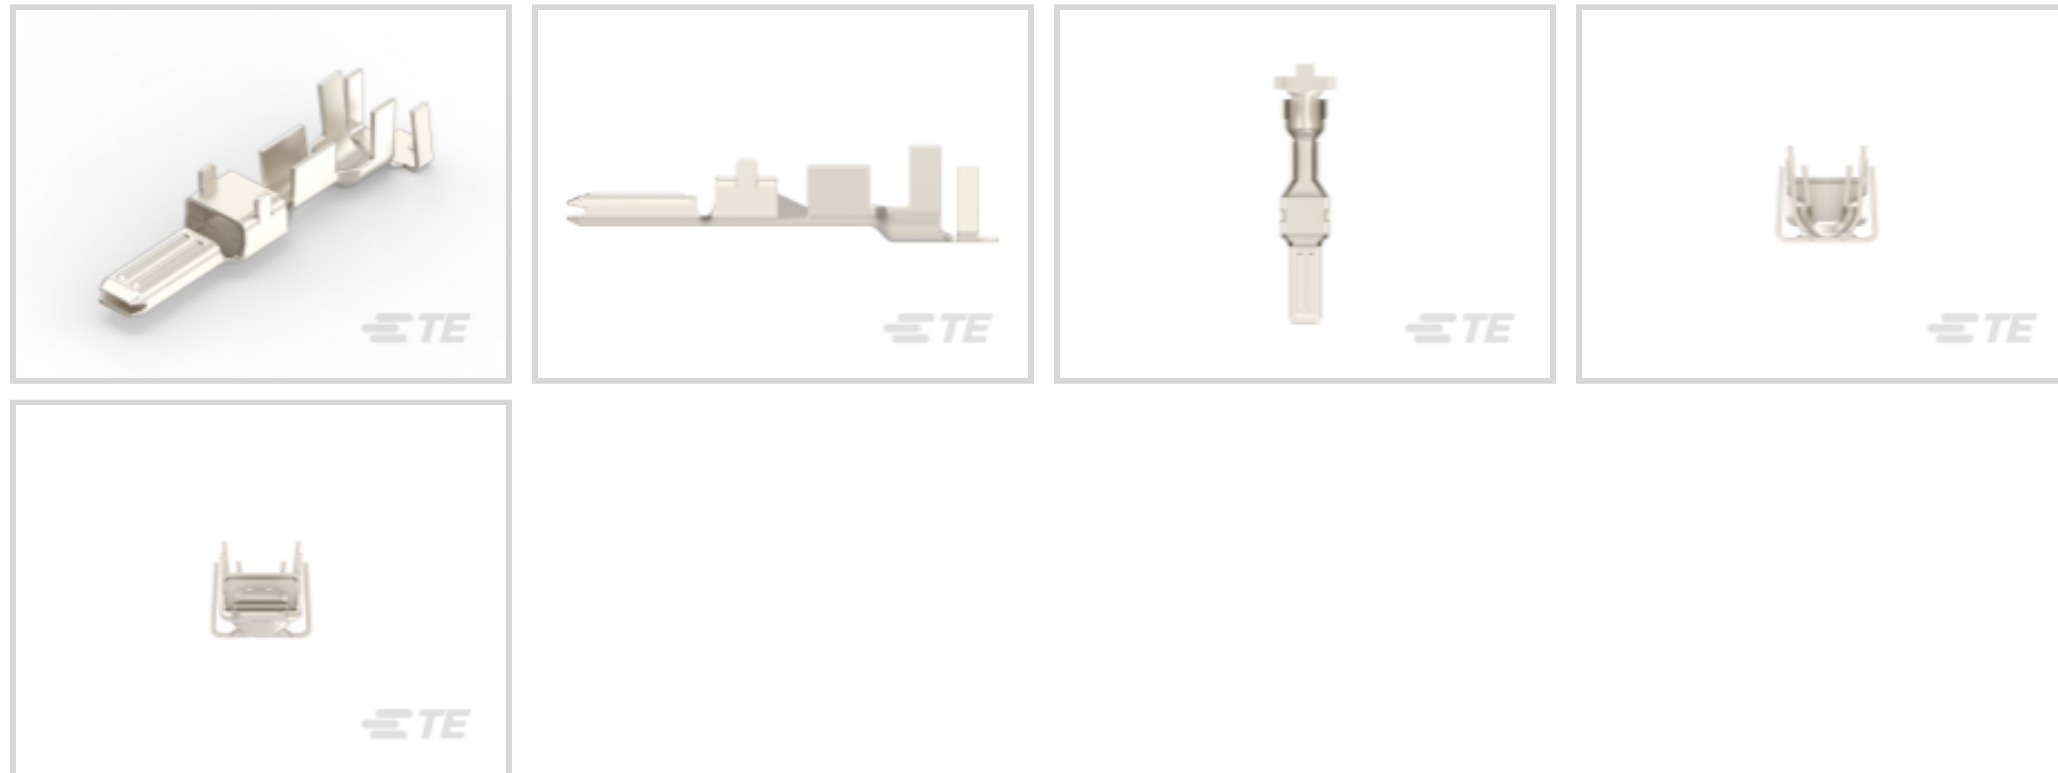

Power Contact Type: **Contact**

Operating Voltage: **600 VDC**

Contact Mating Area Plating Material: **Pre-Tin**

Wire Size: **19 – 16 AWG**

All POWER TRIPLE LOCK TAB CONTACT (12)

Features

Product Type Features

Power Contact Type	Contact
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable

Electrical Characteristics

Continuous Current Rating	12 A
Operating Voltage	600 VDC

Contact Features

Contact Mating Area Plating Material	Pre-Tin
Contact Current Rating (Max)	12 A
Contact Type	Tab
Contact Retention Within Housing	Without
Mating Tab Width	2.7 mm[.106 in]
Mating Tab Thickness	1.63 mm[.064 in]



Contact Base Material	Brass
Wire Contact Termination Area Plating Thickness	.8 – 2.5 µm[31.49 – 98.4 µin]
Wire Contact Termination Area Plating Material	Pre-Tin
Wire Contact Termination Area Plating Material Finish	Bright
Contact Orientation	Straight

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
Wire Insulation Support	With

Dimensions

Wire Size	.65 – 1.3 mm ²
Accepts Wire Insulation Diameter Range	2 – 3.3 mm[.079 – .13 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

VDE Tested	Yes
Agency/Standard	UL, VDE

Packaging Features

Packaging Method	Reel
------------------	------

Other

Wire/Cable Type	Discrete Wire
For Use With	Cap Housing
Comment	Complies with IEC 61984 Specification

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold



EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JAN 2022 (223)

Candidate List Declared Against: JAN 2022 (223)

Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-P87074-C1701B
POWER TRIPLE LOCK: Glow Wire Cap



TE Part # CAT-P87074-C1701
POWER TRIPLE LOCK STD TEMP CAP



TE Part # CAT-P87074-P729
POWER TRIPLE LOCK STD TEMP PLUG



TE Part # CAT-P87074-C1701A
POWER TRIPLE LOCK HIGH TEMP CAP



TE Part # 1452426-1
EXTRACTION TOOL



TE Part # 1-2232263-1
PTL 1X2 CAP PANEL MT HOT WIRE KEY A BLK






TE Part # 2305570-1
TERMINAL CUTTER, SIDE FEED



TE Part # 2217208-1
SDE COMMERCIAL TOOL AND DIE



Also in the Series | **Power Triple Lock**

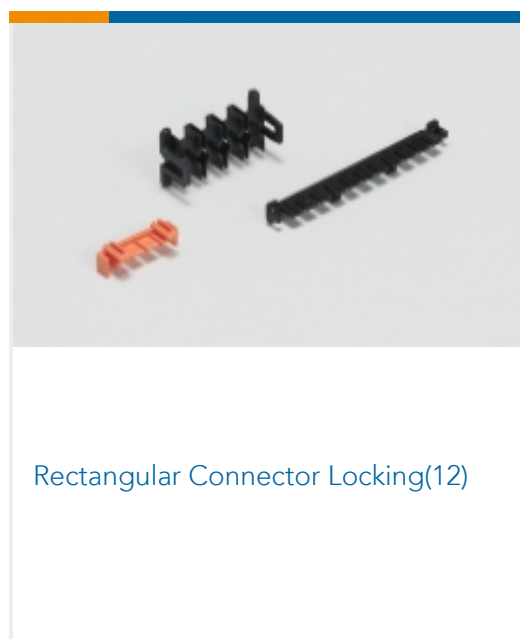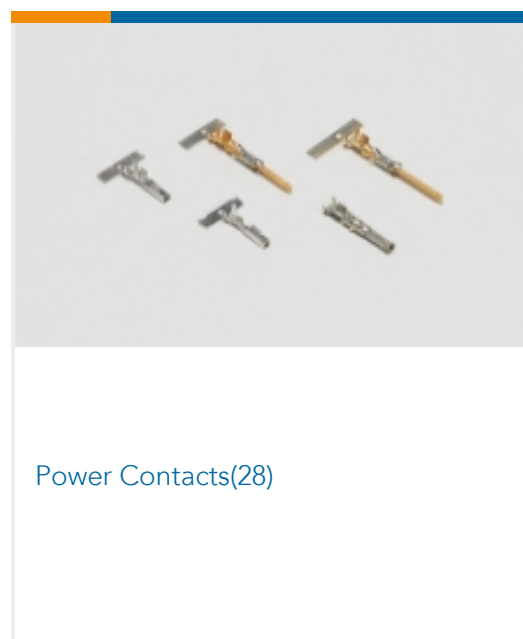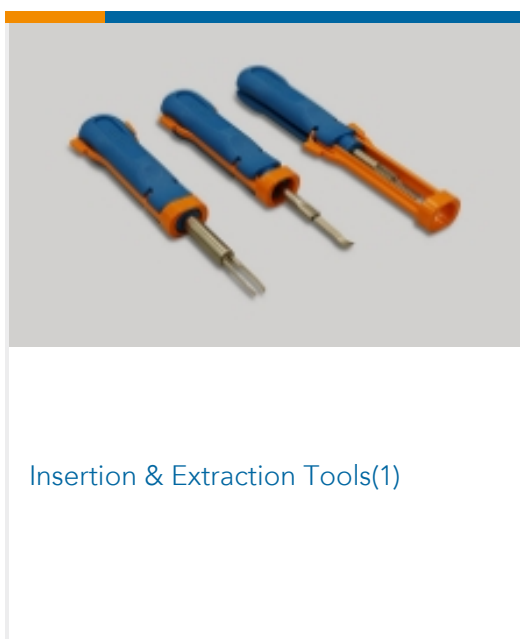


Customers Also Bought





TE Part #1971783-1
PTL RECEPTACLE CONTACT, 16-19
AWG, 2X22

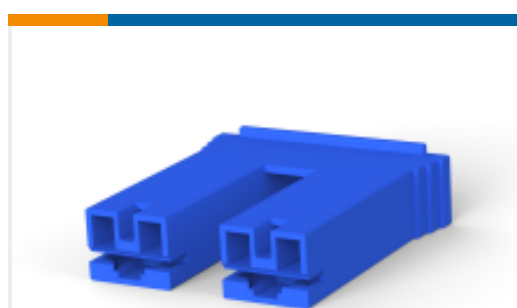

TE Part #4-520935-3
250 HSG. PL MKII REC. 15.11mm 2P
BLUE



TE Part #2-1971778-4
PTL 2X4 LOCKING PLATE HWI
NATURAL

Documents

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_1971784-1_E.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1971784-1_E.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1971784-1_E.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Make First, Break Last Power Triple Lock Connector](#)

English

[1-1773734-9 TE Power Triple Lock Quick Reference Guide - German](#)

German

[9-1773465-1 Power Triple Lock QRG](#)

English

Product Specifications

[Application Specification](#)

English

[Application Specification](#)

English

Product Environmental Compliance

[MD_1971784-1_03232018726_dmtec](#)

English

[MD_1971784-1_03232018726_dmtec](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)



English

[Agency Approvals](#)

[VDE Certificate](#)

English