


AMP | LEAVYSEAL TE Internal #: 5-1718321-3 Housing for Female Terminals, Wire-to-Board / Wire-to-Wire / Wireto-Device, 39 Position, .197 in [5 mm] Centerline, Sealable, Green, LEAVYSEAL

#### View on TE.com >

Connectors > Automotive Connectors > Connector Housings > LEAVYSEAL HOUSINGS

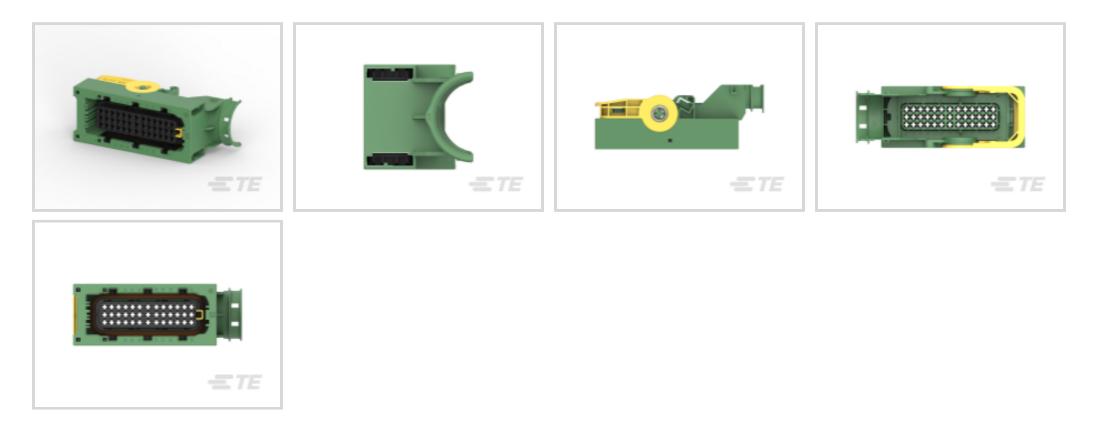

Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 2.8 mm [.11 in]

Connector System: Wire-to-Board, Wire-to-Device, Wire-to-Wire

Number of Positions: **39** 

Centerline (Pitch): 5 mm [.197 in ]

### All LEAVYSEAL HOUSINGS (62)



## Features

#### Product Type Features

Connector & Housing Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Board, Wire-to-Device, Wire-to- Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	39
Number of Rows	3
Electrical Characteristics	
Operating Voltage	36 VDC
Nominal Voltage Architecture	12 V, 24 V

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire / Wire-to-Device, 39 Position, .197 in [5 mm] Centerline, Sealable, Green, LEAVYSEAL



## **Body Features**

Cable Exit Angle	90°
Body Material	PBT GF
Primary Product Color	Green
Contact Features	
Contact Size	2.8mm
Contact Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Contact Current Rating (Max)	40 A
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	With
Mating Alignment Type	Polarizing Rib
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

## Housing Features

Centerline (Pitch)	5 mm[.197 in]
Dimensions	
Product Width	46 mm[1.811 in]
Product Length	120.5 mm[4.744 in]
Product Height	44 mm[1.732 in]
Row-to-Row Spacing	5.5 mm[.217 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Degree of Protection	IP67, IP69K

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire / Wire-to-Device, 39 Position, .197 in [5 mm] Centerline, Sealable, Green, LEAVYSEAL



UL Flammability Rating	UL 94HB
ackaging Features	
Packaging Quantity	117
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No
Product Compliance	
Product Compliance	
Product Compliance	Compliant Compliant
Product Compliance or compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant
Product Compliance or compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	CompliantCompliantCompliantNo Restricted Materials Above ThresholdCurrent ECHA Candidate List: JAN 2022
Product Compliance for compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	CompliantCompliantCompliantNo Restricted Materials Above ThresholdCurrent ECHA Candidate List: JAN 2022 (223)Candidate List Declared Against: JAN 2022
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	CompliantCompliantCompliantNo Restricted Materials Above ThresholdCurrent ECHA Candidate List: JAN 2022

0

## ppm.

#### Solder Process Capability

#### Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

Housing for Female Terminals, Wire-to-Board / Wire-to-Wire / Wire-to-Device, 39 Position, .197 in [5 mm] Centerline, Sealable, Green, LEAVYSEAL








# Also in the Series LEAVYSEAL



1	connector	cups a covers	7.0

(16)

Accessories(15)

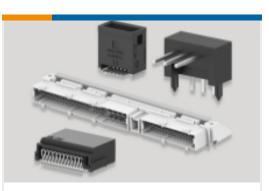

PCB Headers & Receptacles(13)

# Customers Also Bought



Housing for Female Terminals, Wire-to-Board / Wire-to-Wire / Wire-to-Device, 39 Position, .197 in [5 mm] Centerline, Sealable, Green, LEAVYSEAL



TE Part #W323137   TE Part #W323138   TE Part #W323140   TE Part #2-968976-1		
TE Part #W323137 TE Part #W323138 TE Part #W323140 TE Part #2-968976-1		
S5-A350, LEVEL SENSOR W/F STD S5-A400, LEVEL SENSOR W/F STD S5-A500, LEVEL SENSOR W/F STD MCP2.8 BU-GEH 3P		

## Documents

### **CAD** Files

Customer View Model

ENG\_CVM\_CVM\_5-1718321-3\_D.2d\_dxf.zip

English

### 3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_5-1718321-3\_D.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_5-1718321-3\_D.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

**Datasheets & Catalog Pages** 

ICT Terminals and Connectors Catalogue

English

Product Specifications **Application Specification** 

German