
# 6-968973-1 <

### AMP | AMP MCP 2.8, AMP MCP Connector System

TE Internal #: 6-968973-1 Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Blue, Signal, Cable Mount (Free-Hanging), Hybrid View on TE.com >



Connectors > Automotive Connectors > Connector Housings > AMP MCP, UNSEALED CONNECTOR HOUSING

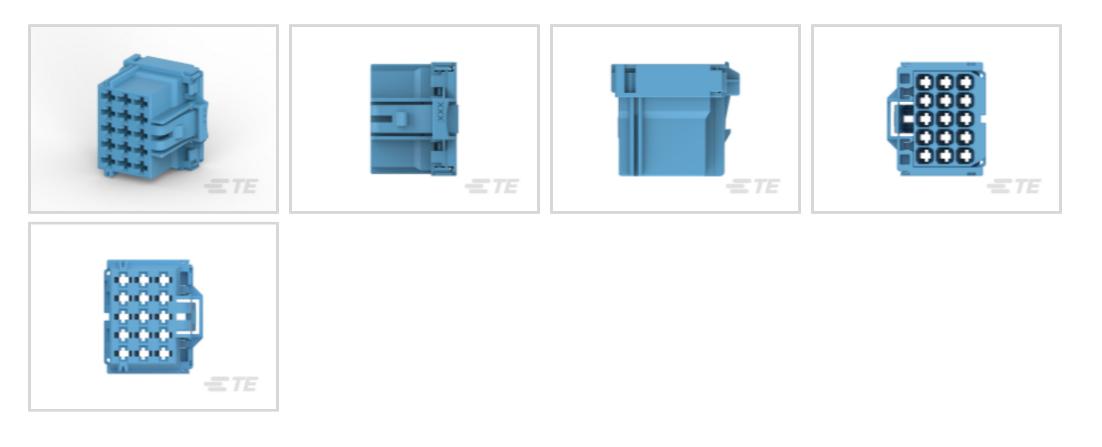

Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 2.8 mm [.11 in]

Connector System: Wire-to-Wire

Number of Positions: 15

Centerline (Pitch): 5 mm [.197 in ]

#### All AMP MCP, UNSEALED CONNECTOR HOUSING (187)

## Features

## Product Type Features

Connector & Housing Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	No
Hybrid Connector	No
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	15
Number of Rows	3
Electrical Characteristics	
Operating Voltage	28 VDC
Nominal Voltage Architecture	12 V, 24 V
Body Features	

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Blue, Signal, Cable Mount (Free-Hanging), Hybrid



Cable Exit Angle	180°
Body Material	PBT GF
Primary Product Color	Blue
Connector Code	С
Contact Features	
Contact Size	2.8mm
Contact Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	

Centerline (Pitch)

5 mm[.197 in]

## Dimensions

Product Width	31 mm[1.22 in]
Product Length	31 mm[1.22 in]
Product Height	24 mm[.945 in]
Row-to-Row Spacing	5.5 mm[.217 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	
Packaging Quantity	1200
Packaging Method	Carton

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Blue, Signal, Cable Mount (Free-Hanging), Hybrid



#### Other

Serviceable	No
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**




## Also in the Series AMP MCP 2.8

**&** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Blue, Signal, Cable Mount (Free-Hanging), Hybrid



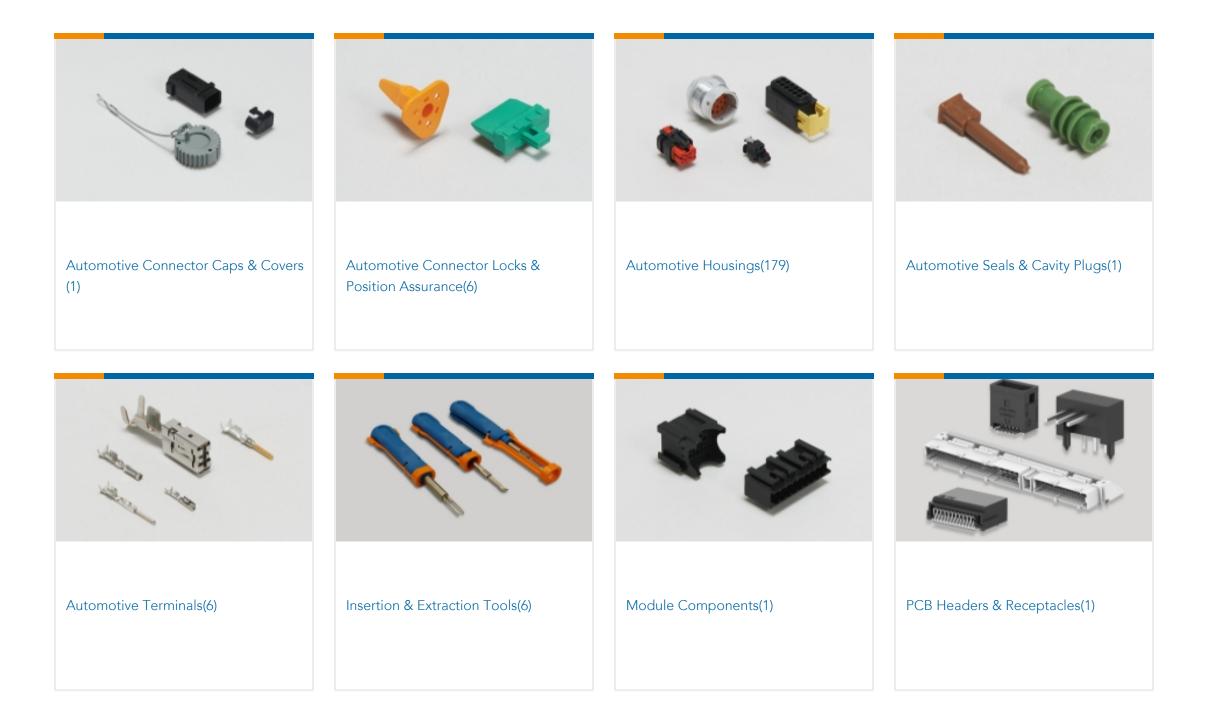

## Also in the Series AMP MCP Connector System




Automotive Connector Caps & Covers (24)	Automotive Connector Locks & Position Assurance(7)	Automotive Housings(352)	Automotive Seals & Cavity Plugs(6)
And a			
Automotive Terminals(125)	Insertion & Extraction Tools(13)	Other Automotive Connector Accessories(2)	PCB Headers & Receptacles(29)

Customers Also Bought

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Blue, Signal, Cable Mount (Free-Hanging), Hybrid



TE Part #3-968976-9 AMP MCP, UNSEALED CONNECTOR HOUSING	TE Part #1813344-1 7p 1.5mm socket housing assy' coding A	TE Part #1-2311124-1 LEVER,48POS,MCON 1.2	TE Part #1719000-1 36/76 POS CABLE ROUTER
TE Part #1813018-1 MINI FUSE RECEPTACLE	TE Part #1813018-4 MINI FUSE RECEPTACLE	TE Part #1813018-6 MINI FUSE RECEPTACLE	TE Part #2-1813018-3 MINI FUSE RECEPTACLE PITCH 7MM 2~3.0

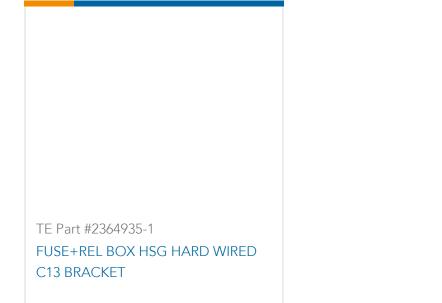

## Documents

Product Drawings MCP2.8 GEH ASSY 15P

English

CAD Files

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_6-968973-1\_F.2d\_dxf.zip

English

Customer View Model ENG\_CVM\_CVM\_6-968973-1\_F.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_6-968973-1\_F.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications** 

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Blue, Signal, Cable Mount (Free-Hanging), Hybrid



Application Specification

English

Product Environmental Compliance Product Compliance English

**Product Compliance** 

English