

Crimp - Specification

product : DELPHI PN 15440179
 material : CUNI3S11MG
 surface : F.SN3
 material thickness : 0,25 mm

 cross-sec. [mm²] : 0,35-4x


 strip length [mm] : 3,50


 cable type : UL-STYLE 2464

 insulation [φmm] :
 seal :

conductor dimension					crimp dimension [mm]				crimping tools		
cable type	cross-section [mm ²]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation		designation		
					height ± 0,03	width ± 0,10	height ± 0,10	width ± 0,10	core	insulation	anvil
UL-STYLE 2464	0,35/4x	7 X 30	1,3	50	0,95	1,45	1,60	1,80	C-1.40-3.0-6-X	IS-1.80-2.5-6	<p><u>two piece anvil</u></p> <p>AC-1.40-2.75-A DPN 10803652</p> <p>AI-1.80-3.0-0.2 DPN 10769981</p>
									DPN 10713739	DPN 10713806	

UL-STYLE 2464 = SHEATH CABLE

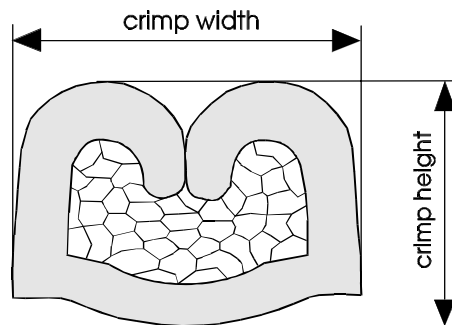

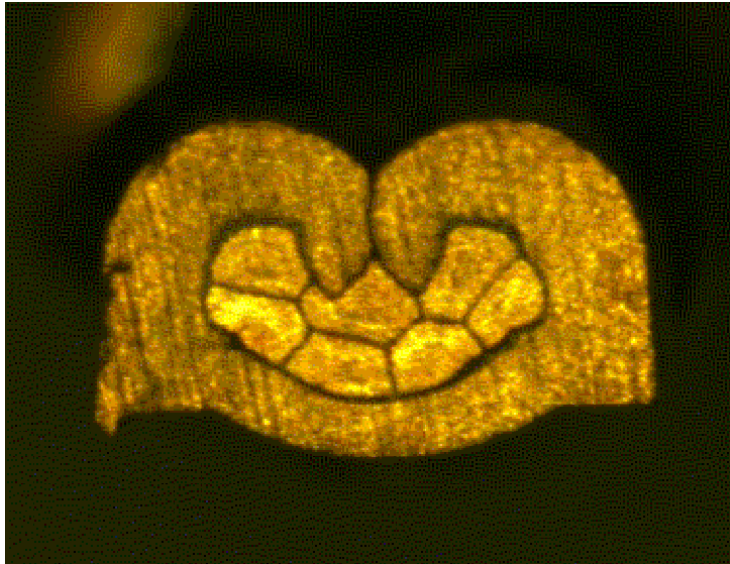

DELPHI PN 15440179

cable:
 $0,35 / 4 \times \text{mm}^2 = 7 \times 0,30 \text{ mm}$

crimping height:
0,95 mm

crimping width:
1,45 mm

tear-out force:
50 N