## AMP | AMP MCP 2.8, AMP MCP Connector System

TE Internal #: 5-968975-1

Housing for Female Terminals, Wire-to-Wire, 21 Position, .197 in [5 mm] Centerline, Other, Signal, Cable Mount (Free-Hanging), Hybrid

View on TE.com >



Connectors > Automotive Connectors > Connector Housings > AMP MCP, UNSEALED CONNECTOR HOUSING











Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 2.8 mm [.11 in]
Connector System: Wire-to-Wire

Number of Positions: 21

Centerline (Pitch): 5 mm [.197 in]

All AMP MCP, UNSEALED CONNECTOR HOUSING (187)

# **Features**

### **Product Type Features**

Product Type Features	
Connector & Housing Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	No
Hybrid Connector	No
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	21
Number of Rows	2, 3
Electrical Characteristics	
Operating Voltage	42 VDC

12 V, 24 V, 42 V

Nominal Voltage Architecture



Cable Exit Angle	180°
Body Material	PBT GF
Primary Product Color	Other
Connector Code	D
Contact Features	
Contact Size	2.8mm
Contact Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	5 mm[.197 in]
Dimensions	
Product Length	37.5 mm[1.476 in]
Product Height	24 mm[.945 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C, 140 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F][284 °F]
Operating Temperature Range	-40 – 140 °C[-40 – 284 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	300



Serviceable	No
Connector Position Assurance Capable	No

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts
















# Also in the Series | AMP MCP Connector System

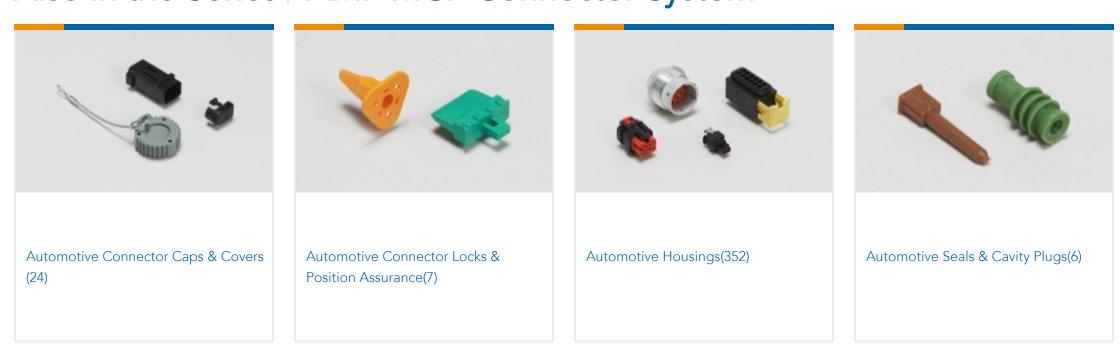





Automotive Terminals(125)



Insertion & Extraction Tools(13)



Other Automotive Connector Accessories(2)




PCB Headers & Receptacles(29)

# Customers Also Bought













# **Documents**

**Product Drawings** 

MCP2,8 GEH ASSY 21P

English

**CAD Files** 

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_5-968975-1\_F.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_5-968975-1\_F.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_5-968975-1\_F.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Housing for Female Terminals, Wire-to-Wire, 21 Position, .197 in [5 mm] Centerline, Other, Signal, Cable Mount (Free-Hanging), Hybrid



Product Specifications
Application Specification

English