



Coupling connectors

Sicma

6 way mini-sealed coupling housings for 1.5 + 2.8 mm terminals

Features

- 6 position housings mixed loading
- 3.33 mm pitch for
- Reduced size sealed housings
- Female part can be used as an aggregate housing
- Circumferencial interface seal on female housing
- Rear sealing ensured by a pre-mounted mat-seal
- Pre-assembled front grids support blade terminal guiding and mating
- Terminal position assurance (T.P.A.)
- CPA optional available
- Fretting free version available
- GO-NO-GO housing locking principle
- Mechanical polarization
- Several colour codings available



Performance characteristics

- Temperature range: from -40°C to +125°C
- Contact retention force: > 100 N for 1.5 mm terminals > 130 N for 2.8 mm terminals
- Contact insertion force: < 12 N for 1.5 mm terminals < 15 N for 2.8 mm terminals
- Connector mating force: < 60 N
- Sealing protection: IP 68
- Acceptable wire range: - 0.5 mm² to 2 mm² for 1.5 mm - 0.5 mm² to 4 mm² for 2.8 mm
- Housing locking strength: < 80 N

Construction

- Housing material: PBT
- Interface seal: Silicone
- Rear grommet seal: Silicone

Tooling

- T.P.A. removal tool: 210S040
- Terminal removal tool
 - Female terminal: 2115015
 - Male terminal: 2115016
- Cavity plug: 210A015019

Connector compatibility

- Usable terminals:
 - Sicma-2 1.5 mm female terminals
 - Sicma-2 1.5 mm male terminals
 - Sicma-2 2.8 mm female terminals
 - Sicma-2 2.8 mm male terminals
 - Sicma-3 1.5 mm female terminals
 - Sicma-3 1.5 mm male terminals
 - Sicma-3 2.8 mm female terminals
 - Sicma-3 2.8 mm male terminals

Part number	No. of position	Terminal size	Type	Colour	Full schroud
211 PC062S1049	6	1.5	Female	Brown	N
211 PC062S4049	6	1.5	Female	Yellow	N
211 PC062S5049	6	1.5	Female	Green	N
211 PL062S1049	6	1.5	Male	Brown	N
211 PL062S4049	6	1.5	Male	Yellow	N
211 PL062S5049	6	1.5	Male	Green	N





Coupling connectors

Sicma

6 way mini-sealed coupling housings for 1.5 + 2.8 mm terminals

Part number	No. of position	Terminal size	Type	Colour	Full shroud
211 PC069S0049	6	4x1.5+2x2.8	Female	Black	N
211 PC069S6049	6	4x1.5+2x2.8	Female	Blue	N
211 PC069S8049	6	4x1.5+2x2.8	Female	Grey	N
211 PL069S0049	6	4x1.5+2x2.8	Male	Black	N
211 PL069S6049	6	4x1.5+2x2.8	Male	Blue	N
211 PL069S8049	6	4x1.5+2x2.8	Male	Grey	N

Dimensional characteristics

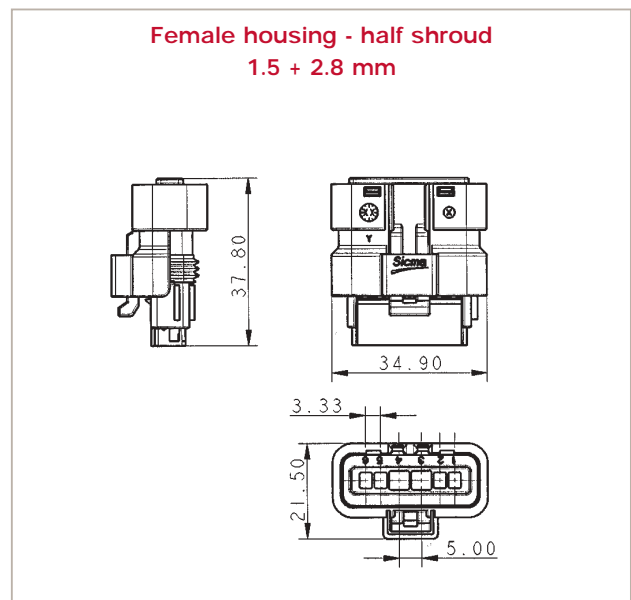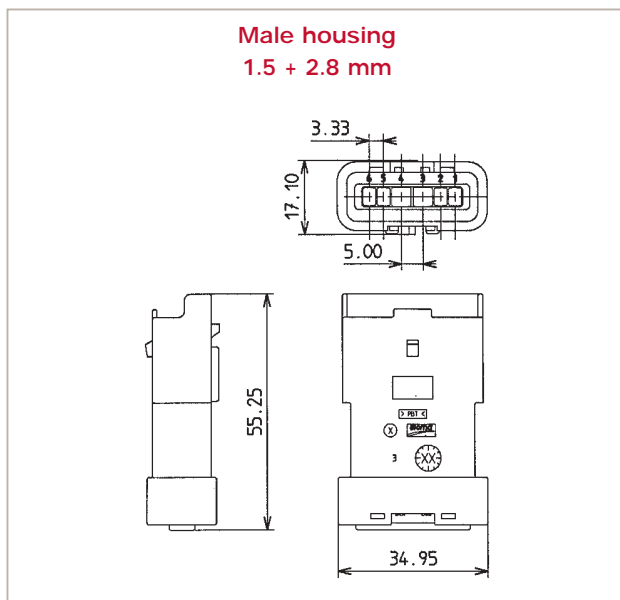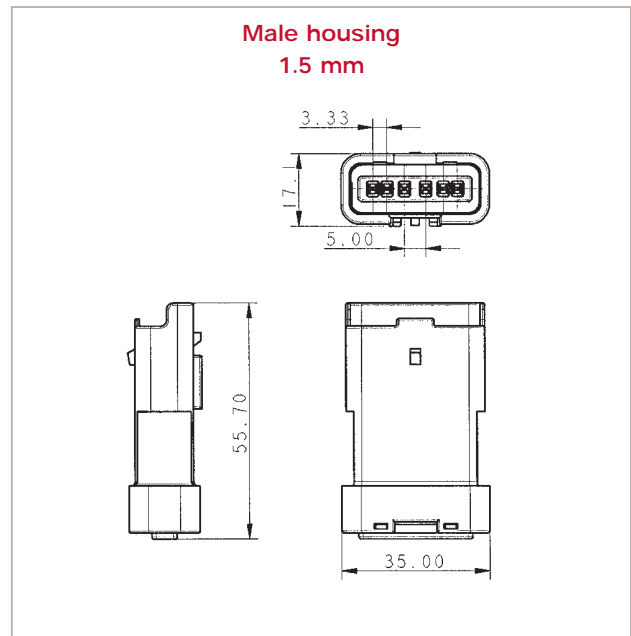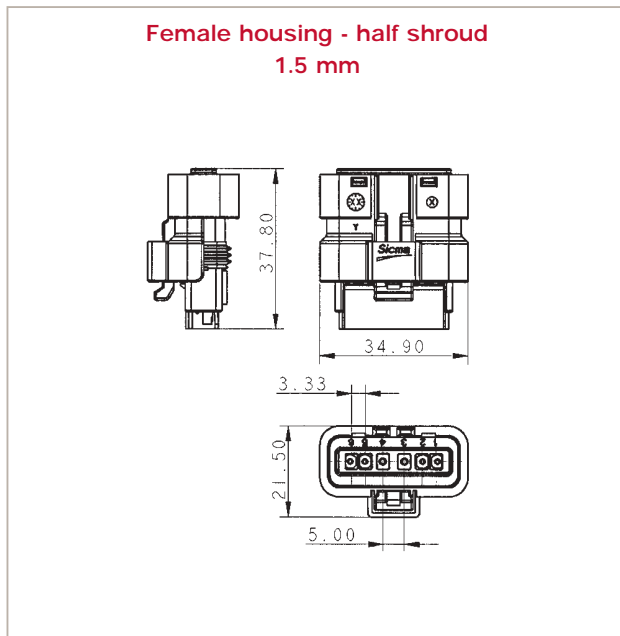

- Direct Links**
 - Cross Reference
 - RoHS/LF P/N search
 - Document & Drawing search
 - Application tooling
- Services**
 - Contact us
 - Distributor list
 - Pricing request
 - Order samples
- Literature**
 - Brochures & catalogs
 - Product documentation
 - Technical library

Start > Search=211PL062S1049* > **211PL062S1049**

211PL062S1049



211PL062S1049

6 way coupling Male housing

ACTIVE

[Customer Drawing](#)

Automotive division

[Assistant](#) [Add to Favorites](#)

[Email Datasheet](#) [Print Datasheet](#)

FCI Brings You More

- [Contact our sales/technical support](#)
- [Sample request](#)
- [Price request](#)

Mating Half

[211PC062S1049](#)

Specifications

General Mechanical Physical Terminal 1 Type Environmental Other Features

General

Application	Wire to Wire
Ways	6
Coding version	Brown
Product Type	Housing
Coding	Yes

Family	Wire to Wire
Features	<p>Circumferential interface seal Go-No-Go housing locking principle Pre-assembled front grids support blade terminal guiding and mating Acceptable wire size range from 0.5 to 2 mm² for 1.5 mm & 0.5 to 4 mm² for 2.8 mm Rear sealing ensured by a pre-mounted mat-seal Terminal position assurance (T.P.A.) and CPA option available Reduced size sealed housing - Sealing protection IP 72</p>
Hybrid	No
Main Terminal family	Sicma
Main Terminal size	1.5 mm
Sealed	Yes
Terminal Size	1.5
Mechanical	
Connector mating force	< 60N
Physical	
Color	Brown
Material	PBT
Temperature (Range)	-40°C to +125°C
Terminal 1 Type	
Terminal type 1	Sicma Male 1.5 mm Terminal
Ways for Terminal Type 1	6
Contact insertion force for Terminal Type 1	< 12N
Contact Pitch for Terminal Type 1	3.33 mm
Retention force (Contact) for Terminal Type 1	> 100N
Environmental	
IMDS	Yes
Other Features	
Type	Male
Disclaimer	<p>Displayed data is for information purposes only. For more information, please contact your local sales office. The supply of some products might be limited to some customers.</p>