DT06-3S-EP09 ACTIVE

DEUTSCH | DEUTSCH DT

TE Internal #: DT06-3S-EP09 Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT

View on TE.com >



Connectors > Automotive Connectors > Connector Housings > DEUTSCH DT Series Housings & Connectors



Connector & Housing Type: Housing for Female Terminals

Mating Pin Diameter: 1.59 mm [.063 in]

Connector System: Wire-to-Wire

Number of Positions: 3

Centerline (Pitch): 10.01 mm [.394 in]

All DEUTSCH DT Series Housings & Connectors (461)

Features

Product Type Features

Connector & Housing Shape

Connector & Housing Type

Triangular

Housing for Female Terminals

Connector System	Wire-to-Wire	
Sealable	Yes	
Hybrid Connector	No	
Primary Locking Feature	Integrated in Housing	
Connector & Contact Terminates To	Wire & Cable	
Configuration Features		
Blank Cavity Position	0	
Connector Modification	Enhanced Seal Retention, End Cap	
Number of Positions	3	
Electrical Characteristics		
Operating Voltage	250 VAC	
Nominal Voltage Architecture	12 V, 24 V, 48 V	
Body Features		
Cable Exit Angle	180°	
Body Material	PAGF	

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Primary Product Color	Black	
Contact Features		
Contact Size	Size 16	
Contact Type	Socket	
Mating Pin Diameter	1.59 mm[.063 in]	
Contact Current Rating (Max)	13 A	
Mechanical Attachment		
Mounting Feature	Without	
Terminal Position Assurance	Yes	
Strain Relief	Add By Accessory	
Mating Alignment Type	Polarized	
Mating Alignment	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Centerline (Pitch)	10.01 mm[.394 in]	
Dimensions		

Product Width

18.71 mm[.737 in]

Product Length	29.67 mm[1.168 in]	
Product Height	24.38 mm[.96 in]	
Accepts Wire Insulation Diameter Range	2.23 – 3.68 mm[.088 – .145 in]	
Usage Conditions		
Operating Temperature (Max)	125 °C[257 °F]	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]	
Operation/Application		
Circuit Application	Power & Signal	
Industry Standards		
Agency/Standard	SAE J2030	
Degree of Protection	IP68, IP6K9K	
UL Flammability Rating	12mm Flame Test per Standard UL-94	
Packaging Features		
Packaging Quantity	1100	

Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT




Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

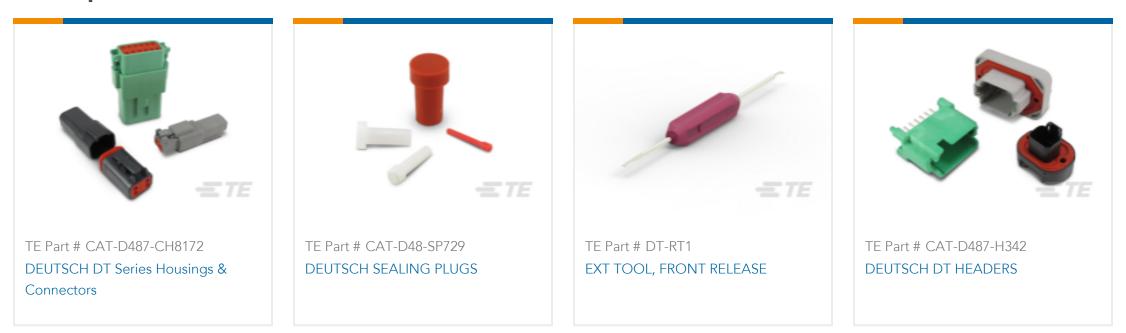

Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT








Also in the Series DEUTSCH DT



Automotive	Connector	Caps a	COVCIS	
(98)				

Position Assurance(73)

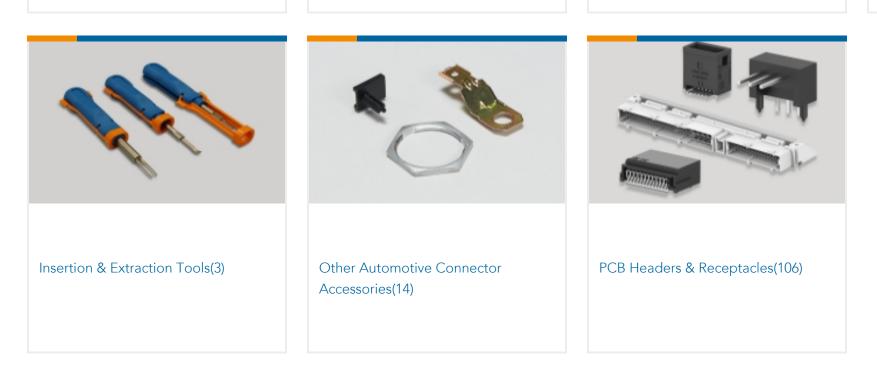

Customers Also Bought



Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT





Documents

Product Drawings PLG, 3P, BLK, N, SL RET, LTCH PROT CAP

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_DT06-3S-EP09_99_c-dt06-3s-ep09-99.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DT06-3S-EP09_99_c-dt06-3s-ep09-99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DT06-3S-EP09_99_c-dt06-3s-ep09-99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages DEUTSCH DT Enhanced Seal Retention Connectors

English

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications Application Specification

English

Product Environmental Compliance TE Material Declaration

English

Agency Approvals UL Report

Housing for Female Terminals, Wire-to-Wire, 3 Position, .394 in [10.01 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



English