


### AMP | MQS

TE Internal #: 953698-1 Housing for Male Terminals, Wire-to-Wire, 3 Position, .1 in [2.54 mm] Centerline, Black, Signal, Cable Mount (Free-Hanging), MQS View on TE.com >



Connectors > Automotive Connectors > Connector Housings > MQS, CONNECTOR HOUSING



Connector & Housing Type: Housing for Male Terminals

Mating Tab Width: .63 mm [ .025 in ]

Connector System: Wire-to-Wire

Number of Positions: 3

Centerline (Pitch): 2.54 mm [.1 in]

### All MQS, CONNECTOR HOUSING (557)

## Features

## Product Type Features

Connector & Housing Shape

Connector & Housing Type

 Rectangular

Housing for Male Terminals

Connector System	Wire-to-Wire
Sealable	No
Hybrid Connector	No
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	3
Number of Rows	1
Electrical Characteristics	
Operating Voltage	24 VDC
Nominal Voltage Architecture	12 V, 24 V
Body Features	
Cable Exit Angle	180°
Body Material	PBT GF
Primary Product Color	Black
Contact Features	

Housing for Male Terminals, Wire-to-Wire, 3 Position, .1 in [2.54 mm] Centerline, Black, Signal, Cable Mount (Free-Hanging), MQS



Contact Size	.63mm
Contact Type	Tab
Mating Tab Width	.63 mm[.025 in]
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Product Width	13.9 mm[.547 in]
Product Length	13.9 mm[.547 in]
Product Height	33.7 mm[1.327 in]

# Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C[158 °F][167 °F] [176 °F][185 °F]
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

# Product Compliance

For compliance documentation, visit the product page on TE.com>

Housing for Male Terminals, Wire-to-Wire, 3 Position, .1 in [2.54 mm] Centerline, Black, Signal, Cable Mount (Free-Hanging), MQS



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**

TE Part # 953697-1 3POS MQS REC

Also in the Series | MQS

Housing for Male Terminals, Wire-to-Wire, 3 Position, .1 in [2.54 mm] Centerline, Black, Signal, Cable Mount (Free-Hanging), MQS



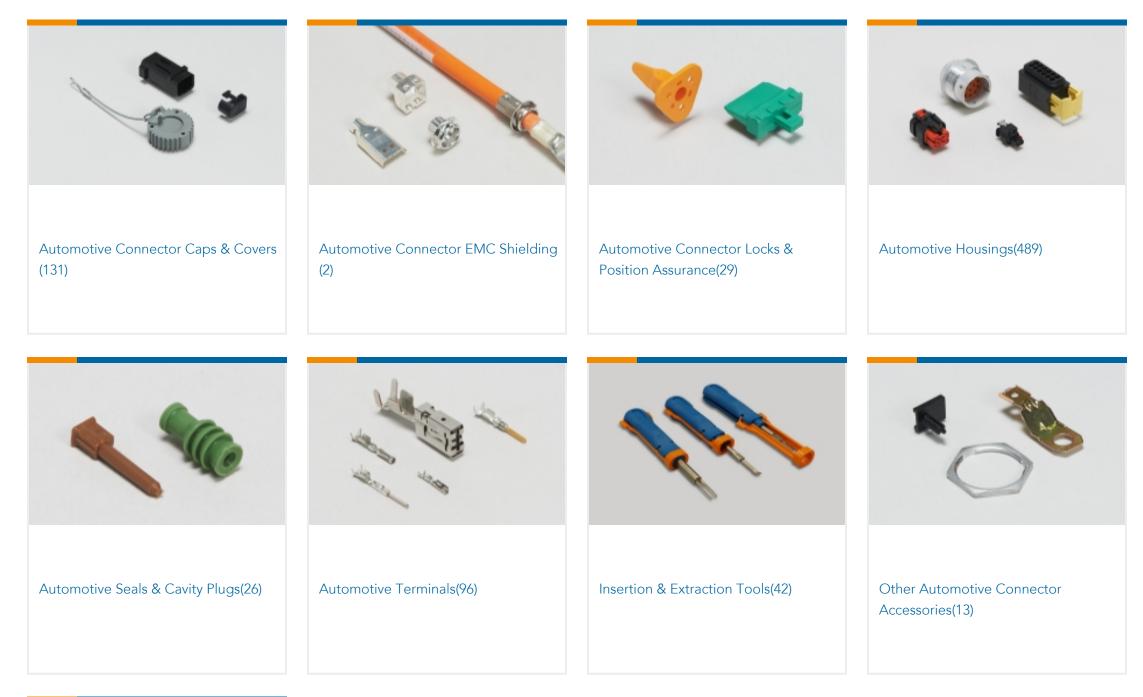



PCB Headers & Receptacles(206)

# Customers Also Bought



# Documents

Housing for Male Terminals, Wire-to-Wire, 3 Position, .1 in [2.54 mm] Centerline, Black, Signal, Cable Mount (Free-Hanging), MQS



**Product Drawings 3POS MQS TAB** English **CAD** Files 3D PDF 3D **Customer View Model** ENG\_CVM\_CVM\_953698-1\_E\_c-953698-1-e.2d\_dxf.zip English Customer View Model ENG\_CVM\_CVM\_953698-1\_E\_c-953698-1-e.3d\_igs.zip English **Customer View Model** ENG\_CVM\_CVM\_953698-1\_E\_c-953698-1-e.3d\_stp.zip English By downloading the CAD file I accept and agree to the **Terms and Conditions** of use Datasheets & Catalog Pages Micro Quadlok Interconnection System (MQS) English

Product Specifications Process Specification

English

# Product Environmental Compliance

**Product Compliance** 

English

**Product Compliance** 

English

Instruction Sheets Instruction Sheet (non U.S.)

English