
936139-1 ~ ACTIVE

Junior Power Timer TE Internal #: 936139-1 Housing for Female Terminals, Wire-to-Wire, 2 Position, .196 in [5 mm] Centerline, Sealable, Gray, Signal, Junior Power Timer View on TE.com >



Connectors > Automotive Connectors > Connector Housings > TIMER, CONNECTOR HOUSING



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 2.8 mm [.11 in]

Connector System: Wire-to-Wire

Number of Positions: 2

Centerline (Pitch): 5 mm [.196 in]

All TIMER, CONNECTOR HOUSING (543)

Features

Product Type Features

Connector & Housing Shape

Connector & Housing Type

Rectangular

Housing for Female Terminals

Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Configuration Features	
Number of Positions	2
Number of Rows	1
Body Features	
Cable Exit Angle	180°
Body Material	PBT
Primary Product Color	Gray
Contact Features	
Contact Size	2.8mm
Contact Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]

Housing for Female Terminals, Wire-to-Wire, 2 Position, .196 in [5 mm] Centerline, Sealable, Gray, Signal, Junior Power Timer



Mechanical Attachment

Mounting Feature	Without
Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Polarization Slot
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	5 mm[.196 in]
Dimensions	
Product Width	32.5 mm[1.27 in]
Product Length	22 mm[.866 in]
Product Height	19.3 mm[.759 in]
Operation/Application	
Circuit Application	Signal
Packaging Features	

Packaging Method

Bag

Other

Serviceable	No
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.

Housing for Female Terminals, Wire-to-Wire, 2 Position, .196 in [5 mm] Centerline, Sealable, Gray, Signal, Junior Power Timer




Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

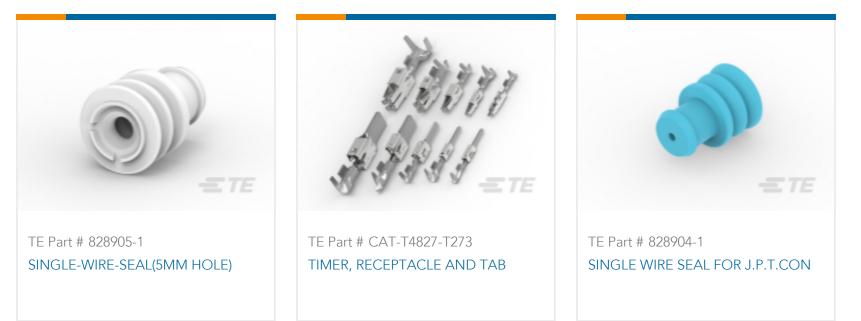

Also in the Series | Junior Power Timer

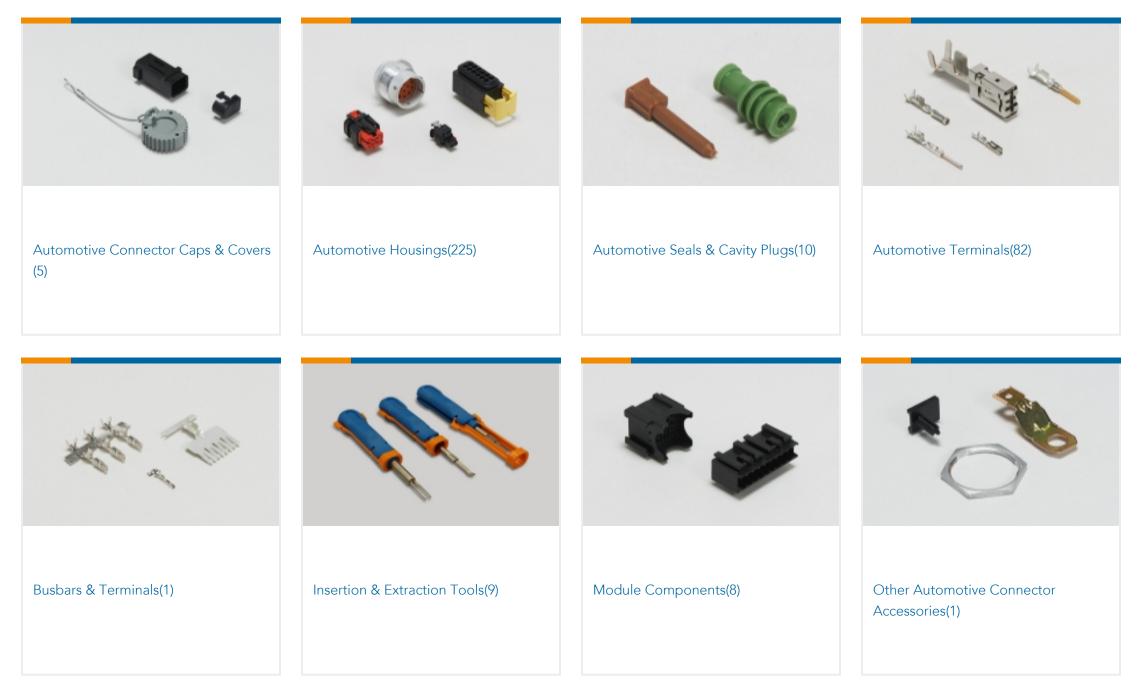


Housing for Female Terminals, Wire-to-Wire, 2 Position, .196 in [5 mm] Centerline, Sealable, Gray, Signal, Junior Power Timer





Customers Also Bought

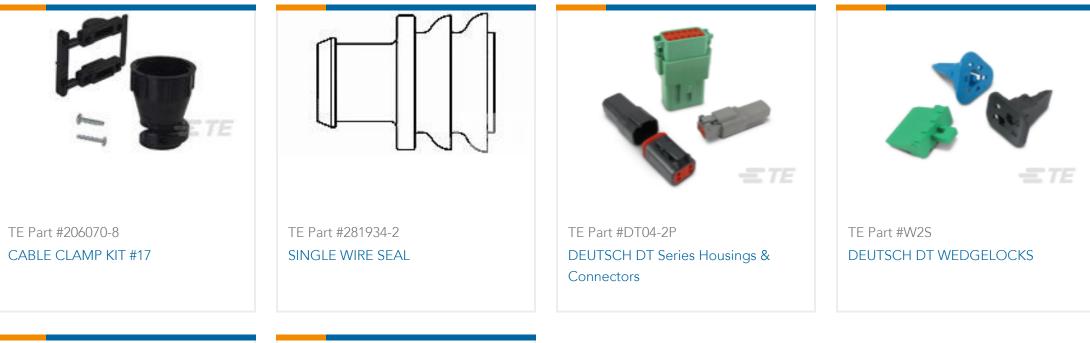



DEUTSCH SOLID CONTACTS

AMP SUPERSEAL 1.5MM, CONNECTOR HOUSING

Documents

Product Drawings JPT INJECTOR PLUG 2P ASSY

English

CAD Files

Customer View Model ENG_CVM_CVM_936139-1_O.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_936139-1_O.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_936139-1_O.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 2 Position, .196 in [5 mm] Centerline, Sealable, Gray, Signal, Junior Power Timer



Datasheets & Catalog Pages Timer Interconnection System

English

Product Specifications Product Specification

English