8-968973-2 - ACTIVE

AMP | AMP MCP 2.8, AMP MCP Connector System

TE Internal #: 8-968973-2 Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Gray, Signal, Cable Mount (Free-Hanging), Hybrid View on TE.com >



Connectors > Automotive Connectors > Connector Housings > AMP MCP, UNSEALED CONNECTOR HOUSING



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 2.8 mm [.11 in]

Connector System: Wire-to-Wire

Number of Positions: 15

Centerline (Pitch): 5 mm [.197 in]

All AMP MCP, UNSEALED CONNECTOR HOUSING (187)

Features

Product Type Features

Connector & Housing Shape

Connector & Housing Type

Rectangular

Housing for Female Terminals

Connector System	Wire-to-Wire
Sealable	No
Hybrid Connector	No
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	15
Number of Rows	3
Electrical Characteristics	
Operating Voltage	28 VDC
Nominal Voltage Architecture	12 V, 24 V
Body Features	
Cable Exit Angle	180°
Body Material	PBT GF
Primary Product Color	Gray
Connector Code	A

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Gray, Signal, Cable Mount (Free-Hanging), Hybrid



Contact Features

Contact Size	2.8mm
Contact Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	5 mm[.197 in]
Dimensions	
Product Width	31 mm[1.22 in]
Product Length	31 mm[1.22 in]
Product Height	24 mm[.945 in]
Row-to-Row Spacing	5.5 mm[.217 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]
Operating Temperature Range	-40 - 120 °C[-40 - 248 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	
Packaging Quantity	1200
Packaging Method	Carton
Other	
Serviceable	No
Connector Position Assurance Capable	No

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Gray, Signal, Cable Mount (Free-Hanging), Hybrid



Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

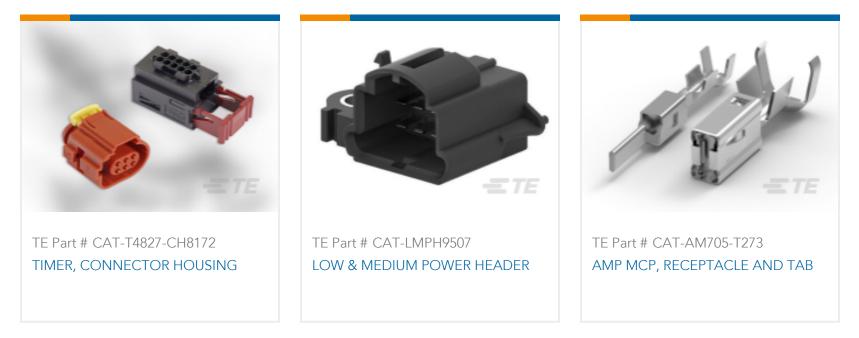

Also in the Series AMP MCP 2.8

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Gray, Signal, Cable Mount (Free-Hanging), Hybrid



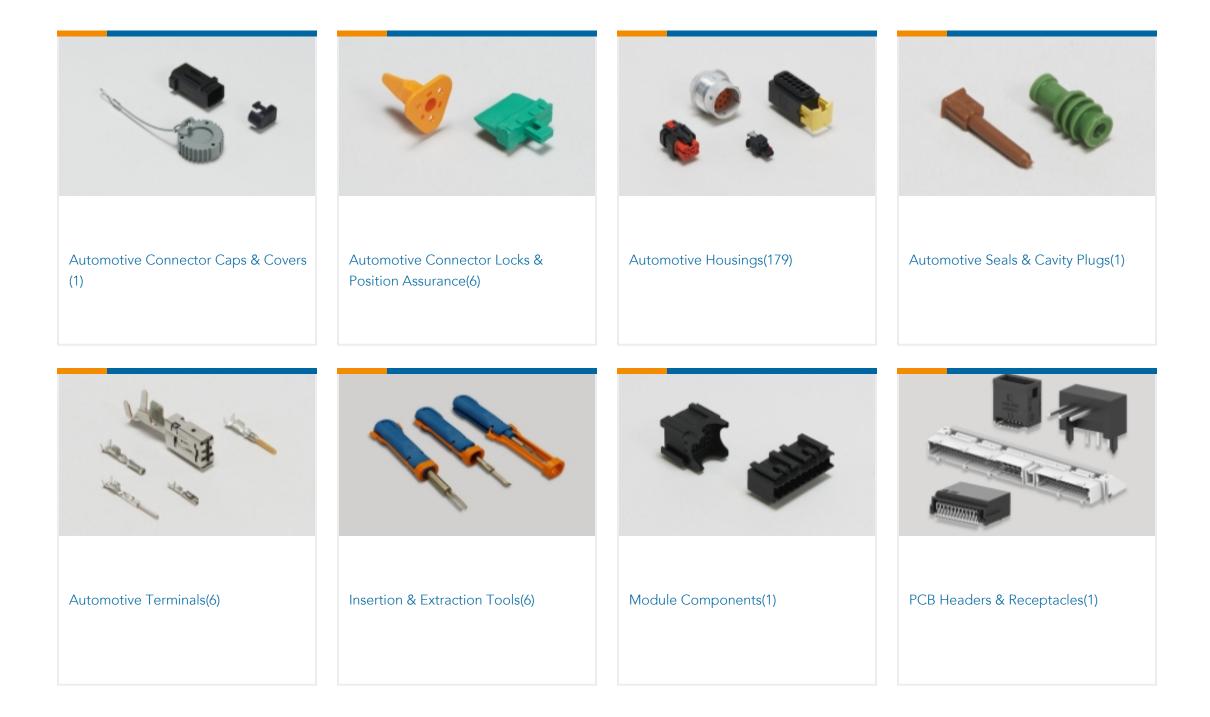

Also in the Series AMP MCP Connector System




Automotive Connector Caps & Covers (24)	Automotive Connector Locks & Position Assurance(7)	Automotive Housings(352)	Automotive Seals & Cavity Plugs(6)
And a			
Automotive Terminals(125)	Insertion & Extraction Tools(13)	Other Automotive Connector Accessories(2)	PCB Headers & Receptacles(29)

Customers Also Bought

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Gray, Signal, Cable Mount (Free-Hanging), Hybrid



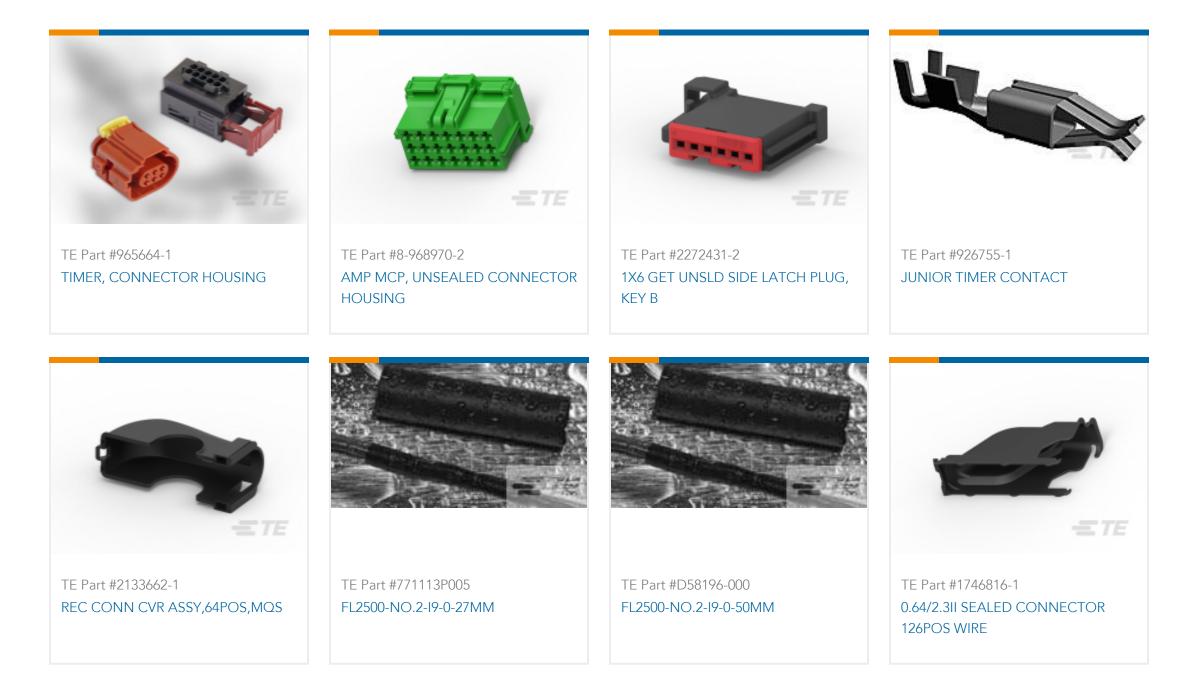

Documents

Product Drawings MCP2.8 GEH ASSY 15P English

MCP2.8 GEH ASSY 15P

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_8-968973-2_F.2d_dxf.zip

English

Customer View Model ENG_CVM_CVM_8-968973-2_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_8-968973-2_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Product Environmental Compliance MD_8-968973-2_10172017041_dmtec

English

Housing for Female Terminals, Wire-to-Wire, 15 Position, .197 in [5 mm] Centerline, Gray, Signal, Cable Mount (Free-Hanging), Hybrid



MD_8-968973-2_10172017041_dmtec

English