


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0350220002](#)  
**Status:** **Active**  
**Overview:** [Board-in Connectors](#)  
**Description:** 2.50mm Pitch, Board-In Crimp Housing, Single Row, Right-Angle and Vertical, 2 Circuits, Natural

**Documents:**

|  |  |
|--|--|
| <a href="#">3D Model</a>                                     | <a href="#">Product Specification PS-35022-003-001 (PDF)</a>   |
| <a href="#">Drawing (PDF)</a>                                | <a href="#">Packaging Specification PK-35022-001-001 (PDF)</a> |
| <a href="#">3D Model (PDF)</a>                               | <a href="#">RoHS Certificate of Compliance (PDF)</a>           |
| <a href="#">Product Specification PS-35021-001-001 (PDF)</a> |  |

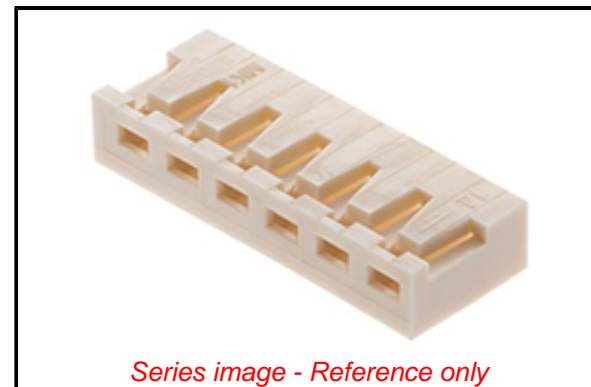

**Agency Certification**

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**

|                |                                     |
|----------------|-------------------------------------|
| Product Family | Crimp Housings                      |
| Series         | <a href="#">35022</a>               |
| Application    | Signal                              |
| Overview       | <a href="#">Board-in Connectors</a> |
| Product Name   | Board-in                            |
| UPC            | 800753644458                        |

**Physical**

|                               |                |
|-------------------------------|----------------|
| Circuits (maximum)            | 2              |
| Color - Resin                 | Natural        |
| Flammability                  | 94V-0          |
| Gender                        | N/A            |
| Glow-Wire Capable             | No             |
| Lock to Mating Part           | None           |
| Material - Resin              | Nylon          |
| Net Weight                    | 0.060/g        |
| Number of Rows                | 1              |
| Packaging Type                | Bag            |
| Panel Mount                   | No             |
| Pitch - Mating Interface      | 2.50mm         |
| Stackable                     | No             |
| Temperature Range - Operating | -40° to +105°C |

**Solder Process Data**

|                             |     |
|-----------------------------|-----|
| Lead-freeProcess Capability | N/A |
|-----------------------------|-----|

**Material Info**

**Reference - Drawing Numbers**

|                         |                                    |
|-------------------------|------------------------------------|
| Packaging Specification | PK-35022-001-001                   |
| Product Specification   | PS-35021-001-001, PS-35022-003-001 |
| Sales Drawing           | SD-35022-00XX-001                  |

**EU ELV**

**Compliant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2022)4187-DC (10  
June 2022)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Compliant

Not Contained

**Search Parts in this Series**

[35022](#) Series

**Use With**

Straight Terminal [350449105](#) <br>Right  
Angle Terminal [350211001](#) , [350211160](#)