Molex.com

English
日本語
한국어
简体中文

Product Name
Cross-Ref
Catalog
Literature
Industries
Standards
Contact Us
About Us
Investors
Careers

Search site:Search: Enter Part No. or K Go

Connectors   Sockets   I/O Connectors   Cable Assemblies   Fiber Optics   Printed Circuit Products   Industrial Products   Lighting Products

Switch Language

English

Need Assistance?
Contact Us
Find a Distributor
Order Samples
Tech Library
Ecocare
Electrical Models

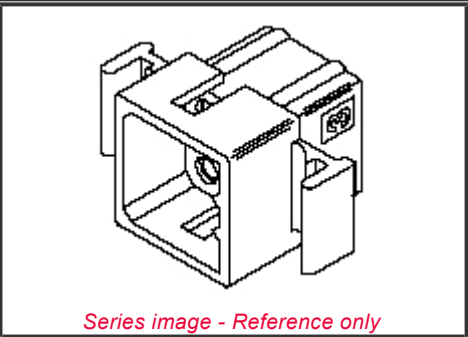**Printer-friendly page**

Email this page

Home
Crimp Housings
Datasheet

Part Number:
0003062091

Status:
Active

Overview:
Standard .062"

Description:
1.57mm (.062") Diameter Standard .062 Pin and Socket Plug Housing, 9 Circuits, With Standard Mounting Ears

Documents: *Note - Please disable browser pop-up blockers for documents on www.molex.com*

Drawing (PDF)   Product Specification PS-02-06 (PDF)   3D Model

Series image - Reference only

EU RoHS
ELV and RoHS Compliant

China RoHS

REACH SVHC
Contains SVHC: No

Halogen-Free Status
Not Reviewed

Need more information on product environmental compliance?

Email **productcompliance@molex.com**

For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series

1625 Series

Mates With

1625 Receptacle

Use With

Female Crimp Terminals
1561 Link:4559, 4529, 2190, 2189, 1787, 1855
Male Crimp Terminals 1560, 1786, 1854
1778 Male PC Tail Terminals
1779 Female PC Tail Terminals

Order Products:

Part Detail: (show all)

General Physical Electrical Agency Certification Material Info Reference - Drawing Numbers

General

Product Family	Crimp Housings
Series	1625
Comments	Glow Wire Equivalent Part Number 50362279
	Polarized to Mating Part
Overview	Standard .062"
Product Name	Standard .062"

Physical

Breakaway	No
Circuits (maximum)	9
Circuits Detail	3x3
Color - Resin	Natural
Flammability	94V-2
Gender	Plug
Glow-Wire Compliant	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Resin	Nylon
Number of Rows	3
Packaging Type	Bag
Panel Mount	Yes
Pitch - Mating Interface (in)	0.145 In
Pitch - Mating Interface (mm)	3.68 mm
Pitch - Term. Interface (in)	0.145 In
Pitch - Term. Interface (mm)	3.96 mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40°C to +105°C

Electrical(Please review the Product Specification for specific details.)

Current - Maximum per Contact	5A

Agency Certification

CSA	LR19980
TUV	R72081037
UL	E29179

Material Info

Old Part Number	1625-9P

Reference - Drawing Numbers

Product Specification	PS-02-06
Sales Drawing	SD-1625-9*