



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Board**

Number of Positions: **3**

Centerline (Pitch): **3.96 mm [.156 in]**

Features

Product Type Features

Header Type	Partially Shrouded
Rectangular Power Connector Type	Header
Connector & Housing Type	Plug
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	3
PCB Mount Orientation	Vertical
Number of Power Positions	3
Number of Rows	1

Electrical Characteristics

Operating Voltage	250 VDC
-------------------	---------

Body Features



Connector Profile	Low
-------------------	-----

Contact Features

Contact Layout	Inline
Contact Base Material	Brass
Contact Current Rating (Max)	8 A
Contact Retention Within Housing	Without
Contact Type	Pin
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	1 µm[39.37 µin]
Contact Termination Area Plating Thickness	.8 µm[31.49 – 70.86 µin]

Termination Features

Termination Post & Tail Length	3.7 mm[.146 in]
Termination Method to Printed Circuit Board	Through Hole - Solder

Mechanical Attachment

Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	Without
Connector Mounting Type	Board Mount
Mating Retention	With
Mating Retention Type	Latch

Housing Features

Centerline (Pitch)	3.96 mm[.156 in]
Housing Color	Natural
Housing Material	PBT GF

Dimensions

PCB Thickness (Recommended)	.06 mm[1.6 in]
Width	10.7 mm[.421 in]
Mating Post Length	7.7 mm[.3 in]
Height	8.2 mm[.32 in]
Length	11.82 mm[.465 in]

Usage Conditions



Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Method	Tube
Packaging Quantity	40

Other

For Use With	Plug Housing
--------------	--------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

TE Part # 1-1123722-2
3.96 EP PLUG HSG 2P(NATURAL)

TE Part # 1744416-3
3 POS EP II HSG, GLOW WIRE

TE Part # 3-1123722-2
3.96 EP PLUG HSG 2P(BLUE)

TE Part # 1744493-3
03P EP-II HOUSING, ORANGE

TE Part # 2-1123722-2
3.96 EP PLUG HSG 2P(YELLOW)

TE Part # 4-1123722-2
3.96 EP PLUG HSG 2P(RED)

TE Part # 5-1123722-2
3.96 EP PLUG HSG 2P(BLACK)

TE Part # 6-1123722-2
3.96 EP PLUG HSG 2P(GREEN)

TE Part # 7-1123724-2
03P EP HDR HSG V0 GWT NO 02P

Also in the Series | Economy Power

Connector Contacts(1)

Insertion & Extraction Tools(1)

PCB Headers & Receptacles(166)


PCB Latches, Locks & Retainers(2)

Power Contacts(8)

Rectangular Connector Housings(1)

Rectangular Power Connectors(285)

Wire-to-Board Connector Assemblies & Housings(64)

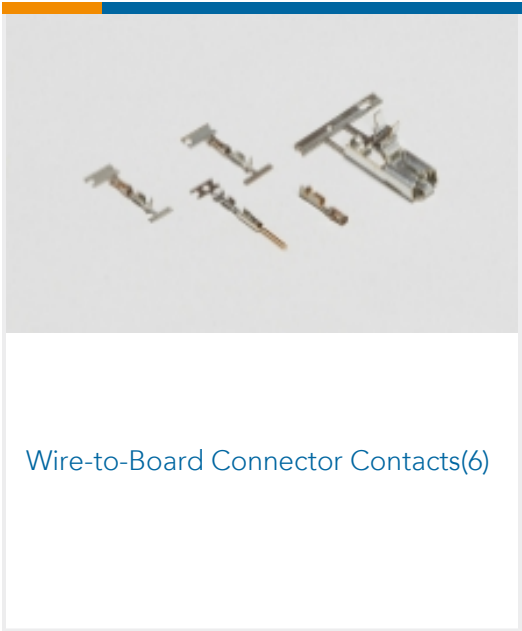

Customers Also Bought

TE Part #2-2176058-1
RLP73N 3A R068 5% 2K RL

TE Part #6648434-1
CONTACT,SKT,SIZE 1/4 (712-81-01107)

TE Part #86479-3
10 MODII HDR DRRA UNSHRD .100

TE Part #1437259-6
3100089=SHIELD FINGER

TE Part #1766811-1
CONTACT,PIN,#0

TE Part #6648405-1
CONTACT,SKT,SIZE #0

TE Part #1877285-4
04P EP SHRD HDR ASMY, WHITE

TE Part #1766232-1
CONTACT,PIN, .25 DIA

TE Part #5103311-8
A/L LOW PRO HDR 40P RA BLACK

TE Part #2-1977223-8
FSM14JSMAS=6MM TACT SWITCH,
SMT 160gf

Documents

Product Drawings
3.96EP HDR ASSY 2(3)P NAT/TUBE
English
3.96EP HDR ASSY 2(3)P NAT/TUBE
English

CAD Files
Customer View Model
ENG_CVM_1-1318301-2_D.3d_igs.zip



English

Customer View Model

[ENG_CVM_1-1318301-2_D.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_1-1318301-2_D.2d_dxf.zip](#)

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[1-1773885-9 Economy Power Connectors](#)

English

Product Specifications

[Application Specification](#)

English

Product Environmental Compliance

[MD_1-1318301-2_04232018021_dmtec](#)

English

[MD_1-1318301-2_04232018021_dmtec](#)

English

Instruction Sheets

[Instruction Sheet \(non U.S.\)](#)

Japanese

[Economy Power \(EP\) Connector](#)

Japanese

Agency Approvals

[VDE Certificate](#)

English