
1-178802-3 - ACTIVE

Dynamic Series | Dynamic 3000 Series

TE Internal #: 1-178802-3 Housing, Housing for Male Terminals, Wire-to-Wire, 3 Position, 3.81 mm [.15 in] Centerline, Crimp, 1 Row, Black, Mating Retention, Dynamic 3000 Series

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >

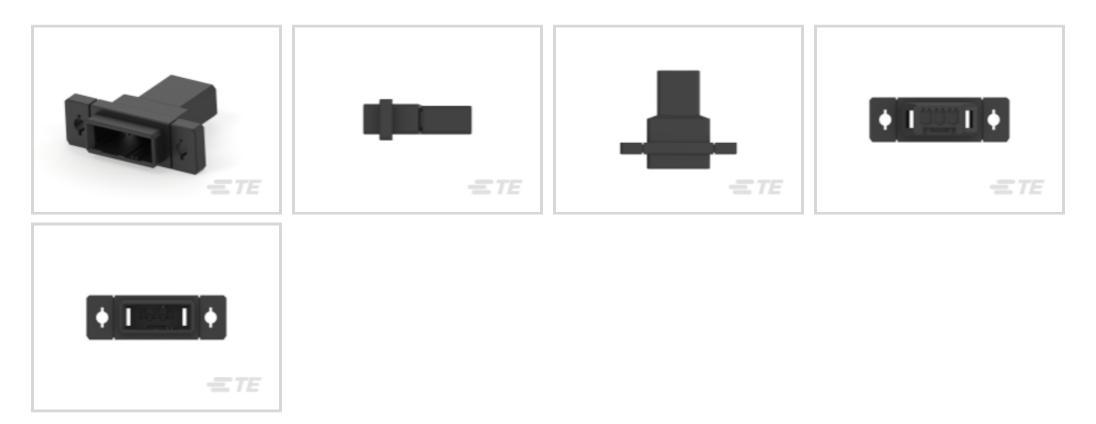

Receptacle and Tab Housing: 3.81 mm pitch, 250V

Connector Product Type: Housing

Connector & Housing Type: Housing for Male Terminals

Connector System: Wire-to-Wire

Number of Positions: 3

Centerline (Pitch): 3.81 mm [.15 in]

All Receptacle and Tab Housing: 3.81 mm pitch, 250V (45)



Features

Product Type Features

Connector Product Type	Housing				
Connector & Housing Type	Housing for Male Terminals				
Connector System	Wire-to-Wire				
Sealable	No				
Connector & Contact Terminates To	Wire & Cable				
Configuration Features					
Number of Positions	3				
Number of Rows	1				
Termination Features					
Termination Method to Wire & Cable	Crimp				
Mechanical Attachment					

C For support call+1 800 522 6752

07/11/2022 06:49AM | Page 1

Housing, Housing for Male Terminals, Wire-to-Wire, 3 Position, 3.81 mm [.15 in] Centerline, Crimp, 1 Row, Black, Mating Retention, Dynamic 3000 Series



Mating Retention	With			
Connector Mounting Type	Panel Mount			
Housing Features				
Centerline (Pitch)	3.81 mm[.15 in]			
Housing Color	Black			
Usage Conditions				
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]			
Operation/Application				
Circuit Application	Power & Signal			
Product Compliance For compliance documentation, visit the product page on TE.com>				
EU RoHS Directive 2011/65/EU	Compliant			
EU ELV Directive 2000/53/EC	Compliant			
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022			

(223)

Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


Halogen Content

Solder Process Capability

Housing, Housing for Male Terminals, Wire-to-Wire, 3 Position, 3.81 mm [.15 in] Centerline, Crimp, 1 Row, Black, Mating Retention, Dynamic 3000 Series








Also in the Series | Dynamic 3000 Series



Connector Contacts(3)	Insertion & Extraction Tools(1)	PCB Connector Keying(1)	PCB Connector Mounting(8)
PCB Headers & Receptacles(283)	PCB Terminal Blocks(25)	Standard Rectangular Connectors(2)	Wire-to-Board Connector Assemblies & Housings(152)



Customers Also Bought

C For support call+1 800 522 6752

Housing, Housing for Male Terminals, Wire-to-Wire, 3 Position, 3.81 mm [.15 in] Centerline, Crimp, 1 Row, Black, Mating Retention, Dynamic 3000 Series





Documents

Product Drawings DYNAMICD3100S TAB HSG 3P PM X-K

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-178802-3_GN_c-1-178802-3-gn.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-178802-3_GN_c-1-178802-3-gn.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-178802-3_GN_c-1-178802-3-gn.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages 1-1773721-5_DYNAMIC_SERIES_QRG

English

1-1773732-4_DYNAMIC_SERIES_CATALOG_ENGLISH

Japanese

1-1773732-4_DYNAMIC_SERIES_CATALOG_ENGLISH

English

Product Specifications Product Specification

English

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals **TUV Certificate**

Housing, Housing for Male Terminals, Wire-to-Wire, 3 Position, 3.81 mm [.15 in] Centerline, Crimp, 1 Row, Black, Mating Retention, Dynamic 3000 Series



English