
1-2199230-6 - ACTIVE

#### M.2 NGFF

TE Internal #: 1-2199230-6 M.2 Connectors, Height 4.2 mm [.165 in], Keying Code M, Gold, Board-to-Board, 67 Position, .02 in [.5 mm] Centerline, Printed Circuit Board, M.2 NGFF

#### View on TE.com >

Connectors > PCB Connectors > Card Edge Connectors > M.2 Connectors > M.2 CONNECTORS

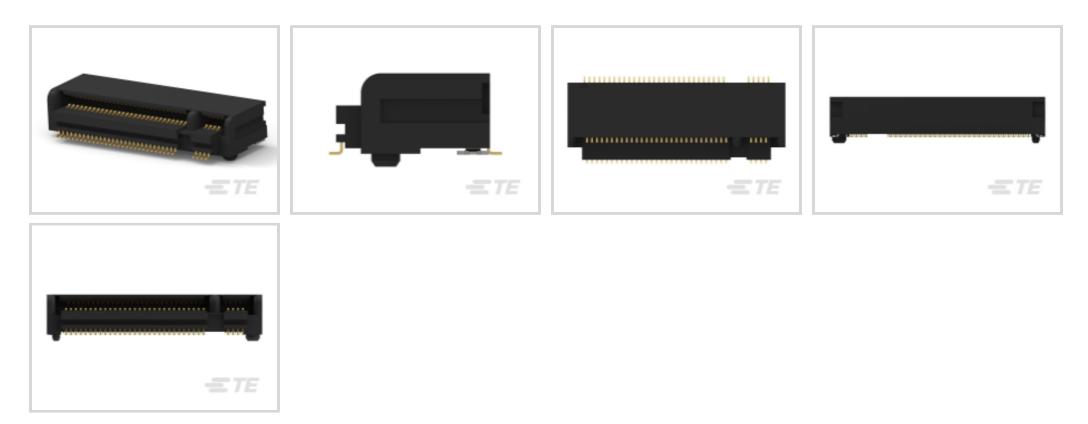

Connector Height: 4.2 mm [.165 in ]

Keying Code: M

Contact Mating Area Plating Material: Gold

Connector System: Board-to-Board

Number of Positions: 67

#### All M.2 CONNECTORS (29)



## Features

#### **Product Type Features**

Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Rows	2
PCB Mount Orientation	Right Angle
Keying Code	M
Number of Positions	67
Electrical Characteristics	
Operating Voltage	50 VAC
Contact Features	
	30 µin

M.2 Connectors, Height 4.2 mm [.165 in], Keying Code M, Gold, Board-to-Board, 67 Position, .02 in [.5 mm] Centerline, Printed Circuit Board, M.2 NGFF



PCB Contact Termination Area Plating Material Finish	Matte
PCB Contact Termination Area Plating Material	Gold Flash, Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold
Contact Current Rating (Max)	.5 A
Termination Features	
Termination Method to Printed Circuit Board	Surface Mount
Mechanical Attachment	
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	High Temperature Thermoplastic
Housing Color	Black
Centerline (Pitch)	.5 mm[.02 in]
Dimensions	
Connector Length	21.9 mm[.862 in]
Connector Width	8.7 mm[.343 in]
Connector Height	4.2 mm[.165 in]

## Usage Conditions

Operating Temperature Range	-40 - 80 °C[-40 - 176 °F]
Operation/Application	
Circuit Application	Power
Packaging Features	
Packaging Method	Tape & Reel
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Compliant Compliant

M.2 Connectors, Height 4.2 mm [.165 in], Keying Code M, Gold, Board-to-Board, 67 Position, .02 in [.5 mm] Centerline, Printed Circuit Board, M.2 NGFF



Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Reflow solder capable to 260°C

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



TE Part # 1-2199119-6 M.2 0.5PITCH 3.2H KEY M 30U'' AU

# Also in the Series | M.2 NGFF


M.2 Connectors(32)	

**Customers Also Bought** 

**C** For support call+1 800 522 6752

M.2 Connectors, Height 4.2 mm [.165 in], Keying Code M, Gold, Board-to-Board, 67 Position, .02 in [.5 mm] Centerline, Printed Circuit Board, M.2 NGFF



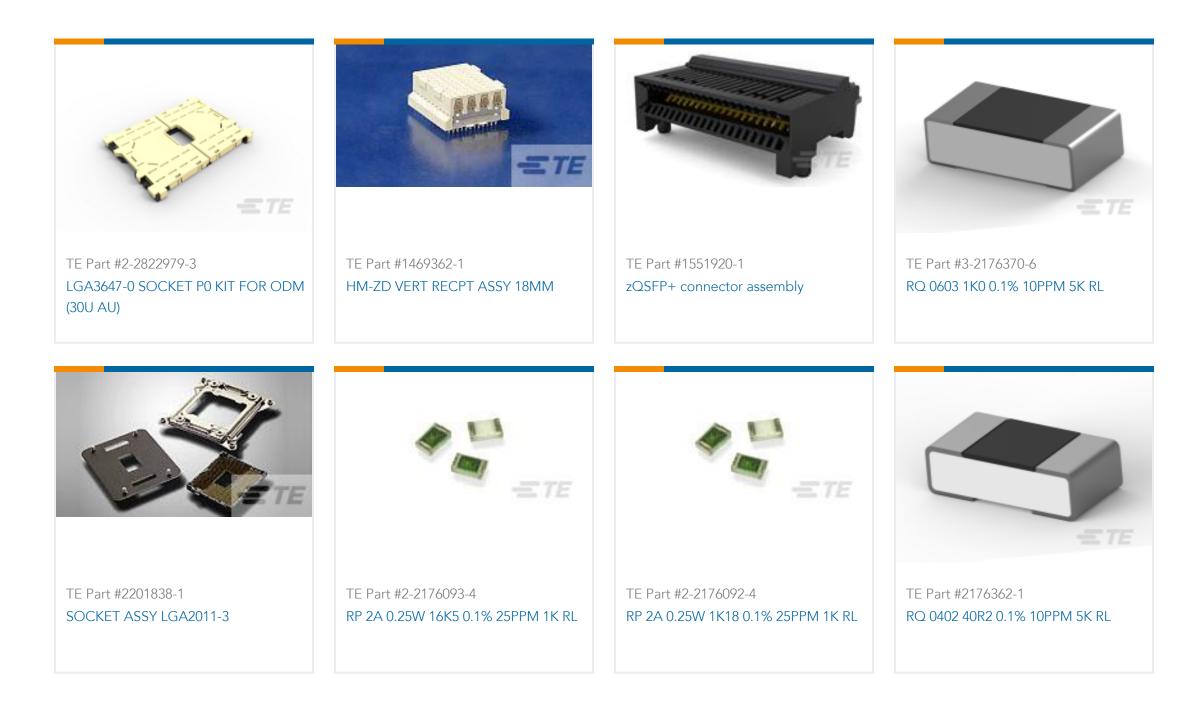

### Documents

Product Drawings M.2 0.5PITCH 4.2H KEY M 30U AU

English

CAD Files 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_1-2199230-6\_B3.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-2199230-6\_B3.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-2199230-6\_B3.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 1-1773702-1\_NGFF\_QRG-EN

English

Product Specifications Application Specification

English

Product Environmental Compliance MD\_1-2199230-6\_080720181416\_dmtec

M.2 Connectors, Height 4.2 mm [.165 in], Keying Code M, Gold, Board-to-Board, 67 Position, .02 in [.5 mm] Centerline, Printed Circuit Board, M.2 NGFF



English

MD\_1-2199230-6\_080720181416\_dmtec

English