


Multilock Connector System

TE Internal #: 1-1743086-3 Housing for Male Terminals, Wire-to-Wire, 39 Position, .098 in / .157 in [4 mm / 2.5 mm] Centerline, Gray, Wire & Cable, Multilock Connector System

View on TE.com >

Connectors > Automotive Connectors > Connector Housings > MULTILOCK, CONNECTOR HOUSING

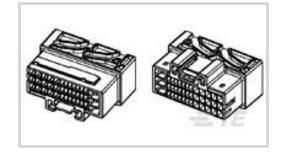

Connector & Housing Type: Housing for Male Terminals

Mating Tab Width: 1.01 mm, 2.28 mm, 6.35 mm [.04 in, .09 in, .25 in]

Connector System: Wire-to-Wire

Number of Positions: 39

Centerline (Pitch): 2.5 mm, 4 mm [.098 in, .157 in]

All MULTILOCK, CONNECTOR HOUSING (576)

Features

Product Type Features

Connector & Housing Shape

Connector & Housing Type

Rectangular

Housing for Male Terminals



Connector System	Wire-to-Wire
Sealable	No
Hybrid Connector	Yes
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	39
Body Features	
Cable Exit Angle	180°
Body Material	PBT GF
Primary Product Color	Gray
Contact Features	
Contact Size	1mm, 2.3mm, 6.3mm
Contact Type	Tab
Mating Tab Width	1.01 mm, 2.28 mm, 6.35 mm[.04 in][.09 in][.

C For support call+1 800 522 6752

07/11/2022 06:26AM | Page 1

Housing for Male Terminals, Wire-to-Wire, 39 Position, .098 in / .157 in [4 mm / 2.5 mm] Centerline, Gray, Wire & Cable, Multilock Connector System



	25 in]
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Polarization Slot
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	2.5 mm, 4 mm[.098 in][.157 in]
Dimensions	
Product Width	35.4 mm[1.39 in]
Product Length	52.1 mm[2.05 in]
Product Height	23.8 mm[.937 in]
Operation/Application	
Circuit Application	Signal
Packaging Features	

Tray No No
No
Compliant
Compliant
Compliant
No Restricted Materials Above Threshold
Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022

Housing for Male Terminals, Wire-to-Wire, 39 Position, .098 in / .157 in [4 mm / 2.5 mm] Centerline, Gray, Wire & Cable, Multilock Connector System



Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free


Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

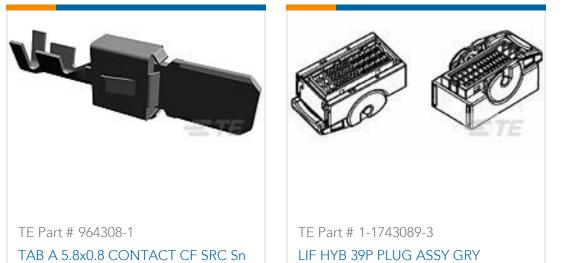

Also in the Series | Multilock Connector System

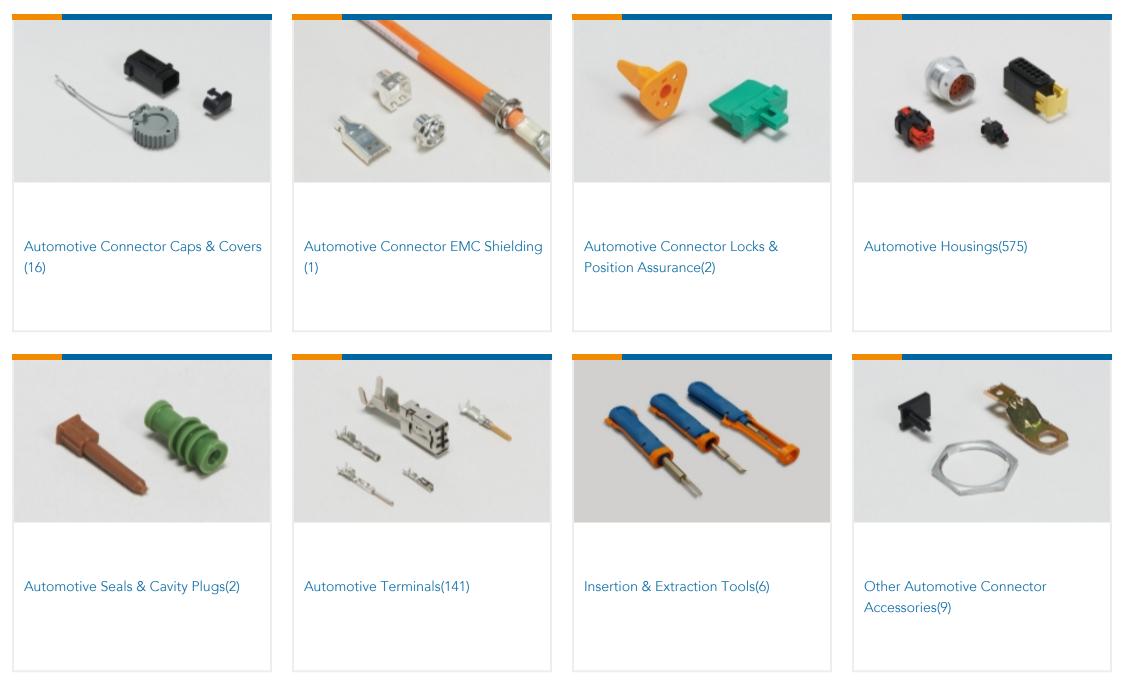


Housing for Male Terminals, Wire-to-Wire, 39 Position, .098 in / .157 in [4 mm / 2.5 mm] Centerline, Gray, Wire & Cable, Multilock Connector System





Customers Also Bought

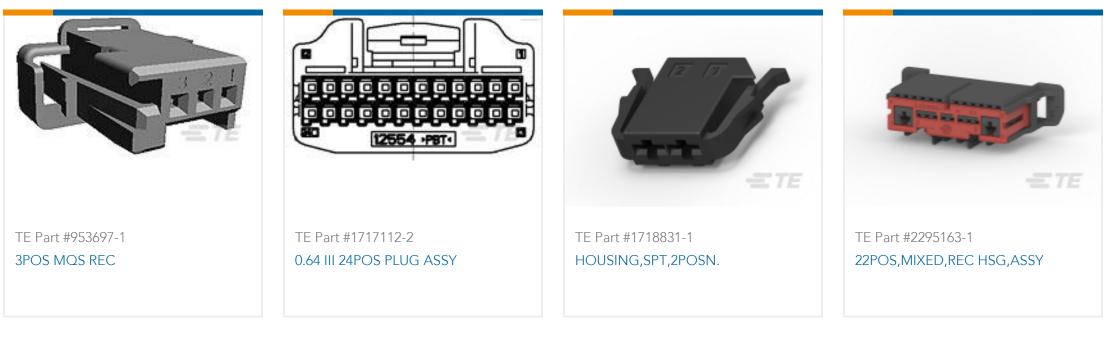



Documents

Product Drawings LIF HYB 39P CAP ASSY GRY

English

CAD Files Customer View Model ENG_CVM_CVM_1-1743086-3_0.2d_dxf.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_1-1743086-3_O.3d_igs.zip English

Customer View Model

ENG_CVM_CVM_1-1743086-3_O.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

& For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 39 Position, .098 in / .157 in [4 mm / 2.5 mm] Centerline, Gray, Wire & Cable, Multilock Connector System



Datasheets & Catalog Pages MULTILOCK Connector System

English