


DIN-Rail Terminal Blocks

W-SERIES

- Screw clamp termination
- Requires no special wire preparation
- High contact force and self-locking clamp
- Wire size range from 26 AWG...250 MCM
- Current load range from 10...225 A
- Voltage range from 300...600 V
- Standard blocks made of beige Wemid
- Available options include a range of colors and material, blown fuse indication (LED) and diodes

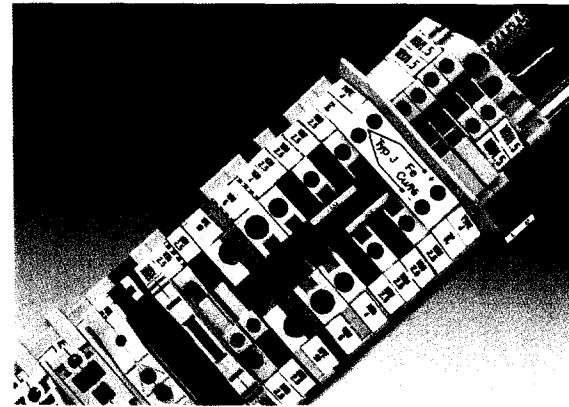

SINGLE-LEVEL FEED THROUGH

Description	Part No.	Description	Part No.
WDU 2.5N	104080	WDU 6	102020
WDU 2.5	102000	WDU 10	102030
WDU 4	102010	WDU 16	102040

DUAL-LEVEL FEED THROUGH

WDK 2.5 N	104160000	WDK 4 N	104190000
-----------	-----------	---------	-----------

BRANCH

WDK 2.5 V	102230	WDK 2.5 LD with LED (6 VDC)	911997
WDK 4 NV	1041910000	WDK 2.5 D with Diode	802561

DISCONNECTS

WTR 2.5	101110	WTR 2.5 with stb	101120
---------	--------	------------------	--------

FUSE

Single-level WSI 6	101100	Single-level WSI 6/2 24 VDC/60 VAC	101420
Single-level WSI 6 24 VDC/60 VAC	101220	Single-level WSI 6/2 48 VDC/120 VAC	101430
Single-level WSI 6 48 VDC/120 VAC	101230	Fuse/Feed Through KDKS 1/35	950331
Single-level WSI 6/2	101400		


GROUND

WPE 2.5	101000	WPE 6	101020
WDK 2.5 PE	103630	WPE 10	101030
WPE 4	101010		


MICRO SERIES — TS 15 DIN-RAIL MOUNTABLE

- 87 points per foot of rail
- Pluggable ZQV jumpers
- 300 V, 15 A, 26...14 AWG


Description	Part No.	Description	Part No.
WDU 1.5/R3.5/15	175328	WDK 1.5/R3.5/15	175329




Single-level Feed Through




Disconnects




Dual-level Feed Through




Fuse



Branch



Ground



More products are available than shown.
Please contact us or visit our website,
www.weidmuller.com.