


## 5.08mm (.200") Pitch SPOX™ Crimp Terminal Housing

**5197-N**

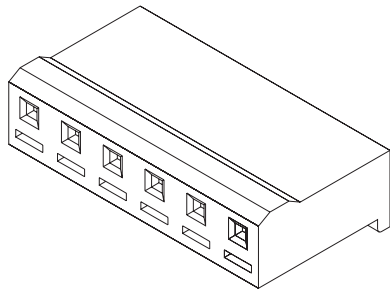

Circuits	Order No.
2	<a href="#">10-01-3026</a>
3	<a href="#">10-01-3036</a>
4	<a href="#">10-01-3046</a>
5	<a href="#">10-01-3056</a>
6	<a href="#">10-01-3066</a>
7	<a href="#">10-01-3076</a>
8	<a href="#">10-01-3086</a>
9	<a href="#">10-01-3096</a>

### Features and Benefits

- Sizes 2 to 9 circuits
- Molded pull tab
- With locking ramp
- Molded-in locking arm for terminal

### Reference Information

Packaging: Bag  
 UL File No.: E29179  
 CSA File No.: LR19980  
 Mates With: 5279-NA, 5280-NA, 5281-NA and  
 5282-NA headers  
 Use With: 5194 terminal  
 Designed In: Millimeters

### Electrical


Voltage: 250V  
 Current: 5194—7.0A  
 5225—4.0A  
 Contact Resistance: 10 milliohms max.  
 Dielectric Withstanding Voltage: 1500V AC/1 min.  
 Insulation Resistance: 1000 Megohms min.

### Physical

Housing: 6/6 nylon, UL 94V-2  
 Operating Temperature: -40 to +105°C

## 5.08mm (.200") Pitch SPOX™ Crimp Terminal Housing

**5198-N  
With Void**

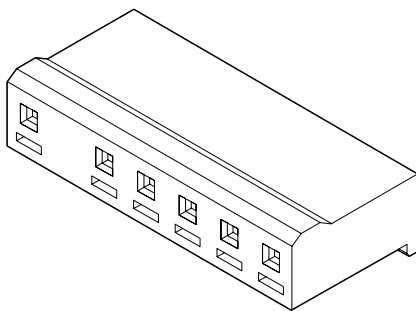

Circuits	Order No.
2	<a href="#">10-22-1022</a>
3	<a href="#">10-22-1032</a>
4	<a href="#">10-22-1042</a>
5	<a href="#">10-22-1052</a>
6	<a href="#">10-22-1062</a>
7	<a href="#">10-22-1072</a>
8	<a href="#">10-22-1082</a>

### Features and Benefits

- Sizes 2 to 8 circuits
- Same as 5197 but with second circuit void

### Reference Information

Packaging: Bag  
 UL File No.: E29179  
 CSA File No.: LR19980  
 Mates With: 5283-NA, 5284-NA, 5285-NA and  
 5286-NA headers  
 Use With: 5194, 5225  
 Designed In: Millimeters

### Electrical

Voltage: 250V  
 Current: 7.0A  
 Contact Resistance: 10 milliohms max.  
 Dielectric Withstanding Voltage: 1500V AC/1 min.  
 Insulation Resistance: 1000 Megohms min.

### Physical

Housing: 6/6 nylon, UL 94V-2  
 Operating Temperature: -40 to +105°C