


SYMBOL DEFINITION		MISSING NUMBERS		DWG STATUS			REVISION HISTORY			AUTH	DR	CK	APVD	
THE NUMBER INSIDE THE SYMBOL CORRESPONDS TO THE NUMBER ON THE INSPECTION REPORT FOR THIS DRAWING/PART NUMBER	TOTAL NO. OF SYMBOLS ON DRAWING	DATE	STG	REV	CHG	N/P	ZONE	DATE	STG	REV	CHG	N/P	ZONE	
4	4	25M199	R	001	-	-		CLEARED REVISION COLUMN - 12015833 - OBSOLETE			990003	MAR	MAR	LRT
		03SE99	R	002	-	-		12015833, 35, 36, 68, 72, 12015252, 53, 55, 12015333 - REINSTATE			990010	HH	CMP	JH
		03SE99	R	003	-	-		12015832, 33, 35, 36, 68, 69, 70, 72, 12015252, 53, 55, 12015333 - REVISED ANTI-ROTATION COLUMN			195278	HH	CMP	JH
		03SE99	R	004	-	-		12015833, 35, 36, 68, 72, 12015252, 53, 55, 12015333 - OBSOLETE			990003	HH	CMP	JH

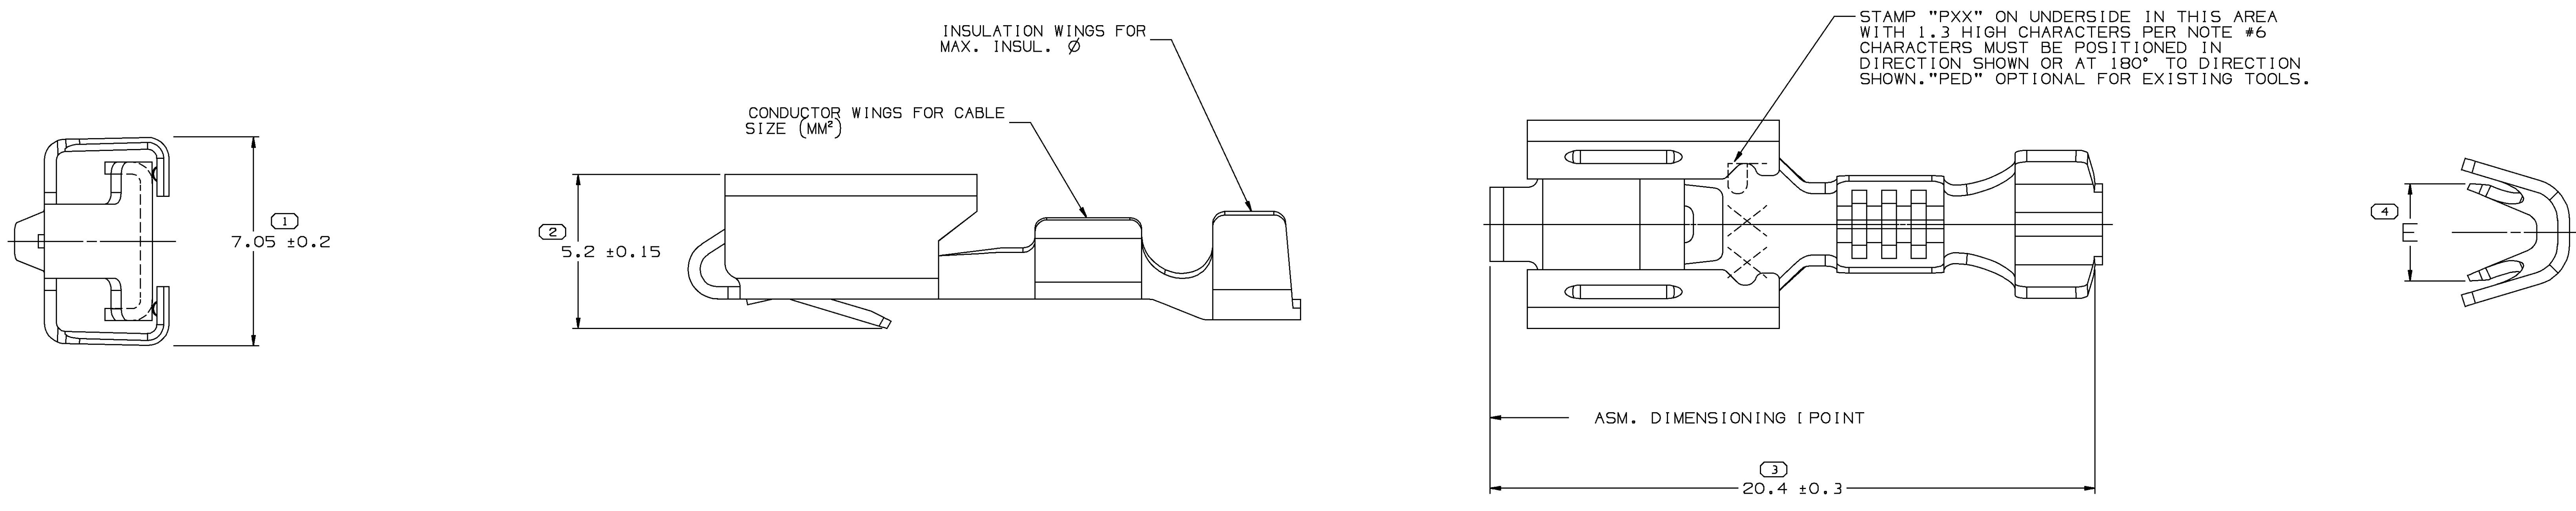

NOTES

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION. (SEE MATH MODEL FOR PRECISE DIMENSIONS.) FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA. ALL RADII 0.4
- A R 0.4 MAX IS PERMISSIBLE ON ALL "SHARP" CORNERS UNLESS OTHERWISE SPECIFIED. ALL LOCKING FEATURES MUST HAVE SHARP CORNERS
- TERMINALS TO HAVE TERMINAL ENGAGE OF 8N TO 28N AND TERMINAL DISENGAGE OF 8N TO 28N WHEN MATED TO A 6.3 X 0.81 HARDENED STEEL BLADE. (DISENGAGE MAY BE EXCLUDED WHEN BOX HEIGHT, BOX WIDTH, MINIMUM BOX ENTRANCE, NOSE RADIUS AND TERMINAL ENGAGE ARE MAINTAINED)
- RECOVERY NOTE - AFTER INSERTION INTO A 4.3 FUNCTIONAL GAGE, 5.4 TANG MUST RECOVER TO A MINIMUM OF 4.7.
- VISIBLE CRACKS ARE NOT PERMISSIBLE.
- "PXX" INDICATES "P" PLUS LAST TWO DIGITS OF MAKE SERIES NUMBERS (P01,P02,P03.ETC).

PART NO	STG	REV	N/P	STATUS	MAT'L SIZE	MAT'L SPEC	CABLE	PART NO	REV	STATUS	MAT'L SIZE	MAT'L SPEC	SIZE	ID	TYPE			
12089675		A		OBSOLETE	0.406X33.73	S-1519445		12084596	D		0.406X33.73	P-1519445	(215-3	211	5.24-3.49	104	6.6	YES
12066268		E			0.406X33.73	S-1519445		12052222	E		0.406X33.73	P-1519445	0.5-0.35	21	2.51-1.84	103	2.4+0.2	
12066276		E			0.406X33.73	S-1519445		12052224	E		0.406X33.73	P-1519445	3	12	3.1-2.94	104	4.6	YES
12020143		F		OBSOLETE	0.406X33.73	S-1519445		12020144	G	OBSOLETE	0.406X33.73	P-1519445	(210.35	222	2-1.35	102	3.6	
								12020035	G		0.406X33.73	P-1519445	(210.8-0.5	219	3.12-2.03	101	5.1	
12015836		D3		OBSOLETE	0.406X33.73	S-1519445		12015868	E3	OBSOLETE	0.406X33.73	P-1519445	(215-3	211	5.24-3.49	101	6.6	YES
12015835		E3		OBSOLETE	0.406X33.73	S-1519445		12015872	F3	OBSOLETE	0.406X33.73	P-1519445	0.35	22	2-1.84	102	2.2	
12015833		E3		OBSOLETE	0.406X33.73	S-1519445		12015870	F1		0.406X33.73	P-1519445	2-1	15	3.97-2.48	101	3.7	YES
12015832		H1			0.406X33.73	S-1519445		12015869	J1		0.406X33.73	P-1519445	0.8-0.5	19	3.12-2.03	103	3.2	
12015333		G3		OBSOLETE	0.406X33.73	S-1403445						(215-3	211	5.24-3.49	101	6.6	YES	
								12015255	F3	OBSOLETE	0.406X33.73	K-1403445	0.35	23	2-1.84	102	2.2	
								12015253	E3	OBSOLETE	0.406X33.73	K-1403445	2-1	15	3.97-2.48	101	3.7	YES
								12015252	E3	OBSOLETE	0.406X33.73	K-1403445	0.8-0.5	19	3.12-2.03	101	3.2	
												0.8-0.5	19	3.12-2.03	101	3.2		
												SIZE	10	Ø				

DELPHI
Automotive Systems

MATERIAL SPEC: 6900
SEE CHART

DIMENSIONAL RANGE (MM) CHART D

FROM	TO	D	> 12
		TOLERANCE UNLESS OTHERWISE SPECIFIED	
		±0.1	±0.2
		ANGULAR TOLERANCE ± 2'	

PART DRAWING

CODE NUMBER: 6900
OC SPEC: C-1156

DWG DATE: 14MR86
STYLE: 14MR86

SCALE: 10:1
VOLUME: cm³

PART GEOMETRY: 3D SOLID

UNLESS OTHERWISE SPECIFIED:
PERFECT FORM REQUIRED FOR FEATURES OF SIZE AT MMC. TRUE POSITION TOLERANCES AND RELATED DATUMS APPLY AT CONDITION OF SIZE INDICATED IN FEATURE CONTROL FRAME. ALL OTHER GEOMETRIC TOLERANCES AND RELATED DATUMS APPLY RFS. SEPARATE TRUE POSITION CALLOUTS MAY BE GAGED SEPARATELY, REGARDLESS OF DATUM REFERENCE.

CHANGE RESTRICTED NO MANUAL CHANGES

COPY OF MATH DATA DO NOT SCALE

REFERENCE: 001,701

DR: APVD1 J. C. ORTIZ (OBJA99), APVD2 MANUEL VEGA (2BJA99), APVD3, APVD4, APVD5

METRIC UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS

THIRD ANGLE PROJECTION

DRAWING NAME: TERM F M/P 630

SHEET NUMBER: 1 OF 4
DRAWING NUMBER: 12065521

DWG STATUS: R 004
SIZE: A0