


**187 Series C-Crimp Flag Receptacles**

C-Crimp Line




A — 187 Series C-Crimp Flag Receptacles

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	RU	SP	Terminal Part Number
20-16	A	.020 0.51	.090-.130 2.29-3.30	Brass	.014 0.36	.522 13.26	X	—	X	1217009-1
		.020 0.51	.090-.130 2.29-3.30	Brass, Tin Plated	.014 0.36	.522 13.26	X	—	X	1217009-2
		.032 0.81	.090-.130 2.29-3.30	Brass	.014 0.36	.522 13.26	X	—	X	1217010-1
		.032 0.81	.090-.130 2.29-3.30	Brass, Tin Plated	.014 0.36	.522 13.26	X	—	X	1217010-2
18-14	A	.032 0.81	.100-.155 2.54-3.94	Brass	.016 0.41	.535 13.59	X <sup>1</sup>	—	X <sup>1</sup>	1217244-1
		.032 0.81	.100-.155 2.54-3.94	Brass, Tin Plated	.016 0.41	.535 13.59	X	—	X	1217244-2
		.032 0.81	.100-.155 2.54-3.94	Phos. Bronze	.016 0.41	.535 13.59	X <sup>1</sup>	—	X <sup>1</sup>	1217527-1
		.032 0.81	.100-.155 2.54-3.94	Phos. Bronze, Tin Plated	.016 0.41	.535 13.59	X	—	X	1217527-2


<sup>1</sup> 16 & 18 AWG only.

**187 Series F-Crimp Flags**


F-Crimp Line



A — Center Strip with Insulation Support

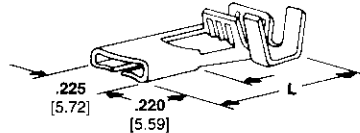

B — Commercial Line with Insulation Support



C — Center Strip with No Insulation Support

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	RU	SP	Terminal Part Number
22-18	B	.020 0.51	.060-.070 1.52-1.78	Brass	.012 0.31	.535 13.59	X	—	X	62085-1
		.020 0.51	.060-.070 1.52-1.78	Brass, Tin Plated	.012 0.31	.535 13.59	X	—	X	62085-2
20-16	A	.020 0.51	.090-.130 2.29-3.30	Brass	.012 0.31	.596 15.14	—	—	—	626412-1
		.020 0.51	.090-.130 2.29-3.30	Brass	.012 0.31	.545 13.84	X	—	X	60755-1
	B	.020 0.51	.090-.130 2.29-3.30	Brass, Tin Plated	.012 0.31	.545 13.84	X	—	X	60755-2
		.032 0.81	.090-.130 2.29-3.30	Brass	.012 0.31	.545 13.84	X	—	X	63848-1
18-14	A	.032 0.81	.090-.130 2.29-3.30	Brass, Tin Plated	.012 0.31	.545 13.84	X	—	X	63848-2
		.020 0.51	.060-.150 1.52-3.81	Brass	.016 0.41	.430 10.92	X	—	X	63512-1
		.032 0.81	.060-.150 1.52-3.81	Brass	.016 0.41	.430 10.92	X	—	X	63316-1
	C	.032 0.81	.060-.150 1.52-3.81	Brass, Tin Plated	.016 0.41	.430 10.92	X	—	X	63316-2
		.032 0.81	.060-.150 1.52-3.81	Steel, Nickel Plated	.016 0.41	.430 10.92	X	—	X	63316-3
		.032 0.81	—	Brass	.016 0.41	.430 10.92	X	—	X	63317-1