


### Positive Lock | Positive Lock 187

TE Internal #: 1217096-2 Quick Disconnects, Receptacle, 18 – 14 AWG Wire Size, .82 – 2.08 mm<sup>2</sup> Wire Size, Mating Tab Width .187 in [4.75 mm], Straight, Brass, Positive Lock 187

### View on TE.com >

Terminals & Splices > Quick Disconnects

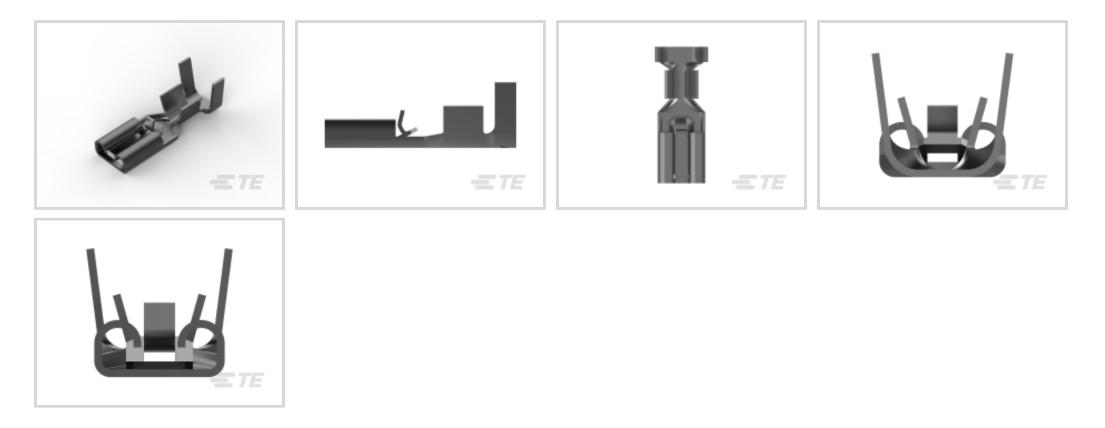

Quick Disconnect Terminal Type: Receptacle

Wire Size: .82 – 2.08 mm<sup>2</sup>

Mating Tab Width: 4.75 mm [.187 in ]

Mating Tab Thickness: .81 mm [.032 in ]

# Features

# Product Type Features



Terminates To	Wire & Cable
Wire Stop	Yes
Wire/Cable Type	Regular Wire
Insertion Force	Normal
Sealable	No
Configuration Features	
Connection Capacity	Single
Contact Features	
Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	4.75 mm[.187 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp

**C** For support call+1 800 522 6752

# 1217096-2

Quick Disconnects, Receptacle, 18 – 14 AWG Wire Size, .82 – 2.08 mm<sup>2</sup> Wire Size, Mating Tab Width .187 in [4.75 mm], Straight, Brass, Positive Lock 187



Barrel Type	Open
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Accepts Wire Insulation Diameter Range	3.81 – 5.08 mm[.15 – .2 in]
Overall Length	17.02 mm[.67 in]
Receptacle Terminal Stock Thickness	.36 mm[.014 in]
Wire Size	$.82 - 2.08 \text{ mm}^2$
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]
Packaging Features	
Packaging Quantity	10000
Packaging Method	Strip/Reel

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous

### 1217096-2

Quick Disconnects, Receptacle, 18 – 14 AWG Wire Size, .82 – 2.08 mm<sup>2</sup> Wire Size, Mating Tab Width .187 in [4.75 mm], Straight, Brass, Positive Lock 187



materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# Compatible Parts



TE Part # 2-2150539-2 OCEAN\_2.0\_Applicator-E-120F220F



TE Part # 2150539-2 OCEAN\_2.0\_Applicator-E-120F220F




TE Part # 2825431-1 187 SERIES POSITIVE LOCK (MARK-II) REC



TE Part # 2825431-2 187 SERIES POSITIVE LOCK REC, LOOSE PIECE



TE Part # 7-2150539-2 OCEAN\_2.0\_Applicator-E-120F220F




TE Part # 7-2150539-7 OCEAN\_2.0\_SPARE\_PART\_KIT-120F220F



PL 187 REC 20-16 AWG 0.3 X 14.0 PTPBR



# Also in the Series | Positive Lock 187

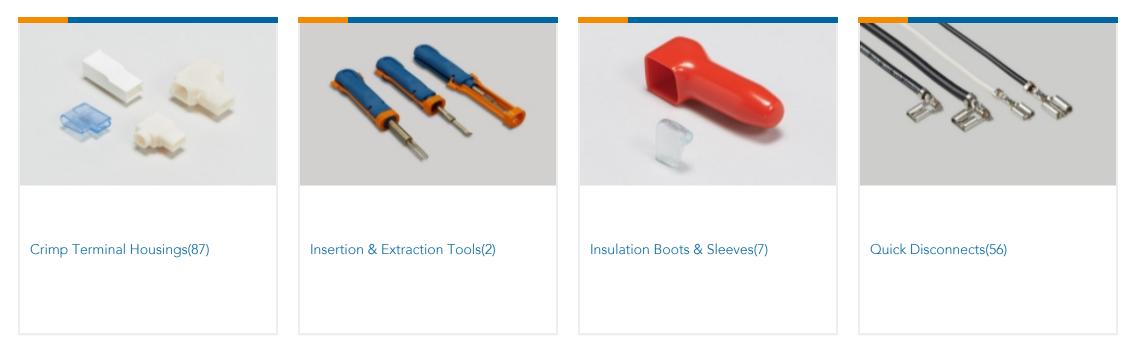

# Customers Also Bought



# 1217096-2

Quick Disconnects, Receptacle, 18 – 14 AWG Wire Size, .82 – 2.08 mm<sup>2</sup> Wire Size, Mating Tab Width .187 in [4.75 mm], Straight, Brass, Positive Lock 187



 TE Part #1-963735-1 TAB 5.8x0.8 CONTACT CS SRC Sn
 TE Part #CP5063-000 MT-LWA.1/38 X-SP
 TE Part #CP5066-000 MT-LWA.1/32 X-SP
 TE Part #CP5067-000 MT-LWA.3/64 X-SP

 TE Part #CM9831-000 MT-LWA.094 X-SP
 TE Part #2322637-1 12POS.MQS.REC HSG.UNSLD
 TE Part #2322637-1

# Documents

Product Drawings PL 187 RECEPTACLE 18-14 AWG TPBR

English

CAD Files

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_1217096-2\_J.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1217096-2\_J.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1217096-2\_J.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Environmental Compliance Product Compliance English

**Product Compliance** 

English