

# 2.0mm (0.079") Side Entry Female Header (Double Row)



## 1231 Series

### APPLICATION AND FEATURES

1. High quality dual beam phosphor bronze contacts.
2. Designed for board to board small spacing interconnection.
3. Mating with 2.0mm pitch 0.5mm Pin Headers such as 1202 & 1205 series.

### SPECIFICATIONS

Current Rating: 1 Amp  
 Insulator resistance: 5000 Megohms min.  
 Contact resistance: 20 m ohm Max.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40° to +105°C  
 Max Processing Temp: 230° for 30~60 seconds  
 (260° for 10 seconds)  
 Contact Material: Phosphor bronze  
 Insulator Material: Polyester, UL 94V-0  
 ©Standard: Nylon-6T

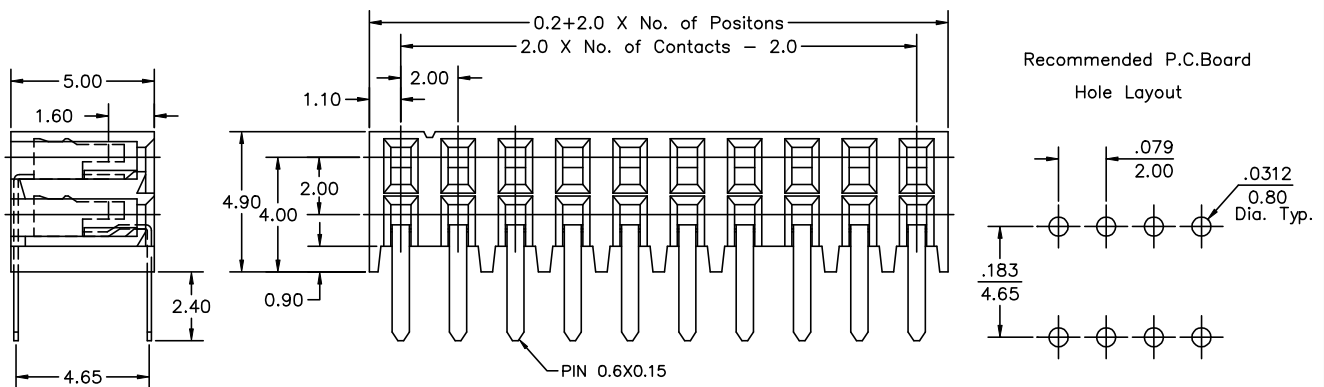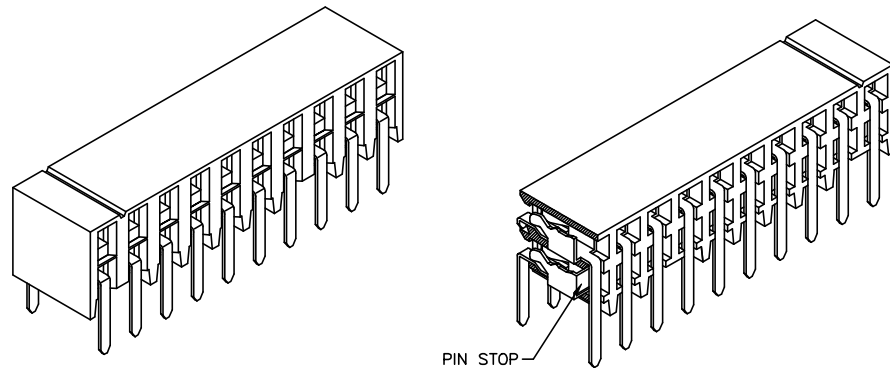

### Order Information 1231 Series

Example:  -  -

<b>Series No.</b>	<b>Number of Contacts</b>	<b>Contact Plating</b>
1231	06 to 50 Contacts	Tin Plated <input type="text" value="01"/>
		Gold Plated
		Flash <input type="text" value="02"/>
		10 μ" <input type="text" value="10"/>
		30 μ" <input type="text" value="30"/>