SYMBOL DEFINITION		
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL (9) DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	9
	LAST NO. USED	8

MISSING SYMBOLS
NO MISSING SYMBOL NUMBER

DWG STATUS					ZONE	REVISION HISTORY	AUTH	DR	APVD 1	APVD 2
DATE	STG	REV	N/P	CHG						
06NOO1	R	05	-			REDRAWN TO PD; ALL PARTS - ADDED DIM	216976	EGR	EGR	RC



TYPE 402

SAME AS TYPE 401
EXCEPT AS SHOWN

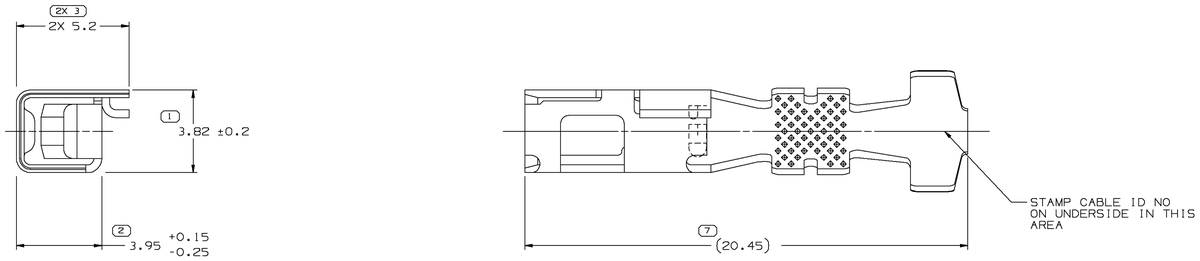

TYPE 401

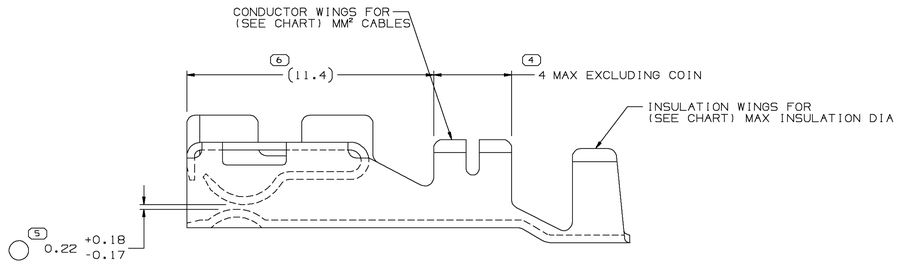

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
   DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.

2. RECOMMENDED MATING BLADE - WIDTH 2.8 ±0.08, THICKNESS 0.86/0.79 AND LENGTH 7.5 ±0.15.

PART NO	REV	STATUS	MAT'L SPEC	MAT'L SIZE	PART NO	REV	N/P	STATUS	MAT'L SPEC	MAT'L SIZE	SIZE (MM²)	DIA	ID	TYPE	E ±0.4
					12186461	A1	-		P1519456 425 TIN BRS EX HD SN PLTD	0.360 X 26.61	TWO 0.35	1.69-1.47	222	402	2.7
					12186460	A1	-		P1519456 425 TIN BRS EX HD SN PLTD	0.360 X 26.61	TWO 0.5	2.19-1.69	220	402	3.5
					12186459	A1	-		P1519456 425 TIN BRS EX HD SN PLTD	0.360 X 26.61	TWO 1.0/0.8	2.42-1.96	217	401	4.2
					12186458	A1	-		P1519456 425 TIN BRS EX HD SN PLTD	0.360 X 26.61	0.5-0.35	2.19-1.47	21	402	2.4
					12186457	A1	-		P1519456 425 TIN BRS EX HD SN PLTD	0.360 X 26.61	1.0-0.8	2.64-1.96	17	402	2.8
					12186456	A1	-		P1519456 425 TIN BRS EX HD SN PLTD	0.360 X 26.61	3.0-2.0	3.65-2.50	13	401	4
UNPLATED					PLATED						CABLE				

(5) PROCESS SENSITIVE DIMENSION

DIMENSIONS ENCLOSED IN ( ) INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED

DIMENSIONAL RANGE (MM)	CHART D
FROM 0	>12
TO 12	

TOLERANCE UNLESS OTHERWISE SPECIFIED
±0.1 ±0.2
ANGULAR TOLERANCE ±2°

DWG TYPE: PART DRAWING
STYLE
VOLUME (CM³)
DISTR CODE: D
ROUTING: 6900

UNLESS OTHERWISE SPECIFIED
THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS AMENDED BY THE DM GLOBAL DIMENSIONING AND TOLERANCING ADDENDUM - 1997. ALL GEOMETRIC TOLERANCES ARE TO BE MEASURED AT 23°C (NOT INCLUDING COATING). ALL GEOMETRIC TOLERANCES WHICH RELATE LOCATION BETWEEN FEATURES IS ESTABLISHED BY ORIENTATION OR LOCATION TOLERANCES. SEPARATE POSITION CALLOUTS MAY BE GIVEN SEPARATELY, REGARDLESS OF DATUM REFERENCE.

REFERENCE

THIRD ANGLE PROJECTION

DO NOT SCALE
USE MATH DATA

UNIGRAPHICS

DELPHI
DELPHI PACKARD ELECTRIC SYSTEMS
WARREN, OH

		DATE
DR		
APVD1	RUBEN ORTIZ	08JL96
APVD2	ENRIQUE BAEZ	11JL96
APVD3	O. GALLEGOS	27AU96
APVD4		
APVD5		

SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001

MATERIAL: SEE CHART

DRAWING NAME: TAXI TERM ACT 280

DRAWING NUMBER: 12084994

SIZE	SCALE	FRAME NO	SHEET NO	STG	REV	N/P
A0	10:1	1 OF 1	4 OF	R	05	-