SYMBOL DEFINITION		
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL ( ) DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	12
	LAST NO. USED	11

MISSING SYMBOLS
NO MISSING SYMBOL NUMBER

DWG STATUS					ZONE	REVISION HISTORY	AUTH	DR	APVD 1	APVD 2
DATE	STG	REV	N/P	CHG						
16JN03	R	01	-	-		REDRAWN TO PD1 ALL PARTS - UPDATED PDM ATTRIBUTES	241764	LOA	FKV	JMP
14OC03	R	02	-	-		12092347 - UPDATED PDM ATTRIBUTES	247376	AMG	AMG	JMP
21OC03	R	03	-	-		ALL PARTS - UPDATED ECL COLUMN OF CHART	247759	FKV	FKV	JMP



TYPE 102
SAME AS TYPE 101
EXCEPT AS SHOWN



VIEW TO X-X

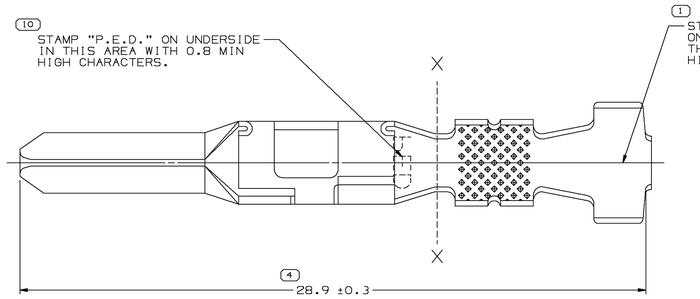

TYPE 101



VIEW TO X-X

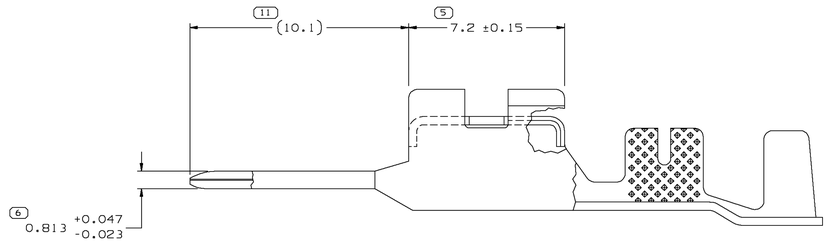

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
   DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
2. MATING TERMINAL 12084995 OR EQUIVALENT.
3. * DENOTES DIMENSIONS MADE AT CUT-OFF AND CRIMP DIE.
4. COIN ON INSULATION WING NOT REQUIRED WHEN MATERIAL THICKNESS IS 0.57 OR LESS.
5. MAXIMUM CURRENT CAPACITY IS 25 AMPS.
6. FOR SOLDERABILITY REQUIREMENTS SEE ESO-1503.

PART NO	REV	N/P	STATUS	MAT'L SPEC	MAT'L SIZE	SIZE (MM^2)	DIA	ID	TYPE	$E_{\pm 0.4}$	$F_{\pm 0.4}$
				PLATED		CABLE					
12092349	C2	-	-	M3607465 C42500 1/2 HD	0.381 X 36.14	TWO 0.35	1.69-1.47	222	102	2.7	5.2
12092348	C2	-	-	M3607465 C42500 1/2 HD	0.381 X 36.14	TWO 0.5	2.19-1.69	220	102	3.5	5.8
12092347	C3	-	-	M3607465 C42500 1/2 HD	0.381 X 36.14	TWO 1-0.5	2.42-1.96	217	101	4.2	6.7
12092346	C2	-	-	M3607465 C42500 1/2 HD	0.381 X 36.14	0.5-0.35	2.19-1.47	21	102	2.4	3.8
12092345	C2	-	-	M3607465 C42500 1/2 HD	0.381 X 36.14	1-0.8	2.64-1.96	17	102	2.8	4.4
12092344	C2	-	-	M3607465 C42500 1/2 HD	0.381 X 36.14	3-2	3.65-2.5	13	101	4	5.6

DWG TYPE	PART DRAWING
STYLE	
VOLUME (CM³)	DISTR CODE
ROUTING 6900	

UNLESS OTHERWISE SPECIFIED
THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS AMENDED BY THE DM BLOCAL DIMENSIONING AND TOLERANCING ADDENDUM - 1997. ALL GEOMETRIC TOLERANCES AND RELATED DATUMS APPLY PER%. RULE #1(PERFECT FORM AT MMC) DOES NOT APPLY WHEN RELATIONSHIP BETWEEN FEATURES IS ESTABLISHED BY ORIENTATION OR LOCATION TOLERANCES. SEPARATE POSITION CALLOUTS MAY BE GIVEN SEPARATELY, REGARDLESS OF DATUM REFERENCE.
ALL DIMENSIONS ARE IN MILLIMETERS

(6) PROCESS SENSITIVE DIMENSION

DIMENSIONS ENCLOSED IN ( ) INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED

REFERENCE

DIMENSIONAL RANGE (MM)	CHART D
FROM 0	>12
TO 12	

TOLERANCE UNLESS OTHERWISE SPECIFIED
±0.1 ±0.2
ANGULAR TOLERANCE ±2°

THIRD ANGLE PROJECTION

DO NOT SCALE
USE MATH DATA

UGS GRAPHICS

DELPHI

DELPHI PACKARD ELECTRIC SYSTEMS
WARREN, OH

	DATE
DR	
APVD1 T. NADASKY	01MAR89
APVD2 R.J. BLASKO	31MAR89
APVD3 R. PETROSKY	31MAR89
APVD4	
APVD5	

SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001

MATERIAL
SEE CHART

DRAWING NAME
TAXI TERM ACT 280

DRAWING NUMBER
12092343

SIZE	SCALE	FRAME NO	SHEET NO	STG	REV	N/P
AO	10:1	1 OF 1	1 OF 1	R	03	-