

1375876-2 ✓ ACTIVE

AMPMODU | AMPMODU MICRO

TE Internal #: 1375876-2

Connector Contact, Pin, Wire-to-Board, .031 in [.8 mm] Centerline,
30 – 28 AWG Wire Size, 100.5 – 159.8 CMA Wire Size, AMPMODU
MICRO

[View on TE.com >](#)



Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Contacts



Contact Type: **Pin**

Connector System: **Wire-to-Board**

Centerline (Pitch): **.8 mm [.031 in]**

Wire Size: **100.5 – 159.8 CMA**

Features

Product Type Features

| | |
|-----------------------------------|---------------|
| Connector System | Wire-to-Board |
| Sealable | No |
| Connector & Contact Terminates To | Wire & Cable |

Configuration Features

| | |
|-----------------------------------|---------------|
| Compatible With Wire & Cable Type | Discrete Wire |
|-----------------------------------|---------------|

Electrical Characteristics

| | |
|---------------------------------------|---------|
| Dielectric Withstanding Voltage (Max) | 250 VAC |
| Insulation Resistance | 500 MΩ |
| Operating Voltage | 30 VAC |

Contact Features

| | |
|---|-------------------------------|
| PCB Contact Termination Area Plating Material Thickness | 2.54 – 5.08 μm[100 – 200 μin] |
| Mating Tab Width | 1.33 mm[.052 in] |
| Mating Tab Thickness | .2 mm[.008 in] |
| Contact Underplating Material Thickness | 1.27 μm[50 μin] |



| | |
|---|--------------------------|
| Wire Contact Termination Area Plating Thickness | 1.27 μ m |
| Wire Contact Termination Area Plating Material | Tin |
| Contact Mating Area Plating Material Thickness | .76 μ m[30 μ in] |
| Contact Underplating Material | Nickel |
| PCB Contact Termination Area Plating Material | Tin-Lead |
| Contact Base Material | Phosphor Bronze |
| Contact Type | Pin |
| Contact Mating Area Plating Material | Gold |
| Contact Current Rating (Max) | 1 A |

Mechanical Attachment

| | |
|-------------------------|-------------|
| Connector Mounting Type | Board Mount |
|-------------------------|-------------|

Housing Features

| | |
|--------------------|----------------|
| Centerline (Pitch) | .8 mm[.031 in] |
|--------------------|----------------|

Dimensions

| | |
|--|---------------------------|
| Accepts Wire Insulation Diameter Range | .6 mm[.024 in] |
| Wire Size | .05 – .08 mm ² |

Usage Conditions

| | |
|-----------------------------|---------------------------|
| Operating Temperature Range | -55 – 85 °C[-65 – 185 °F] |
|-----------------------------|---------------------------|

Operation/Application

| | |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

Industry Standards

| | |
|------------------------|------------|
| Approved Standards | UL E28476 |
| UL Flammability Rating | UL 94V-0 |
| Agency/Standard | UL |
| UL File Number | E28476 |
| UL Rating | Recognized |

Packaging Features

| | |
|--------------------|---------|
| Packaging Quantity | 20000 |
| Packaging Method | Package |

Other

| | |
|---------|----------------------|
| Comment | Use in plug housing. |
|---------|----------------------|



Product Compliance

For compliance documentation, visit the product page on TE.com>

















| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Not Compliant |
| EU ELV Directive 2000/53/EC | Not Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Pb (13% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability |

Product Compliance Disclaimer





This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


| | | | |
|---|---|---|---|
|  <p>TE Part # 1375875-1 PLUG HSG,6 POS,0.8MM MICRO INT</p> |  <p>TE Part # 1375875-2 PLUG HSG,8 POS,0.8MM MICRO INT</p> |  <p>TE Part # 1375875-4 PLUG HSG,12POS,0.8MM MICRO INT</p> |  <p>TE Part # 1445340-1 PLUG HSG,4 POS,0.8MM MICRO INT</p> |
|---|---|---|---|

| | | | |
|---|---|---|---|
|  <p>TE Part # 1375875-3 PLUG HSG,10POS,0.8MM MICRO INT</p> |  <p>TE Part # 1-1375875-0 PLUG HSG,24POS,0.8MM MICRO INT</p> |  <p>TE Part # 1-1375875-1 PLUG HSG,26POS,0.8MM MICRO INT</p> |  <p>TE Part # 1-1375875-2 PLUG HSG,28POS,0.8MM MICRO INT</p> |
|  <p>TE Part # 1-1375875-4 PLUG HSG,32POS,0.8MM MICRO INT</p> |  <p>TE Part # 1-1375875-6 PLUG HSG,36POS,0.8MM MICRO INT</p> |  <p>TE Part # 1-1375875-8 PLUG HSG,40POS,0.8MM MICRO INT</p> |  <p>TE Part # 1375875-5 PLUG HSG,14POS,0.8MM MICRO INT</p> |
|  <p>TE Part # 1375875-6 PLUG HSG,16POS,0.8MM MICRO INT</p> |  <p>TE Part # 1375875-7 PLUG HSG,18POS,0.8MM MICRO INT</p> |  <p>TE Part # 1375875-8 PLUG HSG,20POS,0.8MM MICRO INT</p> |  <p>TE Part # 1375876-1 PLUG CONT,STAMP,0.8MM MIC INT</p> |
|  <p>TE Part # 1385161-2 HDM 5SMPR033F K</p> |  <p>TE Part # 1385161-3 HDM 5SMPR033F G</p> |  <p>TE Part # 2-2837685-2 OCEAN-2.0-APPLICATOR-S-033F</p> |  <p>TE Part # 2837685-2 OCEAN-2.0-APPLICATOR-S-033F</p> |

Also in the Series | **AMPMODU MICRO**

| | | | |
|---|--|--|--|
|  <p>PCB Connector Strain Relief(2)</p> |  <p>PCB Headers & Receptacles(23)</p> |  <p>Wire-to-Board Connector Assemblies & Housings(15)</p> |  <p>Wire-to-Board Connector Contacts(3)</p> |
|---|--|--|--|

Customers Also Bought

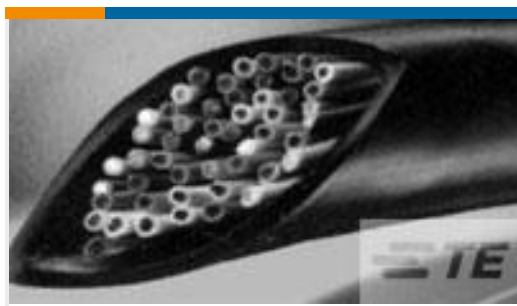


TE Part #5603764002
NTFR-1/8-0-SP



TE Part #890103-000
S1124-TAPE-0.75X100-FT



TE Part #8-1617760-3
FCB-405-0622M=M83536/6-022M

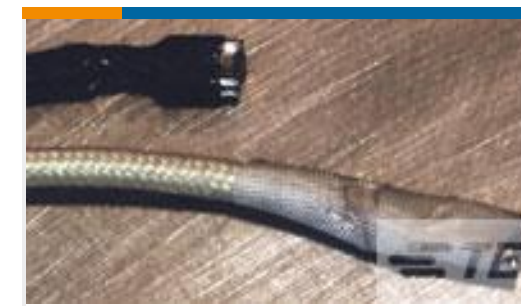

TE Part #1719534002
RT555-2-0-SP



TE Part #YDTS26W19-35SAV001
PLUG ASSY



TE Part #YDTS26W23-35PAV001
D38999: Straight Plug, 23-35 Insert



TE Part #YDBC54H-10-6PNV001
HERM RECP



TE Part #59520W25
BACKSHELL

Documents

Product Drawings

[PLUG CONT,PLATED,0.8MM MIC INT](#)

English

CAD Files

Customer View Model

[ENG_CVM_1375876-2_B.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_1375876-2_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_1375876-2_B.3d_stp.zip](#)

English

3D PDF

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1375876-2_C.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1375876-2_C.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1375876-2_C.3d_stp.zip](#)

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

[Product Specifications](#)

[Application Specification](#)

English