# 1376478-4 ! PENDING OBSOLESCENCE

#### AMP Signal Double Lock

TE Internal #: 1376478-4

TE Internal Description: 2.5MM SIGNAL MATE CONN HEADER

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles



Connector System: Wire-to-Board

Number of Positions: 4

Number of Rows: 1

Centerline (Pitch): 2.5 mm [.098 in]

PCB Mount Orientation: Vertical

### Features

#### **Product Type Features**



Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header
Configuration Features	
Number of Positions	4
Number of Rows	1
PCB Mount Orientation	Vertical
Electrical Characteristics	
Operating Voltage	50 VAC
Body Features	
Primary Product Color	Natural
Contact Features	
Contact Layout	Inline

1376478-4



Contact Mating Area Length	4.35 mm[.17 in]
Mating Square Post Dimension	.5 mm[.02 in]
PCB Contact Termination Area Plating Material Thickness	.8 – 1.6 μm[31.49 – 62.99 μin]
Contact Underplating Material Thickness	.5 – 1.2 μm[19.68 – 47.24 μin]
Contact Mating Area Plating Material Thickness	.8 μm[31.49 μin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Square
Contact Mating Area Plating Material Finish	Matte
Contact Underplating Material	Copper
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Mating Area Plating Material	Tin
Contact Type	Pin
Contact Current Rating (Max)	2.5 A
Termination Features	
Square Termination Post & Tail Dimension	.5 mm[.02 in]
Termination Post & Tail Length	3.2 mm[.126 in]

Termination Method to Printed Circuit Board

Through Hole - Solder

		THILL O	

### Mechanical Attachment

PCB Mount Alignment Type	Boss
Mating Alignment Type	Polarization
Mating Retention	With
PCB Mount Retention Type	Kinked
Mating Retention Type	Latch
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	With
Housing Features	
Housing Material	Nylon 66 GF
Centerline (Pitch)	2.5 mm[.098 in]
Dimensions	



Connector Length	12.5 mm[.49 in]
Connector Height	8.8 mm[.34 in]
Connector Width	8.2 mm[.32 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Usage Conditions	
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	
Packaging Quantity	300
Packaging Type	Bag, Box
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022	
	(223)	
	Candidate List Declared Against: DEC 2013	
	(151)	
	SVHC > Threshold:	
	Not Yet Reviewed	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	

Solder Process Capability

Wave solder capable to 265°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling



based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

# Compatible Parts



TE Part # CAT-SI261-H342 STD Temp Signal Double Lock Header




# Also in the Series AMP Signal Double Lock




Contraction of the second			Statistic second
PCB Latches, Locks & Retainers(17)	Rectangular Caps & Covers(1)	Rectangular Connector Housings(23)	Rectangular Connector Locking(2)
Rectangular Connector Seals(10)	Rectangular Power Connectors(3)	Standard Rectangular Connectors(1)	Wire-to-Board Connector Assemblies & Housings(74)

2.5MM SIGNAL MATE CONN HEADER





## Customers Also Bought

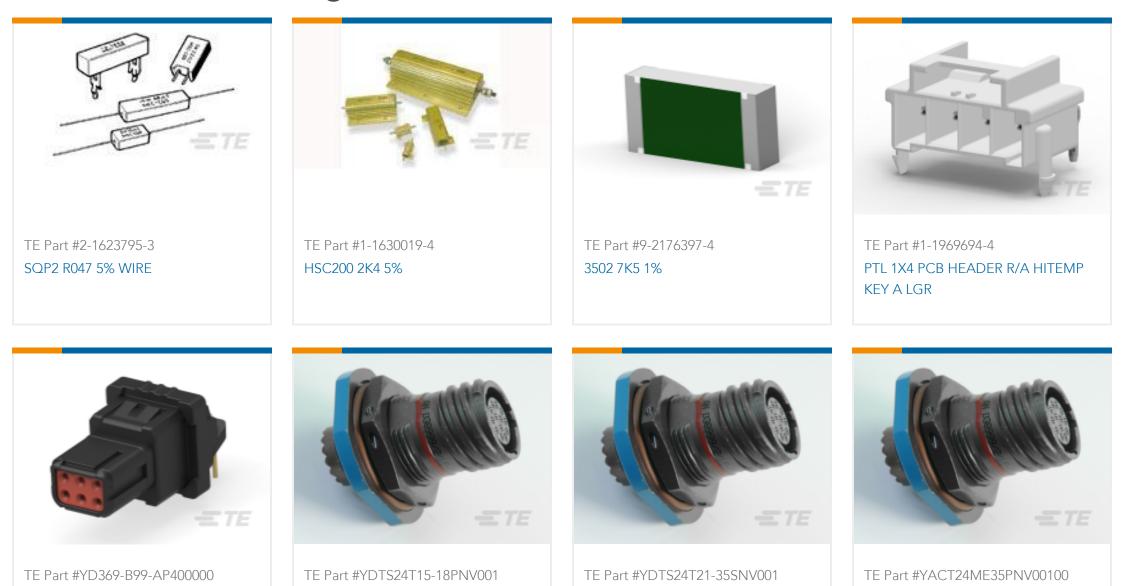

Rectangular Connectors, 9 Way Panel	RECP AS
Mount	

### Documents

Product Drawings 2.5MM SIGNAL MATE CONN HEADER

English

### CAD Files

#### 3D PDF

English

Customer View Model

ENG\_CVM\_1376478-4\_E.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_1376478-4\_E.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_1376478-4\_E.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**C** For support call+1 800 522 6752

1376478-4

2.5MM SIGNAL MATE CONN HEADER



Product Specifications Application Specification

English