1379114-2 - ACTIVE

MQS

TE Internal #: 1379114-2 PCB Mount Header, Vertical, Wire-to-Board, 12 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Tin (Sn), Through Hole - Solder, Signal, Blue, MQS

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles > SIGNAL HEADER



Connector System: Wire-to-Board

Number of Positions: **12**

Centerline (Pitch): 2.54 mm [.1 in]

Sealable: No

PCB Mount Orientation: Vertical

All SIGNAL HEADER (414)

Features

Product Type Features

Hybrid Header

No

Connector & Housing Shape

Rectangular

PCB Connector Assembly Type	PCB Mount Header					
Header Type	Fully Shrouded					
Connector System	Wire-to-Board					
Sealable	No					
Connector & Contact Terminates To	Printed Circuit Board					
Configuration Features						
Number of Sections	1					
Number of Signal Positions	12					
Number of Positions	12					
PCB Mount Orientation	Vertical					
Number of Rows	2					
Electrical Characteristics						
Nominal Voltage Architecture	12 V					
Operating Voltage	12 VDC					
Body Features						

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Wire-to-Board, 12 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Tin (Sn), Through Hole - Solder, Signal, Blue, MQS



Primary Product Color	Blue
Connector Code	2
Contact Features	
Contact Size	.63mm
Contact Type	Tab
Mating Tab Width	.63 mm[.025 in]
Mating Tab Thickness	.63 mm[.025 in]
Contact Mating Area Plating Material	Tin (Sn)
Termination Features	
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mounting Holes	Without
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	With
Panel Mount Feature	With
PCB Mount Retention	With
PCB Mount Retention Type	Boardlock
Mating Retention Type	Locking Interface
Connector Mounting Type	Panel Mount
Housing Features	
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Connector Length	40.3 mm[1.587 in]
Connector Width	17 mm[.669 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Profile Height from PCB	20.3 mm[.799 in]
Usage Conditions	
Operating Temperature (Max)	65 °C, 70 °C, 75 °C, 80 °C, 85 °C[149 °F][158 °F][167 °F][176 °F][185 °F]
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	

C For support call+1 800 522 6752

07/15/2022 07:51AM | Page 2

PCB Mount Header, Vertical, Wire-to-Board, 12 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Tin (Sn), Through Hole - Solder, Signal, Blue, MQS



Shielded	No
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Type	Tray
Packaging Quantity	648
Other	
Interface Number	208-15544
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022

(223)

Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not reviewed for solder process capability

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

PCB Mount Header, Vertical, Wire-to-Board, 12 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Tin (Sn), Through Hole - Solder, Signal, Blue, MQS






Also in the Series | MQS

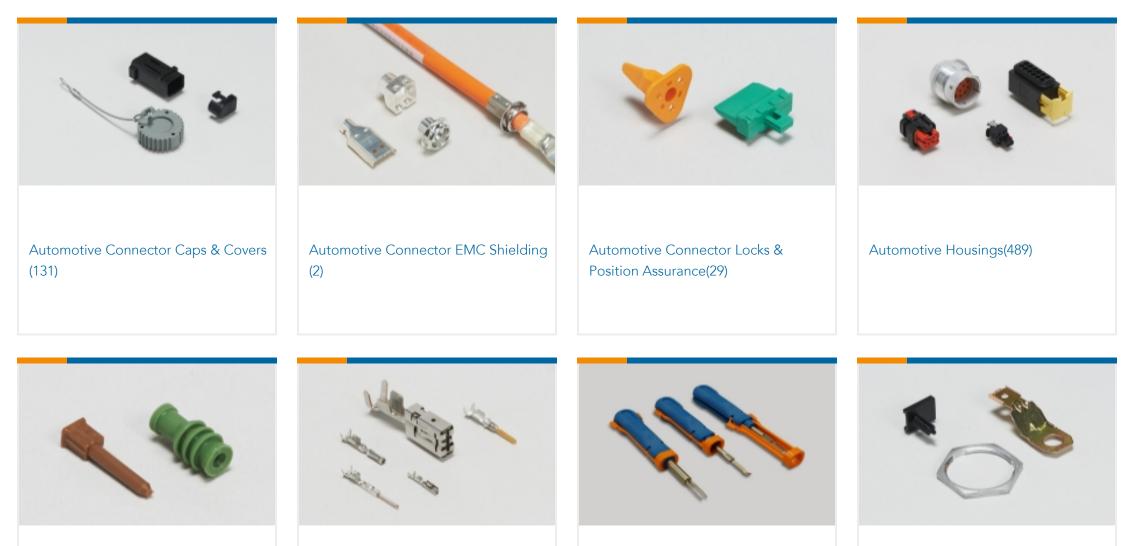

Automotive Seals & Cavity Plugs(26)	Automotive Terminals(96)	Insertion & Extraction Tools(42)	Other Automotive Connector
			Accessories(13)

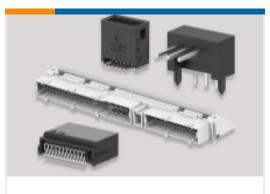

PCB Headers & Receptacles(207)

Customers Also Bought



PCB Mount Header, Vertical, Wire-to-Board, 12 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Tin (Sn), Through Hole - Solder, Signal, Blue, MQS







Documents

Product Drawings

12pos MQS .63 header 180deg

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_1379114-2_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1379114-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1379114-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Product Specification French

Product Specification

French

Product Environmental Compliance MD_1379114-2_01032017152_dmtec

English

PCB Mount Header, Vertical, Wire-to-Board, 12 Position, .1 in [2.54 mm] Centerline, Fully Shrouded, Tin (Sn), Through Hole - Solder, Signal, Blue, MQS



MD_1379114-2_01032017152_dmtec

English