

TH/.025 Connector System

TE Internal #: 1379675-5 Housing for Male Terminals, Wire-to-Wire, 12 Position, .087 in [2.2 mm] Centerline, Natural, Signal, TH/.025 Connector System View on TE.com >



Connectors > Automotive Connectors > Connector Housings > TH/.025 CONNECTOR SYSTEM, HOUSING



Connector & Housing Type: Housing for Male Terminals

Mating Tab Width: .64 mm [.025 in]

Connector System: Wire-to-Wire

Number of Positions: 12

Centerline (Pitch): 2.2 mm [.087 in]

All TH/.025 CONNECTOR SYSTEM, HOUSING (202)

Features

Product Type Features

Connector & Housing Shape	Rectangular
Connector & Housing Type	Housing for Male Terminals
Connector System	Wire-to-Wire
Sealable	No
Hybrid Connector	No
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	12
Number of Rows	2
Electrical Characteristics	
Operating Voltage	14 VDC
Nominal Voltage Architecture	12 V
Body Features	

Housing for Male Terminals, Wire-to-Wire, 12 Position, .087 in [2.2 mm] Centerline, Natural, Signal, TH/.025 Connector System



Cable Exit Angle	180°
Body Material	PBT
Primary Product Color	Natural
Connector Code	5
Contact Features	
Contact Size	.63mm
Contact Type	Tab
Mating Tab Width	.64 mm[.025 in]
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	

Centerline (Pitch)

2.2 mm[.087 in]

Dimensions

Product Width	33.9 mm[1.335 in]
Product Length	18.6 mm[.732 in]
Product Height	14.7 mm[.579 in]
Row-to-Row Spacing	3 mm[.118 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C [158 °F][167 °F][176 °F][185 °F][194 °F][212 ° F]
Operating Temperature Range	-40 - 100 °C[-40 - 212 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94HB
Other	

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 12 Position, .087 in [2.2 mm] Centerline, Natural, Signal, TH/.025 Connector System



Serviceable	Yes
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts




Also in the Series | TH/.025 Connector System

Housing for Male Terminals, Wire-to-Wire, 12 Position, .087 in [2.2 mm] Centerline, Natural, Signal, TH/.025 Connector System



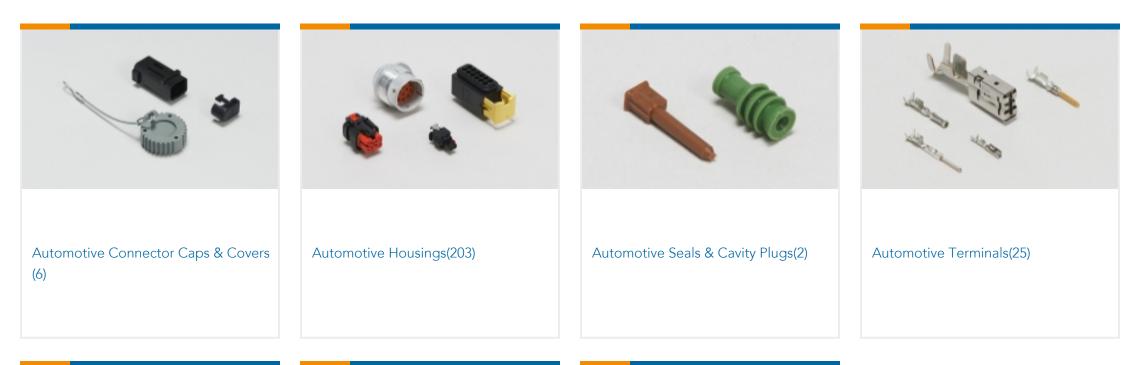

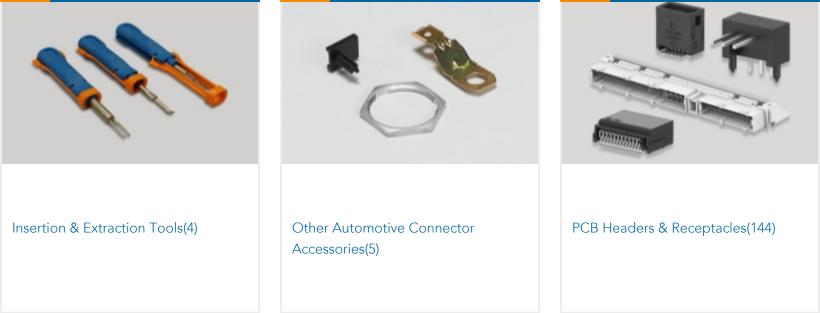

Customers Also Bought



 TE Part #281934-2
 SINGLE WIRE SEAL
 TE Part #DT04-2P
 DEUTSCH DT Series Housings & Connectors
 DEUTSCH DT WEDGELOCKS
 TE Part #0460-202-16141

 DEUTSCH DT Series Housings & Connectors
 Email Connectors
 Email Connectors
 Email Connectors
 Email Connectors

TE Part #114017-ZZ

SEALING PLUG, SIZE 12/16, WHT

Documents

Product Drawings

Customer View Model

ENG_CVM_CVM_1379675-5_A_c-1379675-5-a.2d_dxf.zip

12W TAB HSG ASSY NATURAL

TE Part #282104-1

AMP SUPERSEAL 1.5MM,

CONNECTOR HOUSING

English

3D PDF

3D

CAD Files

Housing for Male Terminals, Wire-to-Wire, 12 Position, .087 in [2.2 mm] Centerline, Natural, Signal, TH/.025 Connector System



English

Customer View Model ENG_CVM_CVM_1379675-5_A_c-1379675-5-a.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1379675-5_A_c-1379675-5-a.3d_stp.zip

English

By downloading the CAD file I accept and agree to the $\ensuremath{\mathsf{Terms}}\xspace$ and $\ensuremath{\mathsf{Conditions}}\xspace$ of use.

Datasheets & Catalog Pages

TH/.025 Connector Series

English

Product Specifications

Packaging specification for TH Tab en Plug (TH TES)

English

Product Specification

English

Instruction Sheets

Instruction Sheet (non U.S.)

English