1473565-8 - ACTIVE

RITS | RITS Header Connectors PCB Mount

TE Internal #: 1473565-8 PCB Mount Header, Vertical, Wire-to-Board, 8 Position, .078 in [2 mm] Centerline, Partially Shrouded, Gold, RITS Header Connectors PCB Mount

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles



Connector System: Wire-to-Board

Number of Positions: 8

Number of Rows: 8

Centerline (Pitch): 2 mm [.078 in]

PCB Mount Orientation: Vertical

Features

Product Type Features

Connector System	Wire-to-Board
Header Type	Partially Shrouded
Sealable	No

Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header
Configuration Features	
Number of Columns	1
Number of Loaded Positions	8
Connector Contact Load Condition	Fully Loaded
Number of Positions	8
Number of Rows	8
PCB Mount Orientation	Vertical
Electrical Characteristics	
Operating Voltage	32 VDC
Body Features	
Primary Product Color	Black
Contact Features	
Contact Layout	In-line

PCB Mount Header, Vertical, Wire-to-Board, 8 Position, .078 in [2 mm] Centerline, Partially Shrouded, Gold, RITS Header Connectors PCB Mount



PCB Contact Termination Area Plating Material Thickness	2 μm[78.74 μin]
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Mating Area Plating Material Thickness	.2 μm[7.87 μin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material Finish	Bright
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold
Contact Type	Receptacle
Contact Current Rating (Max)	3 A
Termination Features	
Rectangular Termination Post & Tail Thickness	.2 mm[.007 in]
Rectangular Termination Post & Tail Width	.6 mm[.023 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mating Alignment Type	Polarization
Mating Retention	Without
Connector Mounting Type	Board Mount

Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	Without
Housing Features	
Housing Material	Thermoplastic
Centerline (Pitch)	2 mm[.078 in]
Dimensions	
Connector Length	23.8 mm[.937 in]
Connector Height	13 mm[.511 in]
Connector Width	6.4 mm[.251 in]
Usage Conditions	
Operating Temperature Range	-30 – 75 °C[-22 – 167 °F]
Operation/Application	
Circuit Application	Signal

PCB Mount Header, Vertical, Wire-to-Board, 8 Position, .078 in [2 mm] Centerline, Partially Shrouded, Gold, RITS Header Connectors PCB Mount



Industry Standards

UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Type	Tube

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

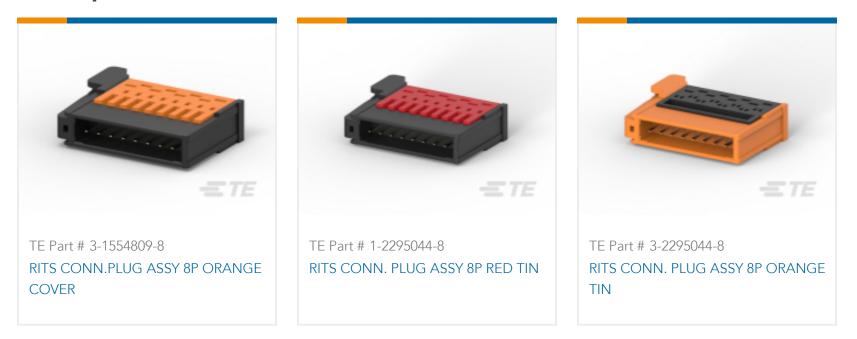

PCB Mount Header, Vertical, Wire-to-Board, 8 Position, .078 in [2 mm] Centerline, Partially Shrouded, Gold, RITS Header Connectors PCB Mount



Also in the Series | RITS Header Connectors PCB Mount



Customers Also Bought



TE Part #1-1827581-3 DYNAMIC 1500T HDR ASSY V 9P X BLACK GOLD



TE Part #1-1827875-3 Header Assembly: Wire-to-Board, 5A, gold or tin plated



TE Part #1473567-3 RITS CONN.HDR ASSY 4ROW 3P



TE Part #1-1827872-3 Header Assembly: Wire-to-Board, 3A, gold or Tin plated



Documents

Product Drawings RITS CONN.HDR ASSY 8P

Japanese

CAD Files

3D PDF

English

Customer View Model ENG_CVM_1473565-8_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_1473565-8_B.3d_igs.zip

English

Customer View Model

ENG_CVM_1473565-8_B.3d_stp.zip

PCB Mount Header, Vertical, Wire-to-Board, 8 Position, .078 in [2 mm] Centerline, Partially Shrouded, Gold, RITS Header Connectors PCB Mount



English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Remote Input Output Terminal System (RITS) Connectors

English

Product Specifications Standard Operating Procedure

Japanese

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Instruction Sheets

Instruction Sheet (non U.S.)

Japanese

RITS Connector Interconnection System/e-CON Connector

Japanese