FASTIN-FASTON | FASTIN-FASTON 197

TE Internal #: 144839-2

Quick Disconnects, Tab, 17 – 13 AWG Wire Size, 1.03 – 2.62 mm²

Wire Size, Mating Tab Width .2 in [5.08 mm], Straight, Brass,

FASTIN-FASTON 197

View on TE.com >



Terminals & Splices > Quick Disconnects











Quick Disconnect Terminal Type: Tab

Wire Size: 1.03 – 2.62 mm²

Mating Tab Width: 5.08 mm [.2 in]

Mating Tab Thickness: .81 mm [.032 in]

Features

Product Type Features

Terminates To	Wire & Cable
Wire Stop	No
Wire/Cable Type	Regular Wire
Sealable	No

Configuration Features

Connection Capacity	Single
Contact Features	
Quick Disconnect Terminal Type	Tab
Mating Tab Width	5.08 mm[.2 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp

Open

Barrel Type



Mechanical Attachment

Mating Retention Type	Hole
Wire Insulation Support	With

Dimensions

Accepts Wire Insulation Diameter Range	2.1 – 3.1 mm[.082 – .122 in]
Overall Length	26.7 mm[1.05 in]
Receptacle Terminal Stock Thickness	.41 mm[.016 in]
Wire Size	1.03 – 2.62 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]

Industry Standards

UL Rating	Recognized	

Packaging Features

Packaging Quantity	2500
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach


Compatible Parts







Also in the Series | FASTIN-FASTON 197

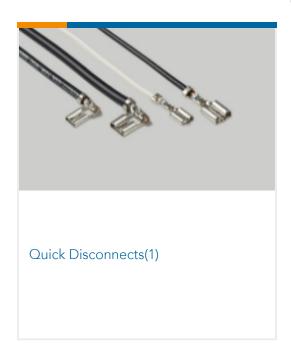

Customers Also Bought

















Documents

Product Drawings

FF 5MM TAB 17-12 AWG .031 PTPB

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_144839-2_G.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_144839-2_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_144839-2_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Product Specifications

Application Specification

English

SERTISSAGE DE LA LANGUETTE DE 5 A DOUBLE VERROUILLAGE SUR MACHINE AUTOMATIQUE

English