




Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

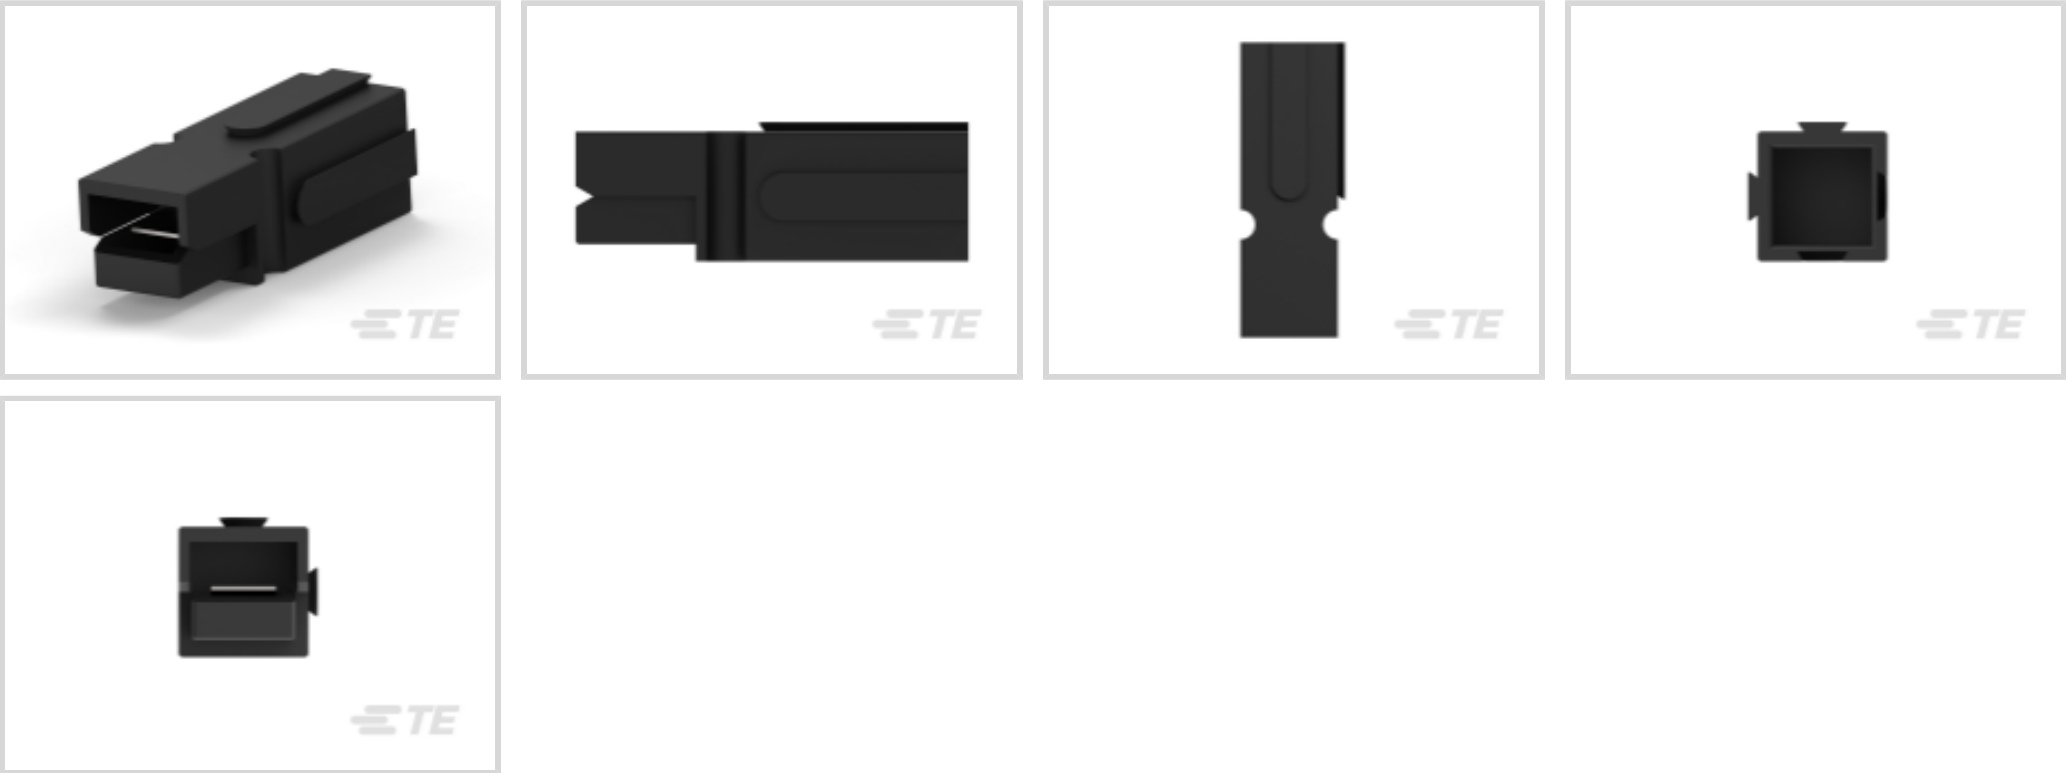

Rectangular Power Connector Type: **Housing**
Connector & Housing Type: **Plug, Receptacle**
Connector System: **Wire-to-Wire**
Number of Positions: **1**
Sealable: **No**

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug, Receptacle
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	1
Number of Rows	1

Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------

Contact Features

Contact Retention Within Housing	Without
Contact Type	Blade

Termination Features

--	--



Termination Method to Wire & Cable	Crimp
Wire/Cable Type	Discrete Wire
Wire Type	Stranded

Mechanical Attachment

Panel Mount Feature	Without
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Color	Black
Housing Material	Polycarbonate

Dimensions

Wire Size	25656 – 27629 CMA
Height	17.15 mm[.675 in]
Length	48 mm[1.89 in]
Width	17.15 mm[.675 in]

Usage Conditions

Operating Temperature Range	-20 – 105 °C[-4 – 221 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire
UL Rating	Recognized
Agency/Standard Number	E28476
Agency/Standard	UL

Packaging Features

Packaging Method	Bag
Packaging Quantity	300

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant



China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




Also in the Series | AMP Power Series - 75



Customers Also Bought

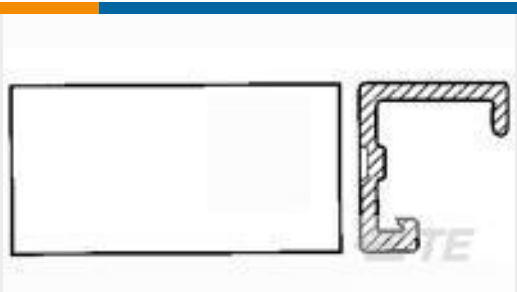

TE Part #1-640550-0
10P MTA100 COVER

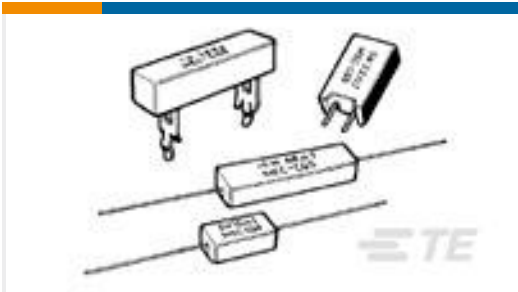

TE Part #1-1623783-3
SQM7 47K 2% (METAL FILM)



TE Part #3-643817-3
03P MTA156 CONN ASSY 18AWG ORA



TE Part #3-643817-4
04P MTA156 CONN ASSY 18AWG ORA



TE Part #1-770901-0
MINI UMNL PIN 26-22 AWG AU LF



TE Part #172343-1
MINI UNIVERSAL M-N-L HOUSING



TE Part #1-770902-0
MINI UMNL SOK 26-22 AWG AU



TE Part #60465-1
250 FASTON TAB BR



TE Part #1546310-6
6P .563" DR BARRIER STRIP



TE Part #2238173-3
250 FASTON,REC.,22-12 AWG,TPBR

Documents

Product Drawings

75A HSG SUBASY BLACK

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1445715-2_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1445715-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1445715-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



POWER_CONNECTORS_CATALOG_SEC02_CABLE_MOUNTED

English

2_PIECE_POWER_CONNECTORS_qrg_4-1773458-1

English

Product Specifications

Application Specification

English

Product Environmental Compliance

MD_1445715-2_110720161158_dmtec

English

MD_1445715-2_110720161158_dmtec

English