


## Z-PACK | Z-PACK HM-Zd

TE Internal #: 1469001-1 High Speed Backplane Connectors, Board-to-Board, 80 Position, Mating Alignment, Polarization Mating Alignment Type, 8 Row, 10 Column, Z-PACK HM-Zd

## View on TE.com >

Connectors > PCB Connectors > Backplane Connectors > High Speed Connectors

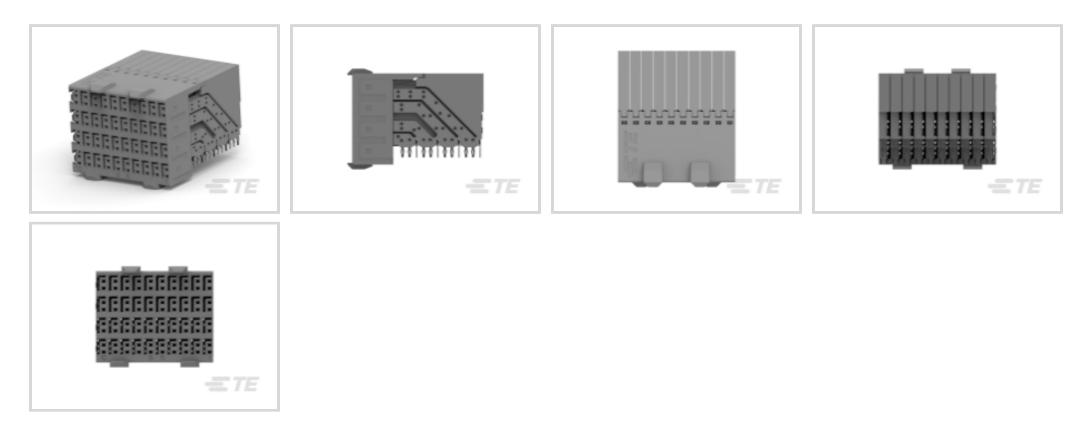



Number of Positions: **80** Row-to-Row Spacing: **1.5 mm [.059 in ]** 

Connector System: Board-to-Board

Mating Alignment: With

Mating Alignment Type: Polarization

## Features

## Product Type Features

Connector System	Board-to-Board
PCB Connector Assembly Type	PCB Mount Receptacle
Shroud Style	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Pairs per Column	4
Number of Ground Positions	40
Card Slot Centerline	25.4 mm[1 in]
Number of Pairs	40
Number of Signal Positions	80
Number of Positions	80
Number of Rows	8
Number of Columns	10

High Speed Backplane Connectors, Board-to-Board, 80 Position, Mating Alignment, Polarization Mating Alignment Type, 8 Row, 10 Column, Z-PACK HM-Zd



PCB Mount Orientation	Right Angle
Guide Location	Unguided
Electrical Characteristics	
Operating Voltage	250 VAC
Signal Characteristics	
Data Rate	≤12 Gb/s
Body Features	
Shield Material	Phosphor Bronze
Contact Features	
Contact Layout	Matrix
Contact Type	Receptacle
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Contact Mating Area Plating Material	Gold
Contact Base Material	Copper Nickel Silicon
Contact Current Rating (Max)	.7 A
Termination Features	
Termination Post & Tail Length	2.2 mm[.086 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Mechanical Attachment	
Mating Alignment	With
Mating Alignment Type	Polarization
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Polyester - GF
Housing Color	Gray
Centerline (Pitch)	2.5 mm[.098 in]
Dimensions	
Connector Length	24.9 mm[.98 in]
Connector Height	19.35 mm[.761 in]
Connector Width	27.9 mm[1.098 in]
Row-to-Row Spacing	1.5 mm[.059 in]

## Usage Conditions

**C** For support call+1 800 522 6752

High Speed Backplane Connectors, Board-to-Board, 80 Position, Mating Alignment, Polarization Mating Alignment Type, 8 Row, 10 Column, Z-PACK HM-Zd



Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Tube
-	
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Not Compliant
For compliance documentation, visit the product page on TE.com>	Not Compliant Not Compliant
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	

### Halogen Content

### Solder Process Capability

Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Not applicable for solder process capability


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**

High Speed Backplane Connectors, Board-to-Board, 80 Position, Mating Alignment, Polarization Mating Alignment Type, 8 Row, 10 Column, Z-PACK HM-Zd



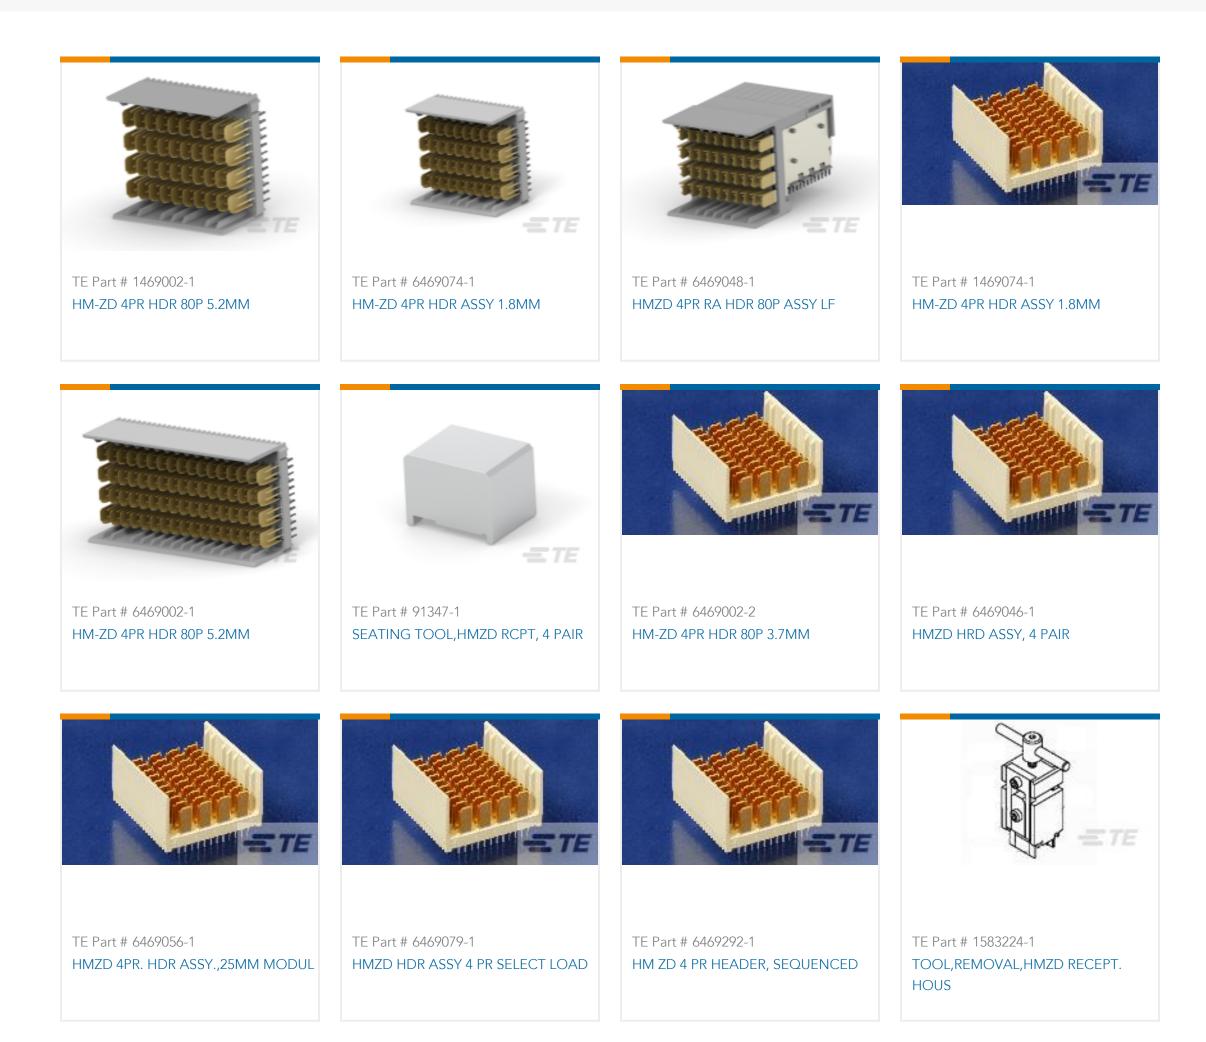



# Also in the Series Z-PACK HM-Zd




# Customers Also Bought

**&** For support call+1 800 522 6752

High Speed Backplane Connectors, Board-to-Board, 80 Position, Mating Alignment, Polarization Mating Alignment Type, 8 Row, 10 Column, Z-PACK HM-Zd



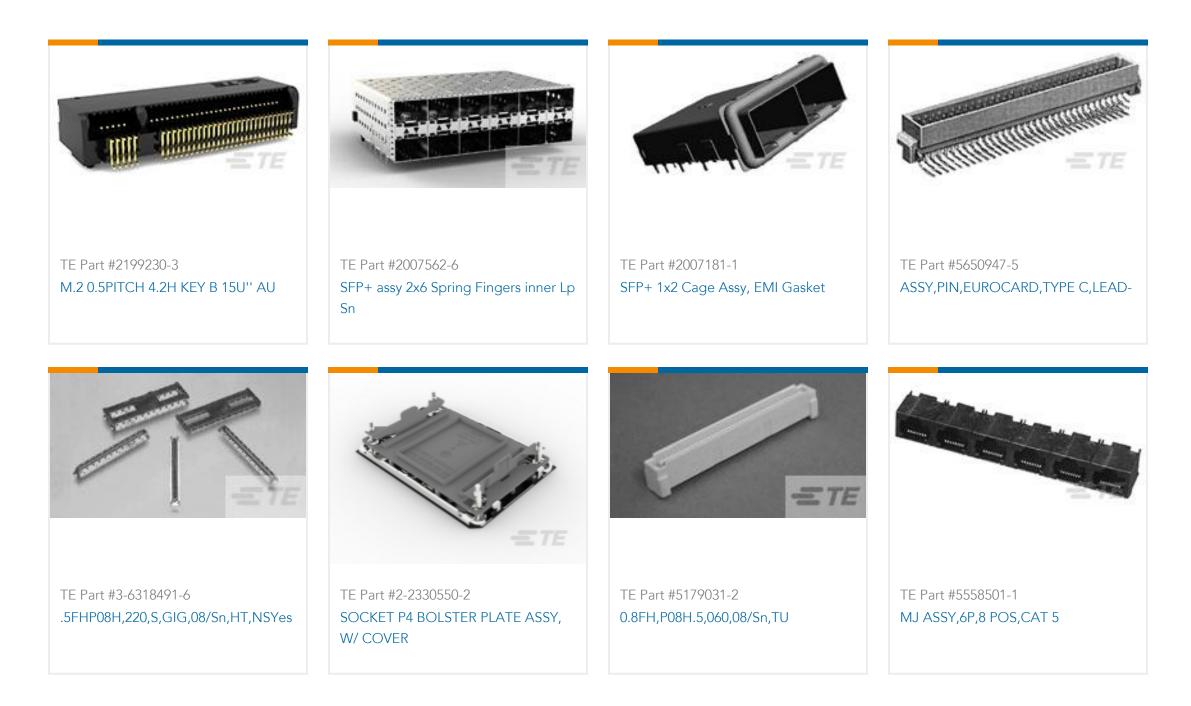

## Documents

Product Drawings HM-ZD 4PR RECP 80P

English

CAD Files 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_1469001-1\_H.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1469001-1\_H.3d\_igs.zip

English

Customer View Model

```
ENG_CVM_CVM_1469001-1_H.3d_stp.zip
```

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Product Environmental Compliance MD\_1469001-1\_072620171220\_dmtec

English

MD\_1469001-1\_072620171220\_dmtec

English

High Speed Backplane Connectors, Board-to-Board, 80 Position, Mating Alignment, Polarization Mating Alignment Type, 8 Row, 10 Column, Z-PACK HM-Zd



Instruction Sheets EXTRACTION TOOL FOR HM-Zd CONN.(REC)(TOOL P/N: 1596027-1)

English

Instruction Sheet (non U.S.)

English