



Positive Lock | Positive Lock 250

TE Internal #: 160759-3

Quick Disconnects, Receptacle, 20 – 15 AWG Wire Size, .51 – 1.65 mm² Wire Size, Mating Tab Width .25 in [6.35 mm], Straight, Brass, Positive Lock 250

[View on TE.com >](#)

Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: .51 – 1.65 mm²

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

Features

Product Type Features

Terminates To	Wire & Cable
Wire/Cable Type	Regular Wire
Wire Stop	No
Insertion Force	Low
Sealable	No

Configuration Features

Connection Capacity	Single
---------------------	--------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp



Barrel Type	Open
-------------	------

Mechanical Attachment

Mating Retention Type	Dimple
Extraction Force	7 – 100 Newton
Wire Insulation Support	With

Dimensions

Accepts Wire Insulation Diameter Range	2.3 – 3.3 mm [.09 – .13 in]
Receptacle Terminal Stock Thickness	.41 mm [.016 in]
Overall Length	22.3 mm [.88 in]
Wire Size	.51 – 1.65 mm ²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C [-40 – 230 °F]

Industry Standards

UL Rating	Recognized
-----------	------------

Packaging Features

Packaging Quantity	5100
Packaging Method	Strip/Reel

Other

Comment	FLK-Wire: Normal Wire
---------	-----------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2305570-1
TERMINAL CUTTER, SIDE FEED



TE Part # 654174-1
POS.LOCK HANDTOOL



TE Part # 626581-1
PL 250 REC 0.5-1.5 MM2 0.35X 26.54 BR



TE Part # 2-2151182-2
OCEAN_2.0_APPLICATOR-S-090F130F



TE Part # 2-2836571-2
OCEAN_2.0_APPLICATOR-S-090F130OV



TE Part # 2-953615-2
MODULAR RELAY HLDR 50-60A



TE Part # 2151182-2
OCEAN_2.0_APPLICATOR-S-090F130F



TE Part # 282435-2
MODULAR RELAY HOUSING



TE Part # 2836571-2
OCEAN_2.0_APPLICATOR-S-090F130OV



TE Part # 5-2151182-2
OCEAN_2.0_APPLICATOR-S-090F130F



TE Part # 626581-2
POSITIVE LOCK REC. MKII 250 S.



TE Part # 7-2151182-2
OCEAN_2.0_APPLICATOR-S-090F130F



KIT

REPRESENTATION ONLY

TE Part # 7-2151182-7
OCEAN_2.0_SPARE_PART_KIT-090F130F



TE Part # 7-2836571-2
OCEAN_2.0_Applicator-S-090F130OV



KIT

REPRESENTATION ONLY

TE Part # 7-2836571-7
OCEAN_2.0_SPARE_PART_KIT-090F130OV



TE Part # 281988-3
5POS MODULAR CONN FOR MICRO RE



TE Part # 1-953615-1
MODULAR RELAY HLDR 50-60A



TE Part # 1-953615-2
MODULAR RELAY HLDR 50-60A




TE Part # 2-953615-1
MODULAR RELAY HLDR 50-60A




TE Part # 953615-1
MODULAR RELAY HLDR 50-60A


Also in the Series | Positive Lock 250

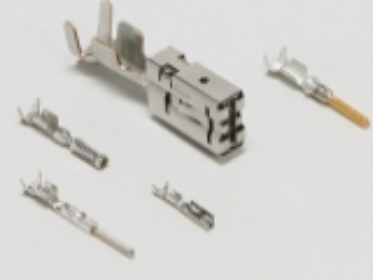

Automotive Terminals(1)




Crimp Terminal Housings(203)



Insertion & Extraction Tools(3)




Insulation Boots & Sleeves(4)



Quick Disconnects(189)

Customers Also Bought

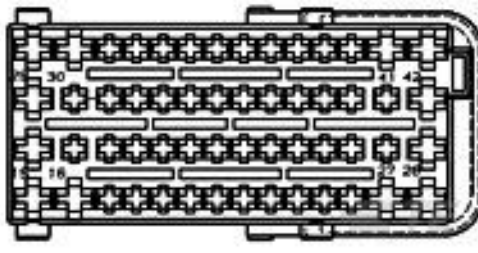

TE Part #1-962299-1
56P JPT/MPT BU-GEH



TE Part #929941-3
JPT REC 2.8 Contact SWS Sn



TE Part #2-1703930-2
NANOMQS, RECEPTACLE TERMINAL



TE Part #62895-1
MAG-MATE POKE-IN TAB 018 TPBR



Documents

Product Drawings

[250 PL MKI REC. 20-15AWG TPBR](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_160759-3_AM.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_160759-3_AM.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_160759-3_AM.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[1654742_HOUSEHOLD_APPLIANCES_RAST5](#)

English

Product Specifications

[Application Specification](#)

English

Product Environmental Compliance

[MD_160759-3_06052018836_dmtec](#)

160759-3

Quick Disconnects, Receptacle, 20 – 15 AWG Wire Size, .51 – 1.65 mm² Wire Size,
Mating Tab Width .25 in [6.35 mm], Straight, Brass, Positive Lock 250



English

[MD_160759-3_06052018836_dmtec](#)

English