

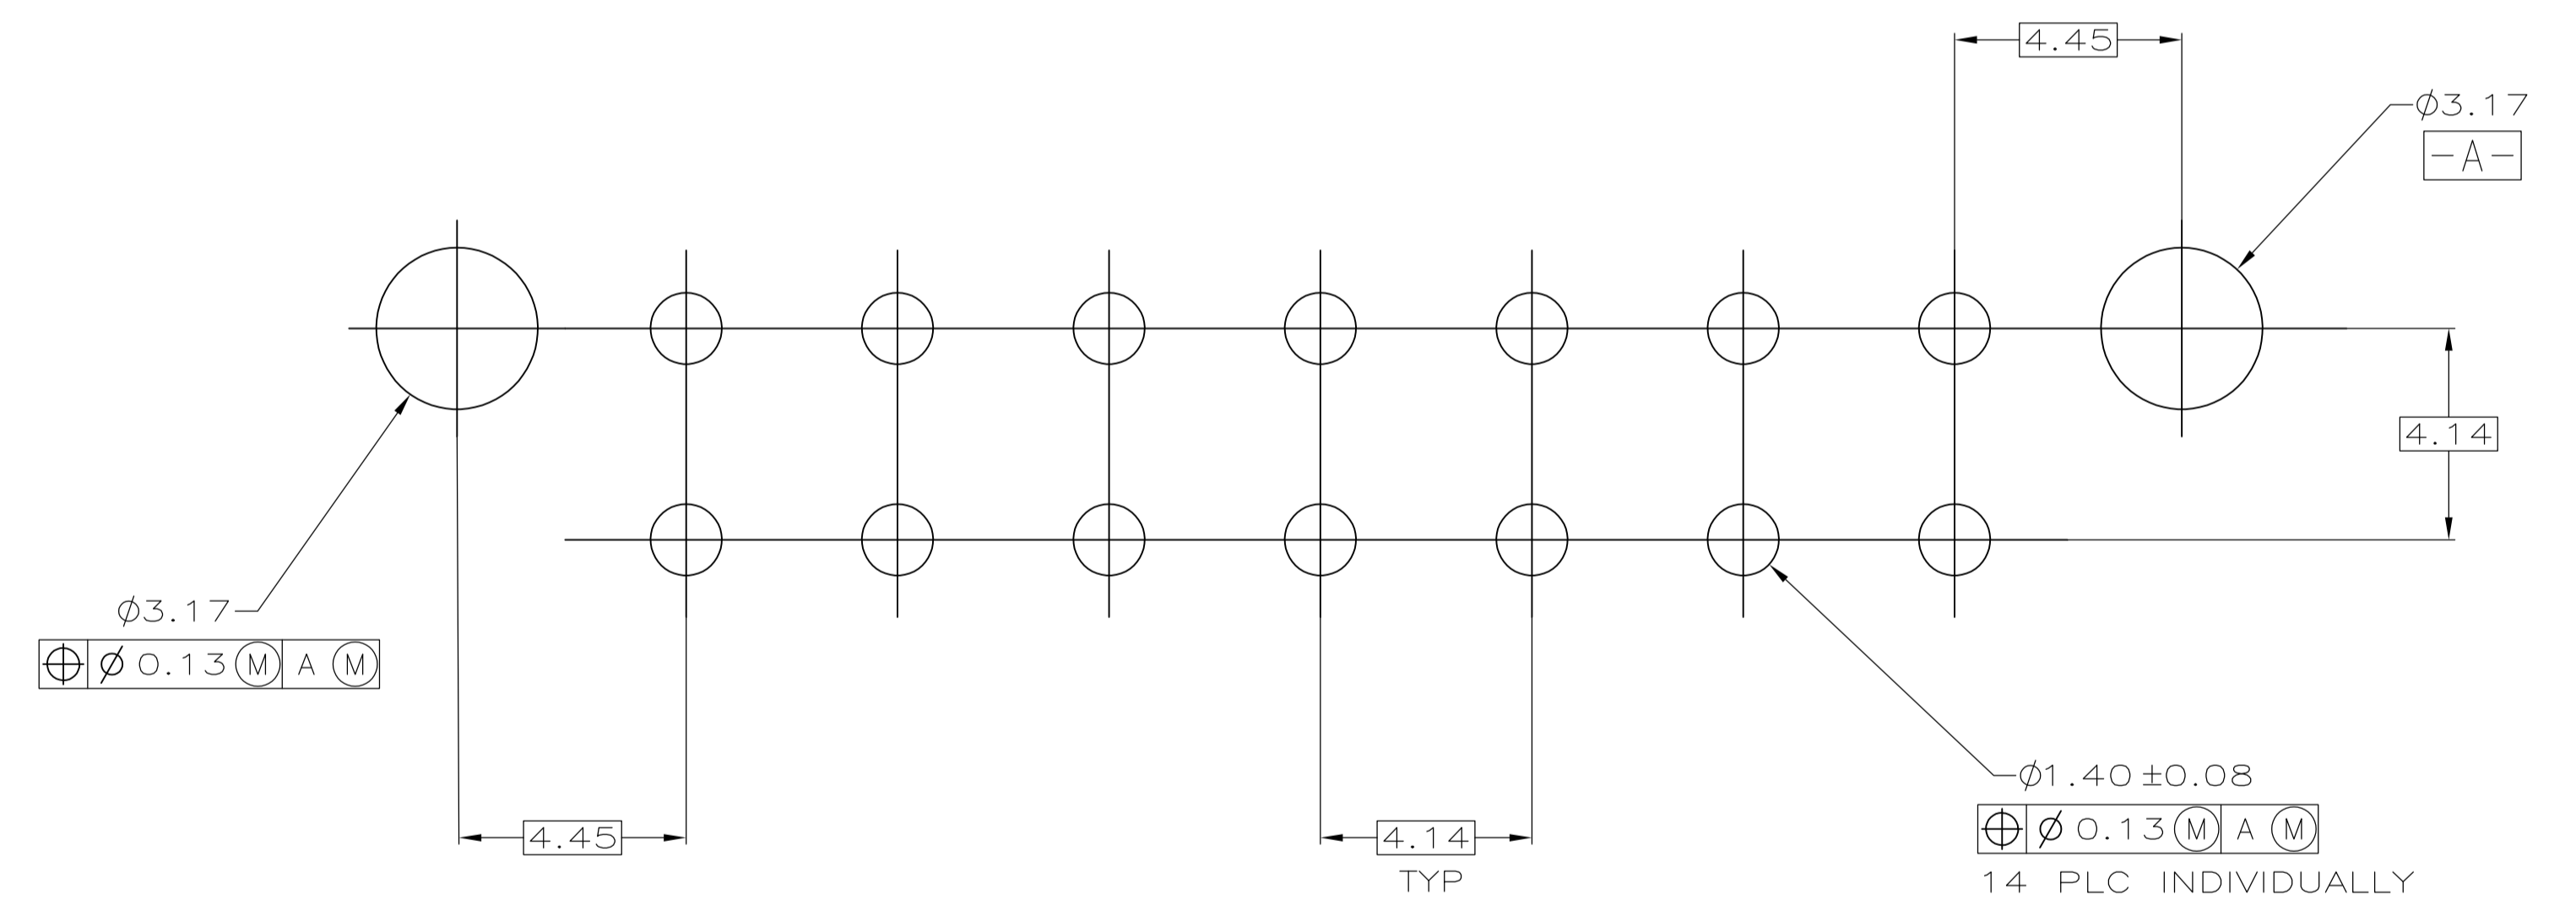


1. PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 109-11-3.
2. 0.00381 MIN MATTE TIN OVER
0.00127 MIN NICKEL.
3. MATES WITH PART P/N 1586592-1.
4. 0.00076 MIN GOLD PLATE IN THE LOCALIZED GOLD PLATE AREA 0.00381 MIN MATTE TIN IN THE LOCALIZED TIN PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

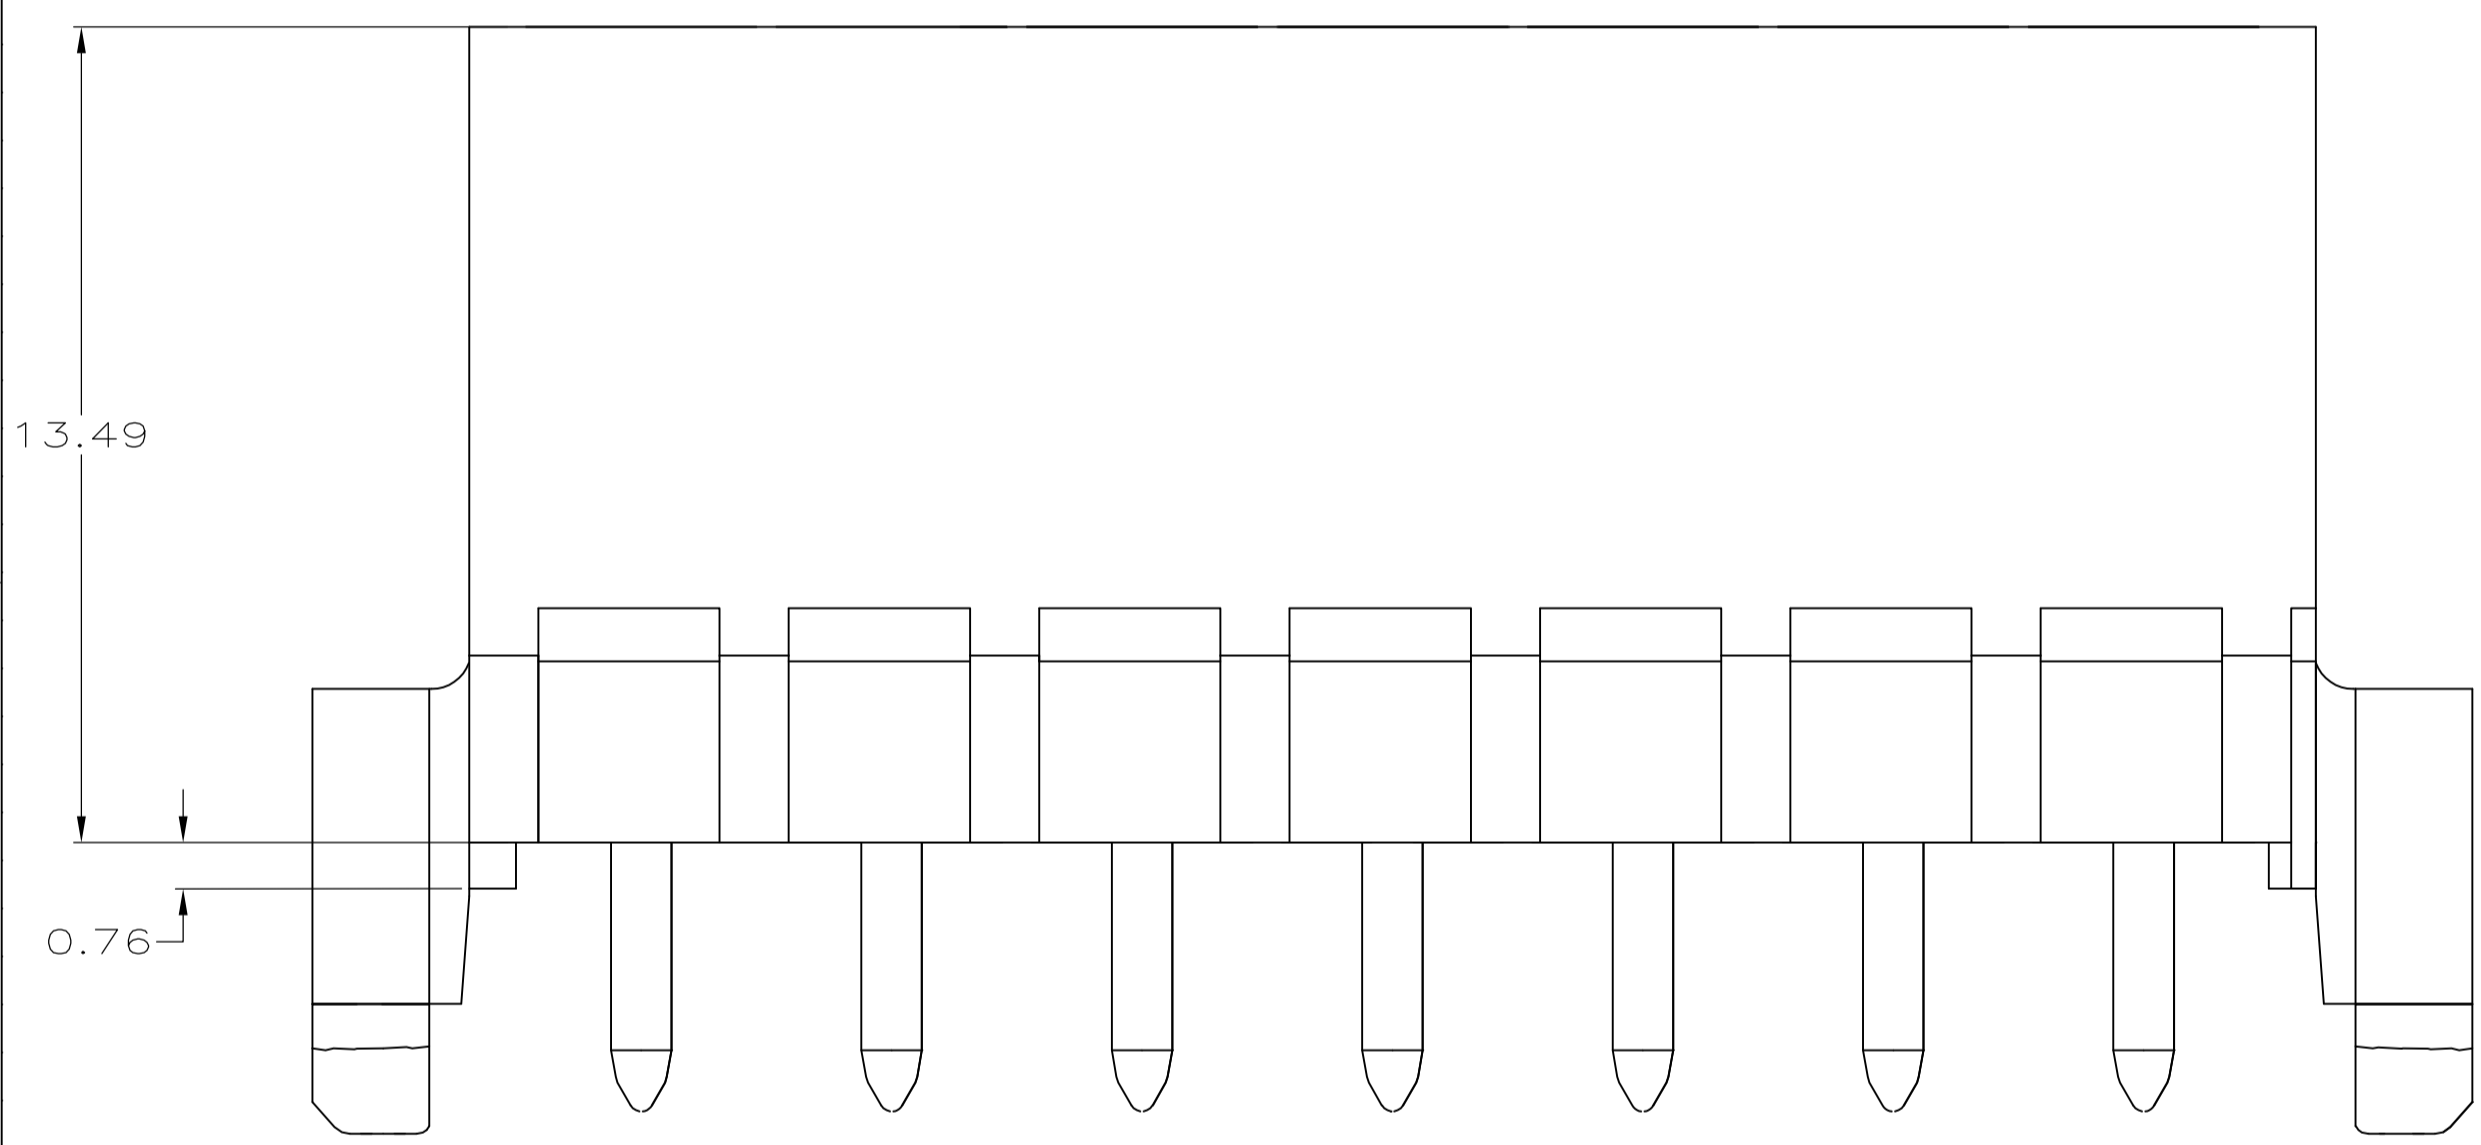

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 THICK P.C. BOARD

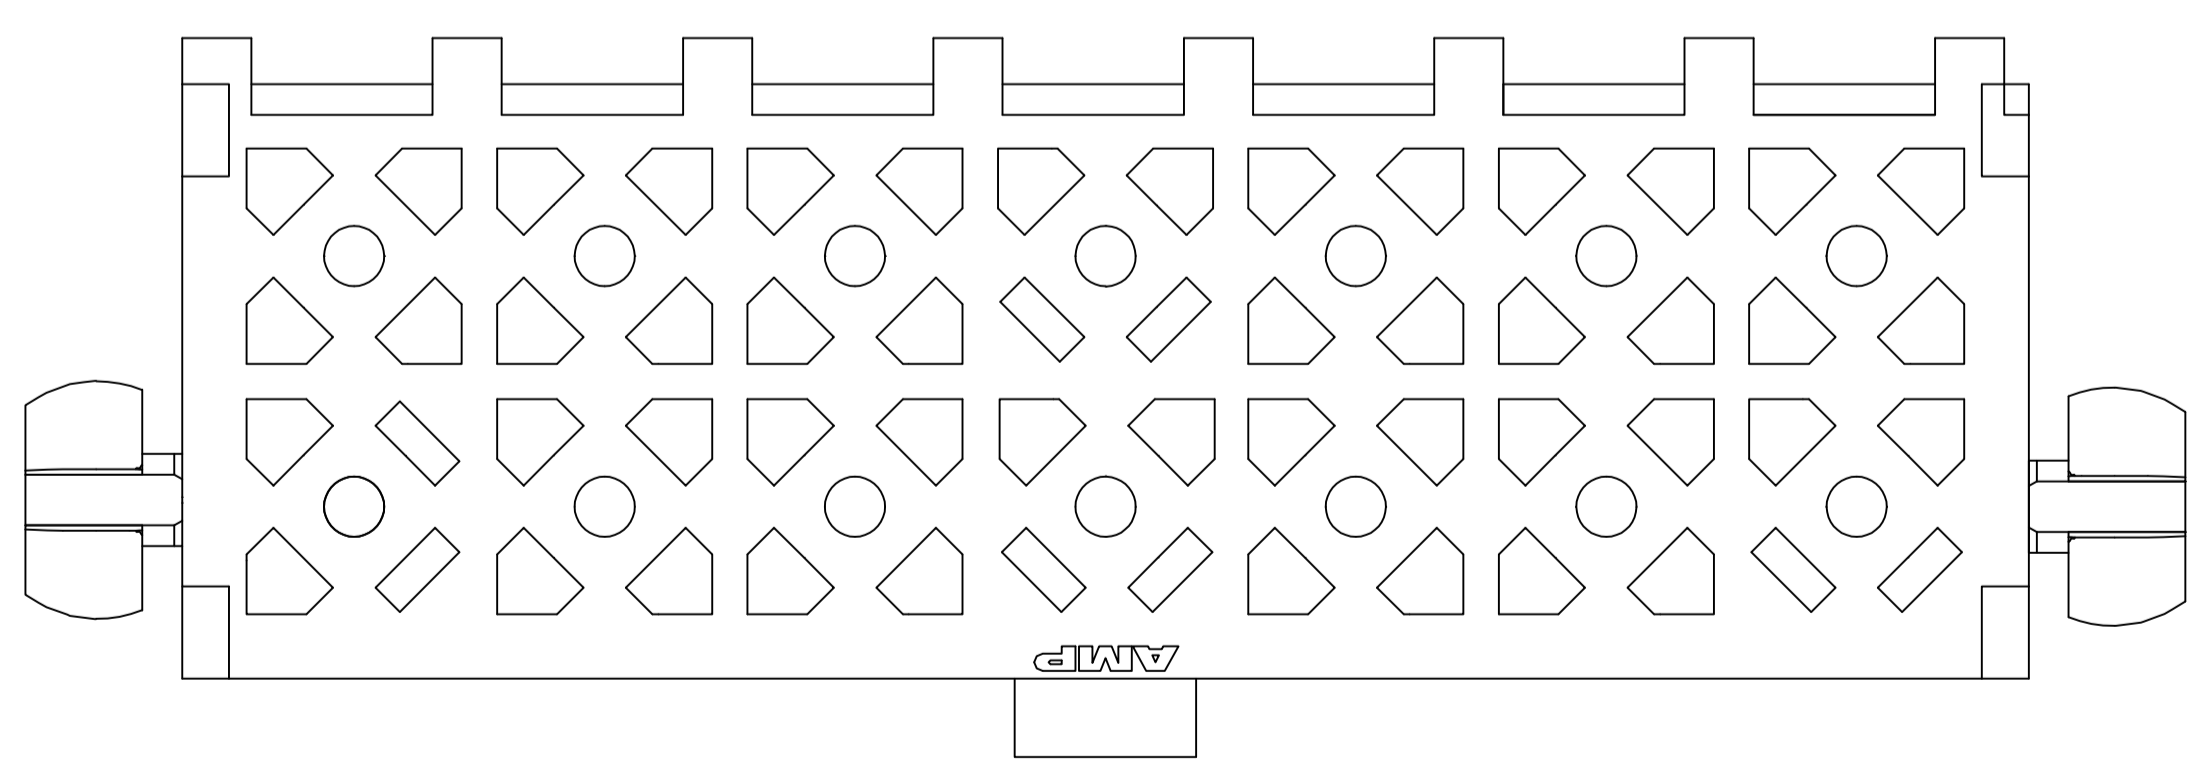

BRASS, TIN Δ	NYLON, 94V-0, WHITE	1586600-2
BRASS, TIN Δ	NYLON, 94V-0, WHITE	1586600-1
PIN CONTACT MATERIAL AND FINISH		HOUSING MATERIAL AND COLOR
		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN K. WHITAKER 08APR2005	TE Connectivity
DIMENSIONS: mm		CHK C. JONES 08APR2005	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. JONES 08APR2005	NAME
0. PLC	±	PRODUCT SPEC	HEADER ASSEMBLY, 14 CIRCUIT, DOUBLE ROW VERTICAL, SPECIAL KEYING, MINI-UNIVERSAL MATE-N-LOK(TM)
1. PLC	±	APPLICATION SPEC	
2. PLC	± 0.13	SIZE	
3. PLC	±	SCALE	
4. PLC	±	WEIGHT	RESTRICTED TO
ANGLES	±	SEE TABLE	A1 00779 C=1586600
MATERIAL SEE TABLE		FINISH SEE TABLE	CUSTOMER DRAWING
		SCALE	NA
		SHEET	1 OF 1
		REV	B1