

product: DELPHI PN 15344631

material: STOL76

**VERSION I**

surface: SN

material thickness: 0,38 mm

cross section [mm<sup>2</sup>]: 4,0 | 6,0

strip length: 5,50 mm

cable type: FLRY-B

insulation ø [mm]: 3,40 - 4,30

seal: DPN 15324994 (4,0)  
DPN 15324996

**Uncontrolled  
Copy**  
For Information only!


conductor dimension					crimp dimension [mm]					
cable type	cross sect. [mm <sup>2</sup> ]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation			
					height ± 0,05	width ± 0,10	height ± 0,10	width ± 0,10	height ± tol.	width ± tol.
FLRY-B	4,0	56 x 0,31	3,55	350	2,10	4,05	6,80	6,75		
FLRY-B	6,0	84 x 0,31	4,15	500	2,40	4,10	6,90	6,75		

core:  
C-4.00-4.5-19  
DPN 10713074

insulation:  
IS-6.30-3.5-19  
DPN 10713790

anvil:  
ASR-4.00-6.30-10.3-3.9-1.6  
DPN 10714018

two piece anvil:

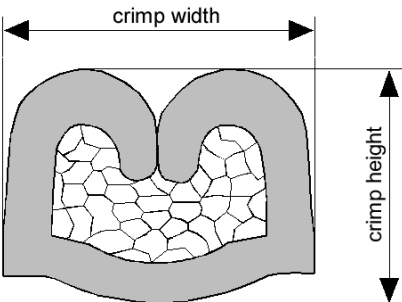


DELPHI PN 15344631



cable:  
4,00 mm<sup>2</sup> = 56 x 0,31 mm

crimp height:  
2,10 mm

crimp width:  
4,05 mm

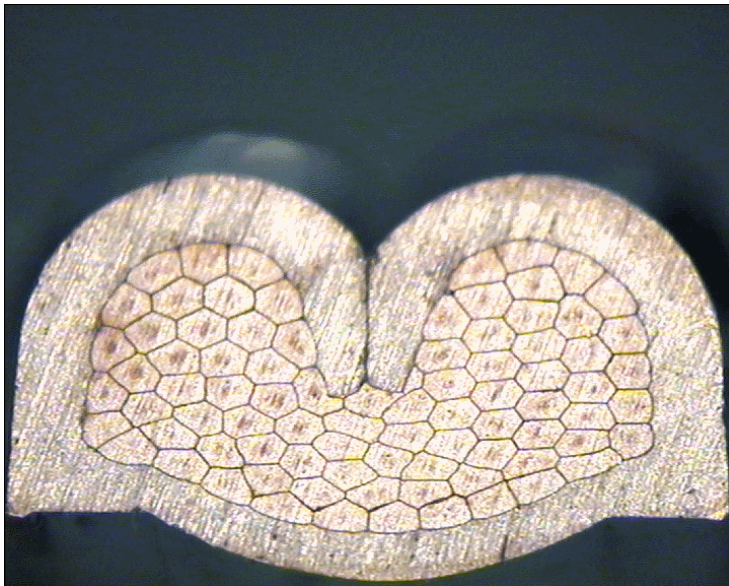

cable:  
6,00 mm<sup>2</sup> = 84 x 0,31 mm

crimp height:  
2,40 mm

crimp width:  
4,10 mm