

product: DELPHI PN 15492978  
 material: CUNI3SI1MG  
 surface: F.SN  
 material thickness: 0,30 mm  
 cross section [mm<sup>2</sup>]: 0,35 | 0,5  
 strip length: 4,00 mm  
 cable type: FLRY-A  
 insulation  $\varnothing$  [mm]: 1,20 - 1,60  
 seal:

**Uncontrolled  
Copy**  
For Information only!


conductor dimension					crimp dimension [mm]					
cable type	cross sect. [mm <sup>2</sup> ]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation			
					height $\pm 0,03$	width $\pm 0,10$	height $\pm 0,10$	width $\pm 0,10$	height $\pm$ tol.	width $\pm$ tol.
FLRY-A	0,35	7 x 0,26	1,25	50	1,10	1,70	1,80	1,95		
FLRY-A	0,5	19 x 0,19	1,50	80	1,20	1,70	1,95	2,00		

core:  
C-1.60-3.0-10  
DPN 10713736


insulation:  
IS-2.00-3.0-12  
DPN 10713819

anvil:

two piece anvil:  
AC-1.60-3.25  
DPN 10764051  
AI-2.00-3.6-0.2-A  
DPN 10803789

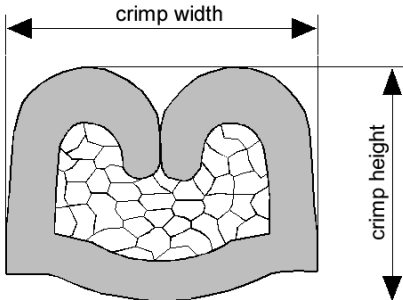


DELPHI PN 15492978

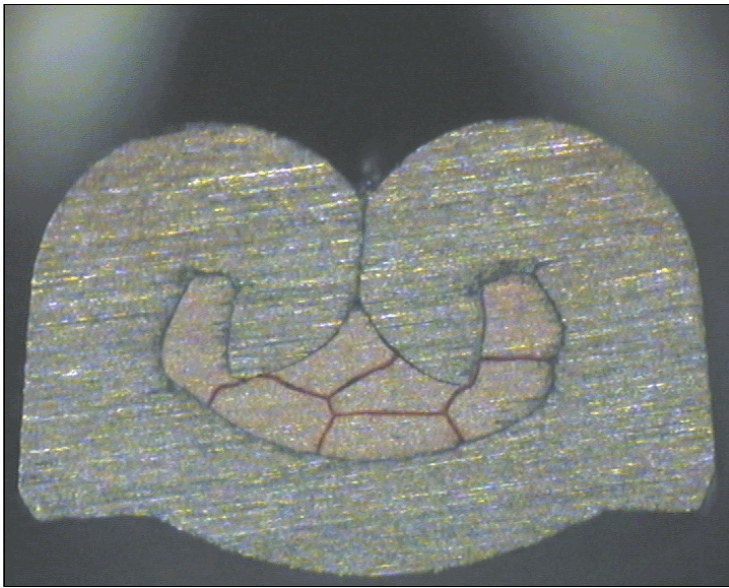

cable:  
 $0,35 \text{ mm}^2 = 7 \times 0,26 \text{ mm}$

crimp height:  
1,10 mm

crimp width:  
1,70 mm

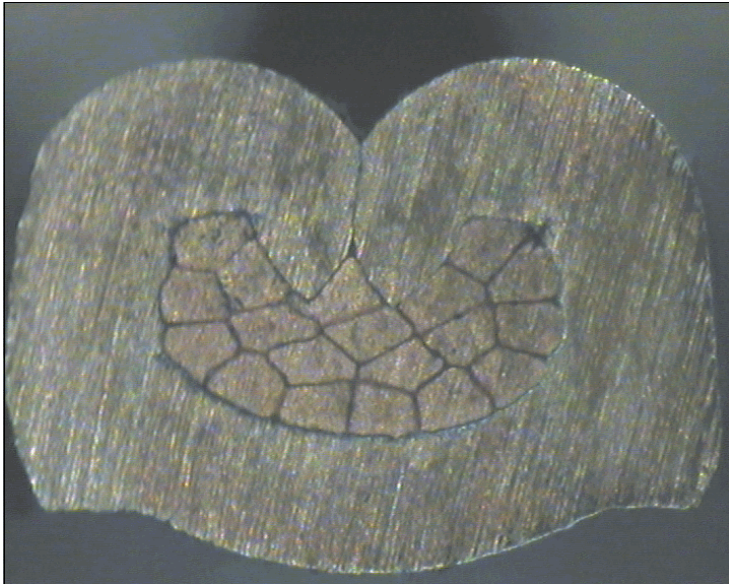

cable:  
 $0,50 \text{ mm}^2 = 19 \times 0,19 \text{ mm}$

crimp height:  
1,20 mm

crimp width:  
1,70 mm