

GRACE INERTIA 3.5

TE Internal #: 1565082-1 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 3 Position, .138 in [3.5 mm] Centerline, Wire & Cable, UL 94V-0, GRACE INERTIA 3.5

View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > STD Temp GRACE INERTIA Plug



Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 3

Centerline (Pitch): 3.5 mm [.138 in]

All STD Temp GRACE INERTIA Plug (25)

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	3
Keying	A
Number of Power Positions	0
Number of Signal Positions	0
Number of Rows	1

Electrical Characteristics

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 3 Position, .138 in [3.5 mm] Centerline, Wire & Cable, UL 94V-0, GRACE INERTIA 3.5



Operating Voltage	300 VAC	
Contact Features		
Contact Layout	Inline	
Contact Base Material	Copper Alloy	
Contact Retention Within Housing	Without	
Contact Type	Receptacle	
Termination Features		
Termination Method to Wire & Cable	Crimp	
Mechanical Attachment		
Strain Relief	Without	
Mating Alignment Type	Keyed	
Mating Alignment	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Mating Retention	With	
Mating Retention Type	Inertia Locking, Latch	
Housing Features		

Housing Color	Natural	
Housing Material	Nylon 66	
Dimensions		
	.49 in	
Usage Conditions		
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]	
Operation/Application		
Circuit Application	Power & Signal	
Industry Standards		
UL Flammability Rating	UL 94V-0	
Glow Wire Rating	Standard Part - Not Glow Wire	
Packaging Features		
Packaging Method	Bag	
Packaging Quantity	400	

3.5 mm[.138 in]

Centerline (Pitch)

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 3 Position, .138 in [3.5 mm] Centerline, Wire & Cable, UL 94V-0, GRACE INERTIA 3.5



Other

For Use With

Cap Housing

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not applicable for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 3 Position, .138 in [3.5 mm] Centerline, Wire & Cable, UL 94V-0, GRACE INERTIA 3.5





TE Part # 1729279-1 EXTRACTION TOOL FOR GIC 3.5 CONN.

Also in the Series | GRACE INERTIA 3.5

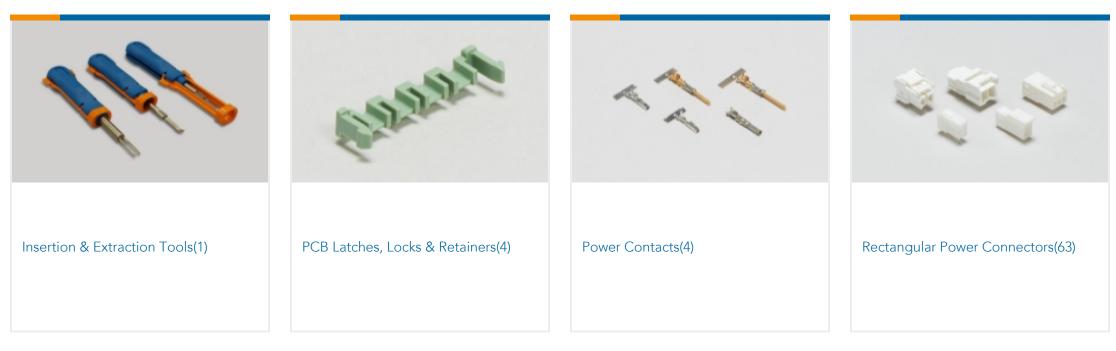

Customers Also Bought



		= TE	
TE Part #900318-1 PL 312 FLAG REC 20-18AWG 0.32X24. 9 PTPBR	TE Part #900319-1 PL 312 FLAG REC 20-18AWG 0.32X24. 9 PTPBR	TE Part #1565088-1 STD Temp GRACE INERTIA Cap	TE Part #1376478-5 2.5MM SIGNAL MATE CONN HEADER



Documents

Product Drawings GRACE INERTIA CONNECTOR 3.5 3P

English

CAD Files

3D PDF

3D

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 3 Position, .138 in [3.5 mm] Centerline, Wire & Cable, UL 94V-0, GRACE INERTIA 3.5



Customer View Model

ENG_CVM_CVM_1565082-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1565082-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1565082-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

1-1773883-5 GRACE INERTIA connector quick reference guide

English

Product Specifications

Product Specification

English

Product Environmental Compliance MD_1565082-1_070120142222_dmtec

English

MD_1565082-1_070120142222_dmtec

English

Instruction Sheets

Extraction Tool for GIC 3.5 Conn.

Japanese

Instruction Sheet (non U.S.)

Japanese

Agency Approvals UL Report

English