

product: DELPHI PN 15344633
 material: CUZN9SN3
 surface: SN
 material thickness: 0,40 mm
 cross section [mm²]: 4,0 | 6,0

 strip length: 5,60 mm
 cable type: FLRY-B
 insulation \varnothing [mm]: 3,40 - 4,30
 seal:

**Uncontrolled
Copy**
For Information only!


conductor dimension					crimp dimension [mm]					
cable type	cross sect. [mm ²]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation			
					height $\pm 0,05$	width $\pm 0,10$	height $\pm 0,10$	width $\pm 0,10$	height \pm tol.	width \pm tol.
FLRY-B	4,0	56 x 0,31	3,55	350	2,30	4,10	4,20	5,15		
FLRY-B	6,0	84 x 0,31	4,15	500	2,60	4,15	4,50	5,35		

core:
 C-4.00-4.5-19
 DPN 10713074


insulation:
 I-5.00-3.5-19
 DPN 10713861

anvil:
 AS-4.00-5.00-9.0-3.8-0.4
 DPN 10714213

two piece anvil:
 AC-4.00-4.75
 DPN 10764194
 AI-5.00-4.0-0.4
 DPN 10806935

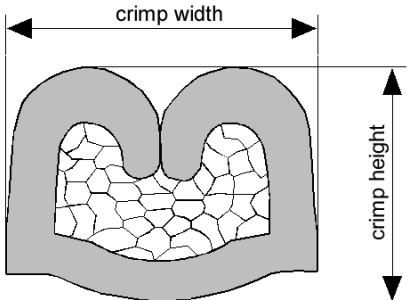


DELPHI PN 15344633

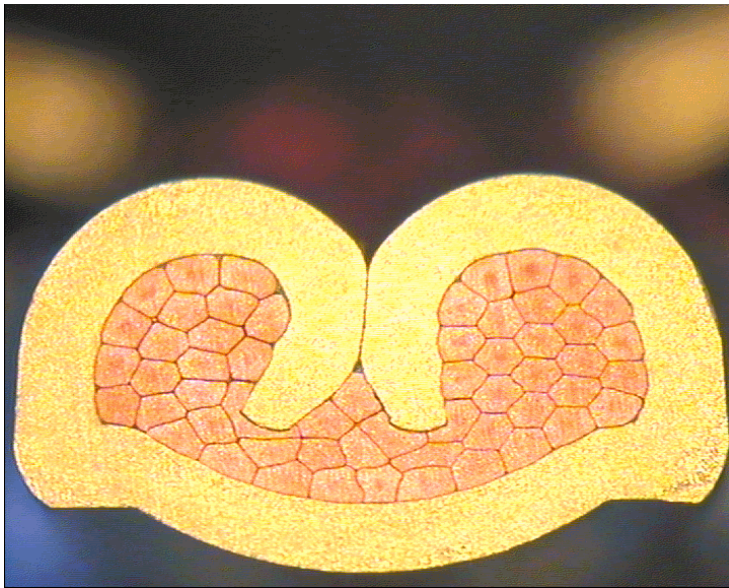

cable:
4,00 mm² = 56 x 0,31 mm

crimp height:
2,30 mm

crimp width:
4,10 mm

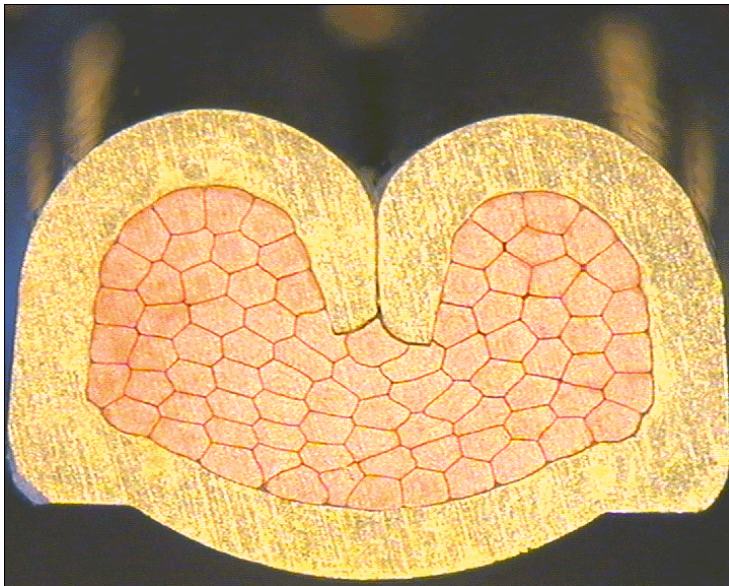

cable:
6,00 mm² = 84 x 0,31 mm

crimp height:
2,60 mm

crimp width:
4,15 mm