

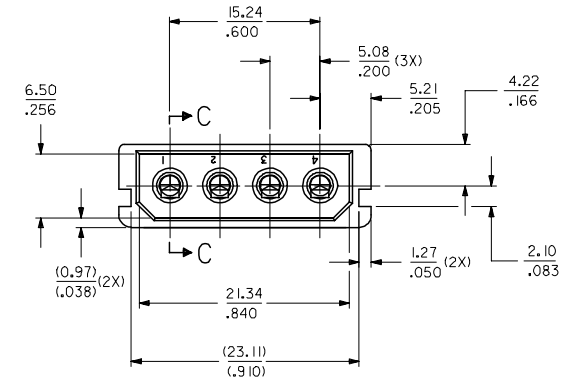


SECTION C - C

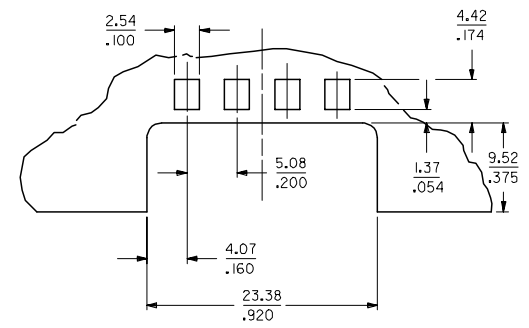

RECOMMENDED P.C.BOARD LAYOUT



NOTES:

1. MOLDED RIBS TO PROVIDE AN INTERFERENCE FIT TO A 1.62± 0.10/(.064±.004) P.C. BOARD
2. PLATING
POSTPLATE 0.00254/(.000100) MIN. TIN OVER 0.00127/(.000050) MIN. NICKEL OVERALL.
3. PART INTENDED TO MATE WITH HOUSING 8981-4P2 AND TERMINAL 8980-3*.
4. PRODUCT SPEC. PS-8981-4SM* APPLIES.
5. MATERIAL:
HOUSING - PET, GLASS FILLED, UL94V-0, COLOR: BLACK
TERMINAL - PHOSPHOR BRONZE

OBS TIN/LEAD P/N EC NO: S2006-0763 DRWN:MLG 2006/03/31 CHKD:NAGESHN 2006/03/31 APPR:PTLIM 2006/04/03	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			4 PLACES 3 PLACES 2 PLACES 1 PLACE ANGULAR ± 3 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	mm	INCH	DRAWN BY CK	DATE 1989/09/30	TITLE POWER CONNECTOR, 4 CKTS SMT	MOLEX MOLEX INCORPORATED	DOCUMENT NO. SDA-8981-4SM1	SHEET NO. 1 OF 1
				± ---	± ---	CHECKED BY	DATE				
				± ---	± .008	TAY	1989/09/30				
				± 0.20	± ---	APPROVED BY	DATE				
				± ---	± ---	NK	1989/09/30				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							