163087-1 ✓ ACTIVE

AMP | AMP Type III+

TE Internal #: 163087-1

Power Contacts, Contact, Tin, 24 – 20 AWG Wire Size, .2 – .5 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Socket, AMP Type ...

|||+

View on TE.com >



Connectors > Power Connectors > Power Contacts > TYPE III CONTACTS STRIP EMEA











Power Contact Type: Contact

Contact Mating Area Plating Material: Tin

Wire Size: .2 – .5 mm²

Connector & Contact Terminates To: Wire & Cable

All TYPE III CONTACTS STRIP EMEA (9)

Features

Product Type Features

Power Contact Type	Contact
Connector & Contact Terminates To	Wire & Cable
Electrical Characteristics	
Test Current	13 A
Contact Features	
Contact Mating Area Plating Material	Tin
Contact Current Rating (Max)	13 A
Contact Type	Socket
Contact Retention Within Housing	With
Mating Pin Diameter	1.57 mm[.062 in]
Contact Base Material	Brass
Contact Mating Area Plating Material Thickness	2.03 μm[80 μin]
Contact Mating Area Plating Material Finish	Bright



Wire Contact Termination Area Plating Thickness	2.03 µm[80 µin]
Wire Contact Termination Area Plating Material	Tin
Wire Contact Termination Area Plating Material Finish	Bright
Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Size	16
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	$.25 \text{ mm}^2$
vvire size	
Accepts Wire Insulation Diameter Range	1.1 – 1.8 mm[.045 – .07 in]
Accepts Wire Insulation Diameter Range	
Accepts Wire Insulation Diameter Range Usage Conditions	1.1 – 1.8 mm[.045 – .07 in]
Accepts Wire Insulation Diameter Range Usage Conditions Operating Temperature Range	1.1 – 1.8 mm[.045 – .07 in]
Accepts Wire Insulation Diameter Range Usage Conditions Operating Temperature Range Operation/Application	1.1 – 1.8 mm[.045 – .07 in] -55 – 90 °C[-67 – 194 °F]
Accepts Wire Insulation Diameter Range Usage Conditions Operating Temperature Range Operation/Application Circuit Application	1.1 – 1.8 mm[.045 – .07 in] -55 – 90 °C[-67 – 194 °F]
Accepts Wire Insulation Diameter Range Usage Conditions Operating Temperature Range Operation/Application Circuit Application Industry Standards	1.1 – 1.8 mm[.045 – .07 in] -55 – 90 °C[-67 – 194 °F] Power & Signal
Accepts Wire Insulation Diameter Range Usage Conditions Operating Temperature Range Operation/Application Circuit Application Industry Standards Agency/Standard	1.1 – 1.8 mm[.045 – .07 in] -55 – 90 °C[-67 – 194 °F] Power & Signal UL
Accepts Wire Insulation Diameter Range Usage Conditions Operating Temperature Range Operation/Application Circuit Application Industry Standards Agency/Standard UL File Number	1.1 – 1.8 mm[.045 – .07 in] -55 – 90 °C[-67 – 194 °F] Power & Signal UL
Accepts Wire Insulation Diameter Range Usage Conditions Operating Temperature Range Operation/Application Circuit Application Industry Standards Agency/Standard UL File Number Packaging Features	1.1 – 1.8 mm[.045 – .07 in] -55 – 90 °C[-67 – 194 °F] Power & Signal UL E28476
Accepts Wire Insulation Diameter Range Usage Conditions Operating Temperature Range Operation/Application Circuit Application Industry Standards Agency/Standard UL File Number Packaging Features Packaging Method	1.1 – 1.8 mm[.045 – .07 in] -55 – 90 °C[-67 – 194 °F] Power & Signal UL E28476 Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold



EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts























Also in the Series | AMP Type III+

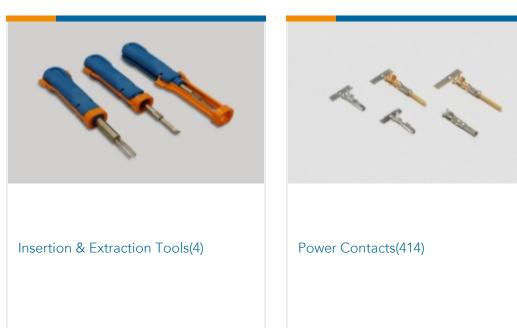

Customers Also Bought

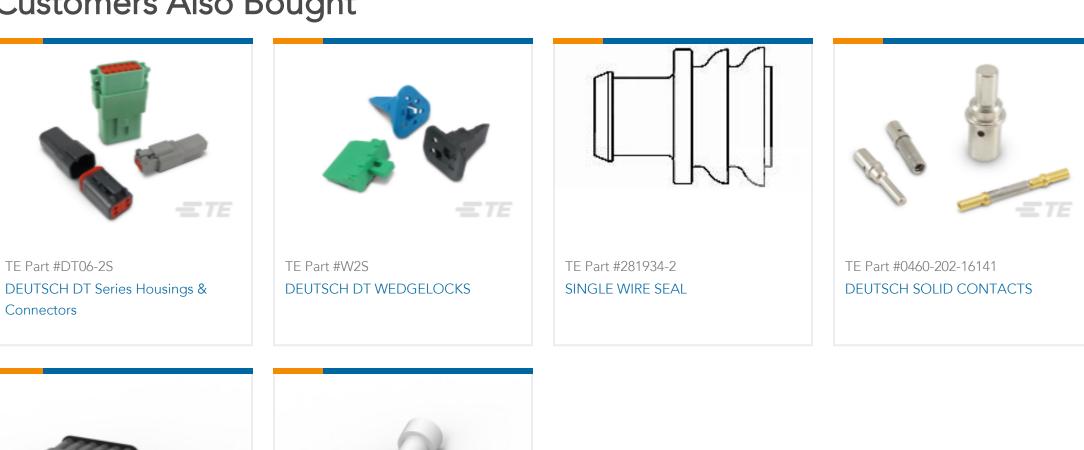

=TE

TE Part #114017-ZZ

SEALING PLUG, SIZE 12/16, WHT

Documents

TE Part #282104-1

AMP SUPERSEAL 1.5MM,

CONNECTOR HOUSING

Product Drawings .062 DIA SOC.ASS.3+

English

CAD Files

3D PDF

English



Customer View Model

ENG_CVM_163087-1_AD.2d_dxf.zip

English

Customer View Model

ENG_CVM_163087-1_AD.3d_igs.zip

English

Customer View Model

ENG_CVM_163087-1_AD.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Product Specification

English