




Terminals & Splices > Quick Disconnects

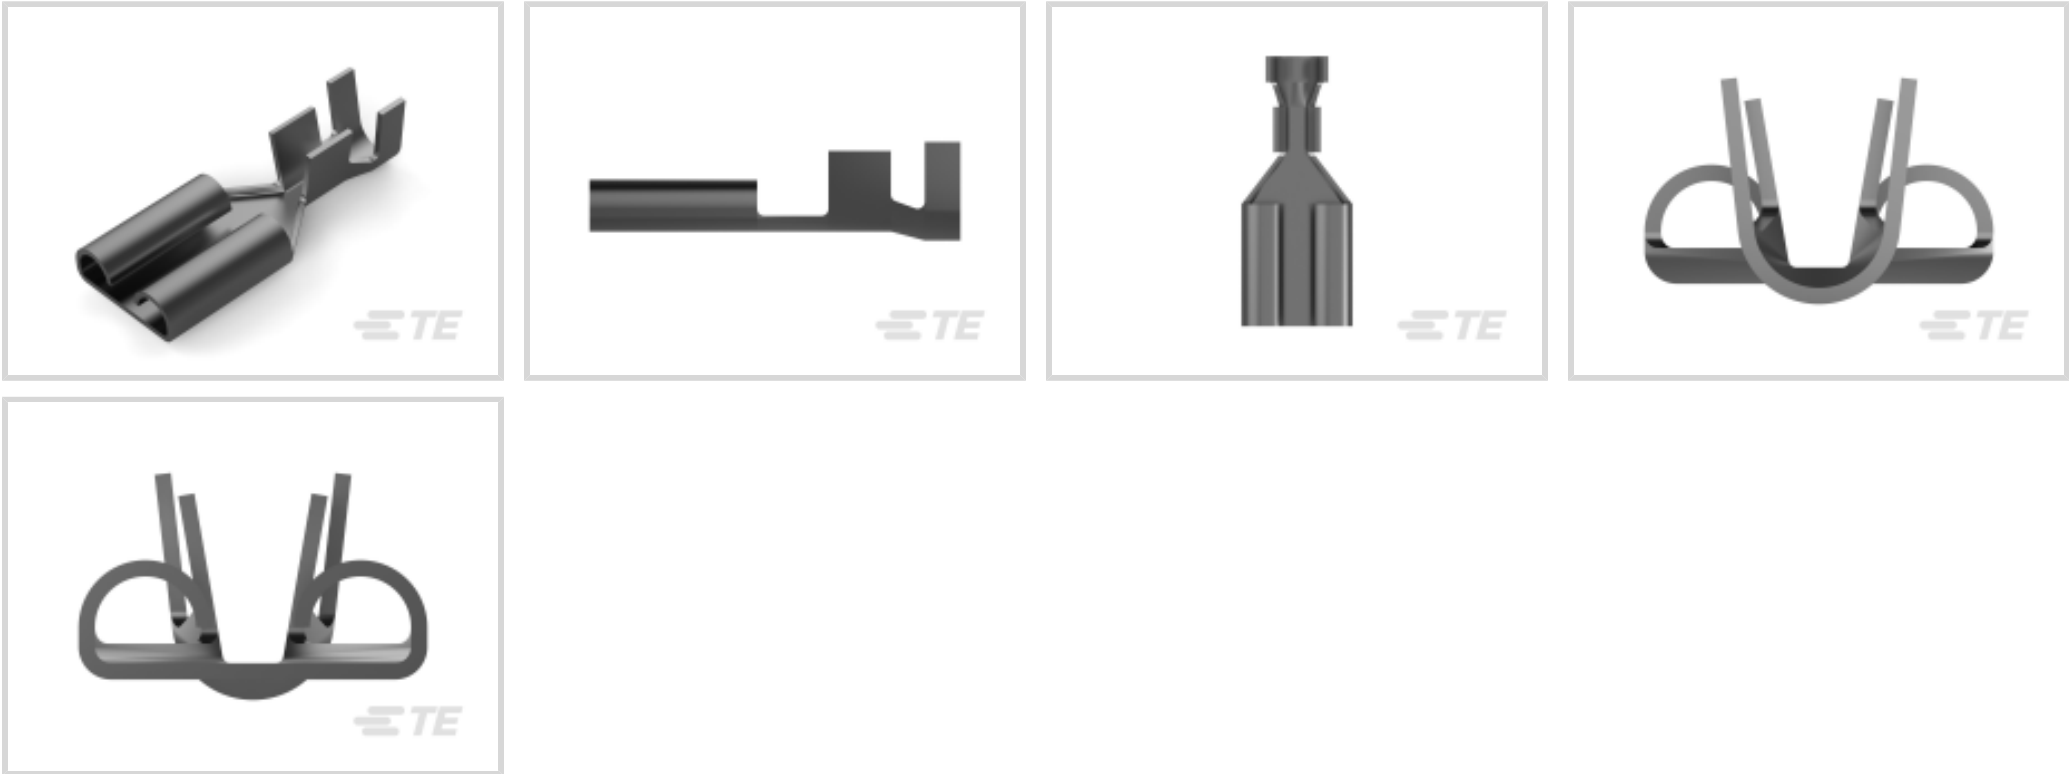

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **2.08 – 5.26 mm²**

Mating Tab Width: **9.53 mm [ .375 in ]**

Mating Tab Thickness: **1.22 mm [ .048 in ]**

Features

Product Type Features

Terminates To	Wire & Cable
Wire Stop	No
Wire/Cable Type	Regular Wire
Insertion Force	Normal
Sealable	No

Configuration Features

Connection Capacity	Single
---------------------	--------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	9.53 mm[.375 in]
Mating Tab Thickness	1.22 mm[.048 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp



Barrel Type	Open
Mechanical Attachment	
Mating Retention Type	Dimple
Wire Insulation Support	With
Dimensions	
Accepts Wire Insulation Diameter Range	4.06 – 5.33 mm[.16 – .21 in]
Overall Length	26.42 mm[1.04 in]
Receptacle Terminal Stock Thickness	.51 mm[.02 in]
Wire Size	2.08 – 5.26 mm²
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]
Industry Standards	
UL Rating	Listed
CSA Certified	Yes
Packaging Features	
Packaging Quantity	2000
Packaging Method	Strip/Reel
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 154897-1  
.375 FLAG FASTON RECPT.

TE Part # 154897-2  
.375 FLAG FASTON RECPT.

TE Part # 5-160521-2  
375 FASTON REC 12-10 AWG TPBR

TE Part # 150530-3  
FASTON 375 AM REC 2-6MM2 0.2X1.062 NPBR

TE Part # 2-2150785-2  
OCEAN-2.0-APPLICATOR-E-155F210F

TE Part # 2150785-2  
OCEAN-2.0-APPLICATOR-E-155F210F

TE Part # 7-2150785-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-155F210F

Also in the Series | FASTON 375


Crimp Terminal Housings(2)

PCB Terminals(1)


Quick Disconnects(12)

Customers Also Bought







TE Part #280756-2  
FF 375 REC 3-6MM2 TPBR




TE Part #61988-1  
250 FASTON REC 22-18 AWG BR




TE Part #1-2232263-1  
PTL 1X2 CAP PANEL MT HOT WIRE  
KEY A BLK



TE Part #1-1376390-5  
Glow Wire Power Key Plug

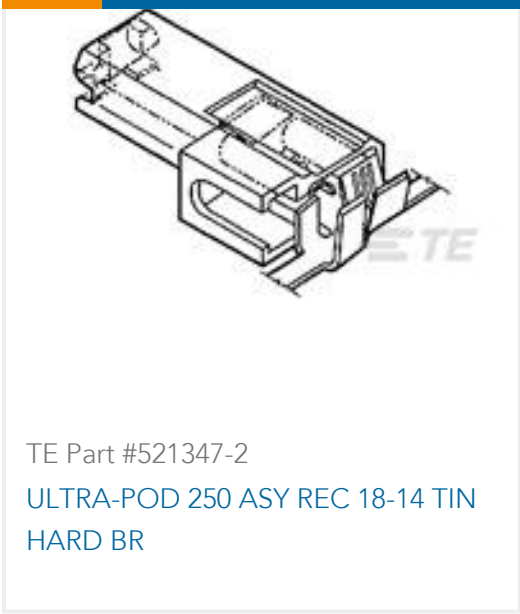

TE Part #521347-2  
ULTRA-POD 250 ASY REC 18-14 TIN  
HARD BR

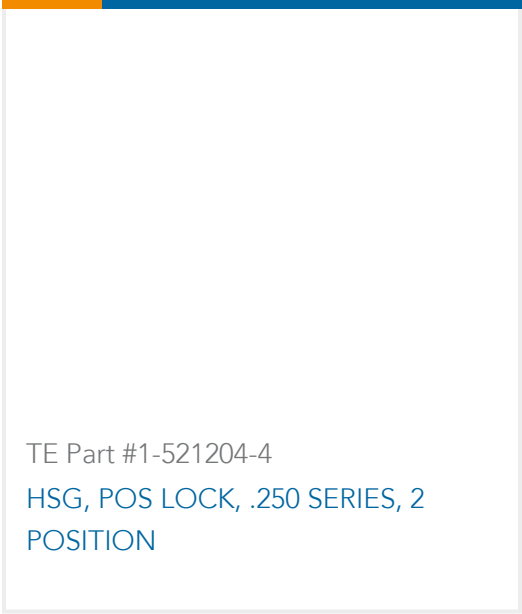

TE Part #1-521204-4  
HSG, POS LOCK, .250 SERIES, 2  
POSITION

Documents

Product Drawings

FASTON 375 AM REC 2-6MM2 0.2X1.062 BR

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_150530-1\_AB.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_150530-1\_AB.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_150530-1\_AB.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

EB\*\*General Application Specification for Open Barrel Terminals

English

Application Specification

English

Product Environmental Compliance

TE Material Declaration

English

150530-1

Quick Disconnects, Receptacle, 14 – 10 AWG Wire Size, 2.08 – 5.26 mm<sup>2</sup> Wire Size,  
Mating Tab Width .375 in [9.53 mm], Straight, Brass, FASTON 375

