


DO NOT SCALE
DIMENSIONS IN mm

METRIC

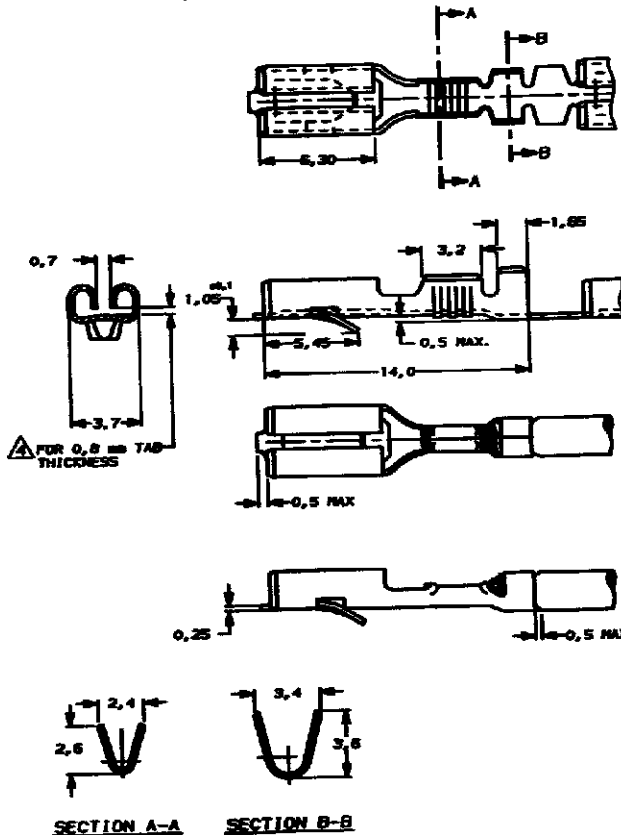

NOTES:

- ⚠ FOR USE ON MINIATURE APPLICATORS (LEFT-RIGHT FEED) AND STANDARD APPLICATORS (RIGHT-LEFT FEED).
- ⚠ BRASS ACC. ASTM B36 ALLOY 360.
- ⚠ PH. BRONZE ACC. ASTM B103.
- ⚠ GAGE 0.74 MUST NOT ENTER, GAGE 0.58 MUST ENTER.
- 5 REELED WITH PAPER COVER.
- 6 UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ± 0.4 mm.

DOC. CENTRE
08 JULI 1993

NOTES	FINISH	MATERIAL	PARTNUMBER
⚠	PH. BRONZE	PH. BRONZE 63Sn	160864-6
⚠	PH. BRONZE	PH. BRONZE 63Sn	160864-5
⚠	PRE-TINPLATED	PH. BRONZE 40Sn	160864-4
⚠	UNPLATED	PH. BRONZE 40Sn	160864-3
⚠	PRE-TINPLATED	BRASS	160864-2
⚠	UNPLATED	BRASS	160864-1

CUSTOMER DRAWING				FOR REFERENCE ONLY WILL NOT BE UPDATED	
-	-	-	-	© COPYRIGHT 19-- BY AMP HOLLAND B.V.	
-	-	-	-	ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.	
-	-	-	-	THIS DRAWING IS UNPUBLISHED	
-	-	-	-	UNLESS OTHERWISE SPECIFIED	
-	-	-	-	AMP HOLLAND B.V.	
-	-	-	-	's-Hertogenbosch, The Netherlands.	
AMP				.110 SERIES FASTIN-ON RECEPTACLE	
A	EH-0333-93	DK	PH	17-65-65	
L.T.R. REVISION RECORD		DR.	CHK.	DATE	
DR.	P. BOKER	CHK.	A. BILDER	APP.	
DATE:	12-08-89	DATE:		DATE:	18-7-93
WIRE RANGE : 0.5-1.0 mm ²		INSULATION RANGE : 1, 4-2, 3 DIA.		Dwg. No. C-160864	
DIRECTION OFF TOP OF REEL		REV. L.T.R.		SHEET 1 of 1	
A →		C		A3	