

product: DELPHI PN 15363934

material: CUSN6

VERSION I

surface: F.SN3

material thickness: 0,25 mm

cross section [mm²]: 0,5 | 0,75 | 1,0

strip length: 4,50 mm

cable type: FLRY-B

insulation ø [mm]: 1,40 - 2,10

seal: DPN 15324974

**Uncontrolled
Copy
For Information only!**

conductor dimension					crimp dimension [mm]						
cable type	cross sect. [mm ²]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation				
					height ± 0,05	width ± 0,10	height ± 0,10	width ± 0,10	height ± tol.	width ± tol.	
FLRY-B	0,5	16 x 0,21	1,50	80	1,15	1,90	3,70	4,05			
FLRY-B	0,75	24 x 0,21	1,80	120	1,25	1,90	3,80	4,05			
FLRY-B	1,0	32 x 0,21	2,00	160	1,35	1,95	3,90	4,05			


core:
C-1.85-3.5-12
DPN 10713713

insulation:
IS-4.00-3.0-12-X GD 66,5
DPN 10713788

anvil:

two piece anvil:
AC-1.85-3.75-A
DPN 10769987

AI-4.00-4.4-0.8-A
DPN 10769988

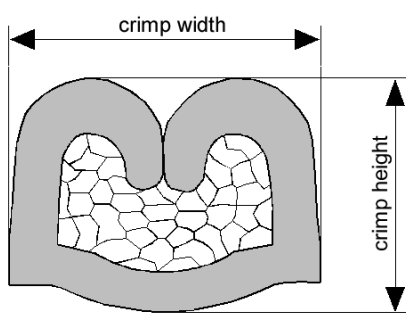


DELPHI PN 15363934



cable:
 $0,50 \text{ mm}^2 = 16 \times 0,21 \text{ mm}$

crimp height:
1,15 mm


crimp width:
1,90 mm

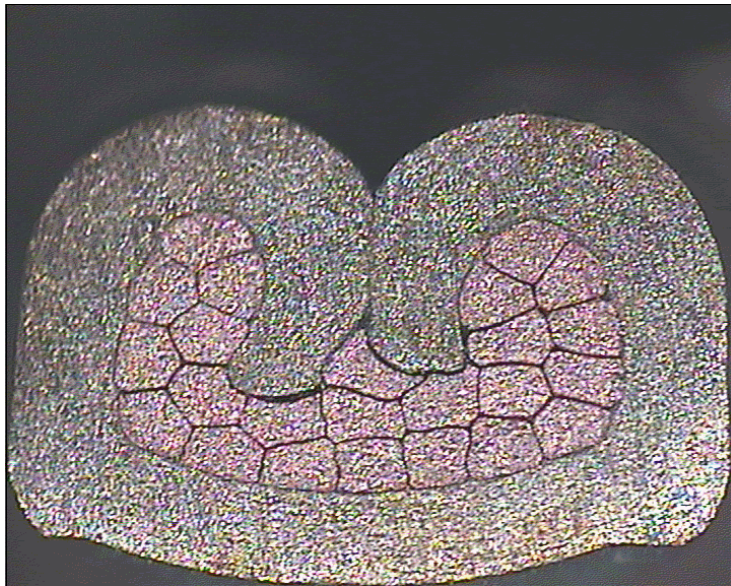

cable:
 $0,75 \text{ mm}^2 = 24 \times 0,21 \text{ mm}$

crimp height:
1,25 mm

crimp width:
1,90 mm

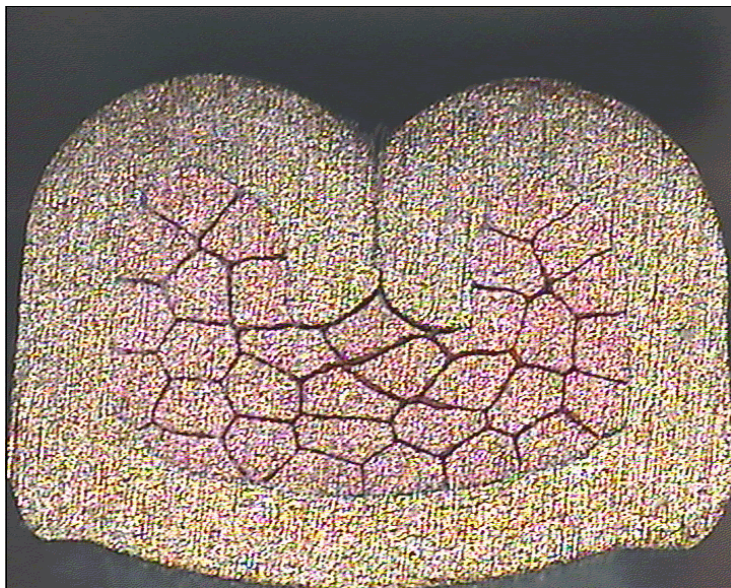

cable:
 $1,00 \text{ mm}^2 = 32 \times 0,21 \text{ mm}$

crimp height:
1,35 mm

crimp width:
1,95 mm